Performance and Registration Information Systems Management (PRISM)

SYSTEM SPECIFICATION

Version 7.0 October 2009

Changes applied to the PRISM System Specification V6.0, dated August 2008 to create V7.0

Change Summary

Major Changes:

- PRISM XML Targeted Vehicle and Carrier Output Transactions Previously details on the PRISM XML Targeted Vehicle and Carrier Output Transactions (T0041P and T0042P) were specified in a separate document from the PRISM System Specification. This document is now included as Appendix G to the PRISM System Specification. Section 4.8 now contains the data layout for the T0041P transaction and Section 4.9 contains the data layout for the T0042P transaction.
- 2. **PRISM Web Services** Appendix H has been added which describes in detail the PRISM Web Services. Section 6.4.4 *Identify Targeted Vehicles using Web Services* was added. In Section 3.3 clarified differences between PRISM Web Services and SAFER Web Services for performing Carrier and vehicle status inquires.
- 3. **Nlets Carrier and Vehicle Status Inquiries** The Nlets inquiries no longer use the Nlets/AAMVAnet Gateway to obtain the Carrier and Vehicle target status. These inquiries are now handled directly by Nlets. Section 6.4.2 *Nlets Carrier Status Inquiry*, Section 6.4.3 *Nlets Vehicle Status Inquiry*, and Appendix A *Nlets Message Formats* have been updated to reflect this. Additional clarifications on Nlets inquires were also made throughout document.

Other Changes:

- 1. **PRISM Data File Access** Previous Section 3.5 *Batch Software* was renamed *PRISM Data File Access* and rewritten to provide detail on accessing the PRISM generated files. Section number was changed to 3.4.
- 2. **PRISM File Summary** Added Table 4.1 *PRISM File Summary* to Section 4.2. This table provides detail on file sizes and availability.
- 3. Add Vehicle Suspension Indicator to State IRP System Section 6.4 was added describing this requirement. Previously this was included under Section 6.2.3 Alert IRP Registration Office Management of Nightly OOSO Vehicle Changes. This was made its own section to highlight it because States have been missing this requirement.
- 4. **MCSIP Step Changes** Appendix B was updated with the latest MCSIP Step Chart. The new chart includes updates to the OOSO MCSIP Steps.
- 5. IRP Vehicle Status Codes Appendix F was updated with the latest IRP Vehicle Status Codes. Deleted prior table containing 28 status codes. Replaced it with the following four values: 100 Active, 900 Inactive, 950 Suspended due to Federal Out-of-Service Order, 961 Vehicle Suspension Code. Added note about prior codes under review for possible retention.
- 6. Additional changes or clarifications are covered in the table below.

Section	Description of Change
Document	Minor spelling and grammatical corrections applied.
1.1	For Appendix A description: changed "NLETS" to "Nlets" and definition from "National Law Enforcement Telecommunications System" to "International Justice and Public Safety Sharing Network". Added "Appendix G -PRISM XML Transaction Specifications" to list of appendices Added "Appendix H, PRISM Web Services" to list of appendices
2.4	Deleted last four sentences regarding prior usage of EDI for data exchange.
2.4.1	Table 2.1: For Registration Requirement 4 added "State will require carriers and registrants to obtain their USDOT Numbers on line directly from MCMIS" as alternative process. For Registration Requirement 9 added "States can use CVIEW files to satisfy this requirement" under CVISN Data Process. For Registration Requirement 10 added "Process 6.2.3 - Alert IRP Registration Office Management of Nightly OOSO Vehicle Changes" under PRISM and CVISN Data Processes.
3.1.2	2 nd bullet changed "National Law Enforcement Telecommunications System" to "International Justice and Public Safety Sharing Network". 5 th bullet on network interface deleted. 4 th paragraph changed "The MCMIS Database contains records for more than one million entities" to "The MCMIS Database contains records for more than 1.7 million entities". 7 th paragraph added regarding SafeStat being replaced by the Comprehensive Safety Analysis (CSA) 2010 Measurement System mid-2010. Figure 3.1 modified to eliminate AAMVAnet NLETS Gateway. Added as last sentence to section "Nlets is maintaining the Local PRISM Target File to handle Targeted Carrier and Vehicle inquiries from law enforcement agencies."
3.2	Deleted 2 nd sentence "The AAMVAnet and NLETS Networks are connected by a system called the AAMVAnet/NLETS Gateway." Added at end of 1 st bullet "but this connection will be eliminated in the future." Modified 2 nd bullet to read "The Nlets network provides connections to Law Enforcement, PRISM States, and PRISM targeted carrier and vehicle data. Added 4 th bullet on the FMCSA COMPASS Portal.
3.2.3	Changed "NLETS" to "Nlets" throughout section and throughout rest of document. Added as 3 rd paragraph "Nlets developed the capability to store the PRISM Target File (Targeted Carriers and Vehicles) and instead of routing Carrier and Vehicle Inquiries (ACQ/AVQ) through the AAMVAnet Gateway to the PRISM Central Site, Nlets responds to those inquiries from their stored PRISM Target File."
3.2.4	Deleted Section "The AAMVAnet/NLETS Gateway"
3.3	Deleted Section "Unified Network Interface (UNI) Software". Sections above renumbered.
3.4	Section number changed to 3.3. Clarified use of PRISM Web Services and SAFER Web Services for performing Carrier and vehicle status inquires. Clarified using SAFER Web Services Carrier inquiry for validating USDOT numbers.
3.5	Section number changed to 3.4. Title changed from "Batch Software" to "PRISM Data File Access". Section rewritten.
3.6.1	Modified 1 st bullet to read "The PRISM Central Site Target File and Web Services will be available for interactive processing 24 hours a day, 7 days a week" Deleted 2 nd bullet "The Gateway operates on the same schedule as the PRISM Central Site Target File."
4	Added Table 4.1 – PRISM File Summary. Other table numbers in section have been incremented by 1.
4.2	Added "MCS-150 File" and "PRISM Targeted Carrier Output Transaction T0042P" to list of files
4.4	Table 4.3: The TIN Type FEIN/SSN and TIN fields were eliminated from the Local

	PRISM Carrier File. These fields were replaced by a Filler field.	
4.6.1	Table 4.5: The TIN Type FEIN/SSN and TIN fields were eliminated from the PRISM	
	Target File Carrier Record. These fields were replaced by a Filler field.	
4.8	Added Table specifying data in T0041P Transaction. Changed website reference for	
	document describing PRISM XML Transaction Specifications to Appendix G of this	
	document.	
4.9	Added Section 4.9 describing T0042P PRISM Targeted Carrier Output Transaction.	
5.1, 6.1, & 6.2	All references in subsections for availability of Census and Carrier files changed from	
0.1, 0.1, 00 0.2	"9:00pm (ET)" to "6:00am (ET)".	
5.1.3.6	1 st bullet: Clarified process for creating Local PRISM Target File.	
5.1.3.8	Subsection name changed from "PRISM/XML Targeted Vehicle Subscriptions,	
	Transaction T0041P" to "PRISM/XML Targeted Vehicle & Carrier Output	
	Transactions ". Subsection rewritten to include T0042P transaction. Previously it	
	only described T0041P transaction.	
5.1.3.9	Clarified 4 th bullet on downloading Local PRISM Target File. Deleted obsolete 5 th	
	bullet on delaying processing.	
5.1.3.13	3 rd paragraph, added 3 rd bullet "Process 6.3.3 Check Carrier Safety Status using Web Service"	
5.1.3.15	Table 5.1: Deleted 4 th row (was duplicate with 3 rd row) for checking if TIN is present.	
	Updated MCSIP step list in 1 st field of original 6 th row (now 5 th row in table).	
6.1	Figured 6.1: Added "or Need Operator Intervention" to return arrow from validating	
	USDOT Number + TIN.	
6.1.1.3.4	Deleted last two sentences (obsolete) regarding census file maintenance.	
6.1.1.2.2.3	Deleted obsolete 3 rd paragraph on validation.	
6.1.1.2.6.3	Changed "Validation: None Required" to "Validation: Optional"	
6.1.1.2.7.4	Deleted last three sentences (obsolete) regarding census file maintenance.	
6.1.2.2	First two paragraphs combined into on paragraph and clarified maintaining CVIEW	
	database.	
6.1.3	Added use of COMPASS Portal for accessing MCMIS and eventual elimination of	
	other access methods to 1st paragraph.	
6.1.3.1.3	Added query Carrier by Name to MCMIS queries supported.	
6.1.4	Changed title from "Web Services" to "SAFER Web Services".	
6.2.1.1.3.4	Deleted last three sentences (obsolete) regarding census data maintenance.	
6.2.3.2 & 6.3.1	Replaced "PRISM Targeted Vehicle Subscription (XML transaction T0041P)" with "PRISM XML Targeted Vehicle Transaction (T0041P)"	
6.2.3	2 nd paragraph removed and made section 6.2.4 - Add Vehicle Suspension Indicator to State IRP System.	
6.3	1 st sentence of 2 nd paragraph modified from "It is possible that a motor carrier may be	
	under a State registration suspension or revocation or a Federal Out of Service Order"	
	to "It is possible that a motor carrier may be under a Federal Out of Service Order".	
	3 rd paragraph modified from "The MCSIP Step Table contained in Appendix B can be	
	consulted to determine those values that represent State registration suspension or	
	revocation or Federal Out of Service Orders." to "The MCSIP Step Table contained in	
	Appendix B can be consulted to determine those values that represent Federal Out of	
	Service Orders."	
6.3.1	Added "Note: Since States need to download targeted vehicle data for doing the	
	Safety Status check by VIN, they could optionally just use downloaded targeted data	
	for doing all Safety Status checks." prior to last paragraph.	
6.3.1.1.2	Replaced two instances of "PRISM Targeted Vehicle Subscription (T0041P)(XML)"	
	with "PRISM XML Targeted Vehicle Transaction File (T0041P)"	
6.3.1.2.2	Eliminated manual inquiry into MCMIS.	
6.3.2.3.4	Deleted last three sentences (obsolete) regarding census file maintenance.	
6.3.2.4.2	Response from Local PRISM Target File modified to read "The response should be	
	formatted according to the State design; however it should include the USDOT	
	number associated with the vehicle."	

6.3.3	Under Business Process modified 3 instances of "SAFER / PRISM Web Services" to			
	"PRISM Web Services".			
6.4	Changed title from "Provide the Ability to Identify Targeted Vehicles" to "Provide			
	the Ability to Identify Targeted Vehicles at the Roadside". In Figure 6.16 changed			
	"NLETS/AAMVAnet Inquiry" to "Nlets Inquiry", deleted PRISM UNI Server box,			
	and added "Web Service" option. In Notes below Figure added "5 Web Service is			
	described in Section 6.4.4".			
6.4.1	Replaced 2 nd sentence "Query Central also requires the establishment of a Virtual			
Private Network (VPN) before access is granted to become an authorized user				
	With" Query Central is accessed through the FMCSA COMPASS portal."			
6.4.2	Renamed from "NLETS/AAMVAnet Carrier Inquiry" to "Nlets Carrier Status			
	Inquiry". Entire section modified to reflect Nlets responding to inquiries from their			
	stored PRISM Target File rather than thru Nlets/AAMVAnet gateway.			
6.4.3.	Renamed from "NLETS/AAMVAnet Vehicle Inquiry" to "Nlets Vehicle Status			
	Inquiry". Entire section modified to reflect Nlets responding to inquiries from their			
	stored PRISM Target File rather than thru Nlets/AAMVAnet gateway.			
6.4.4	Added Section 6.4.4 - Identify Targeted Vehicles using Web Services			
6.5	Figures 6.20 & 6.21 renumbered to 6.21 & 6.22			
6.5.1	Updated address of FMCSA PRISM Data Entry Contractor for sending the MC			
	forms to FMCSA-HQ for entry.			
Appendix A Updated to reflect elimination of Nlets/AAMVAnet gateway. Message l				
	updated to reflect new OOSO MCSIP Steps.			
Appendix B Replaced existing MCSIP Step Chart with latest MCSIP Step Chart. Th				
	includes updates to the OOSO MCSIP Steps.			
Appendix C	For VVHMAK (Make) replaced "This field will not be edited in PRISM processing."			
	with "If no value is supplied it will be filled with the value "UNKN" in PRISM files."			
	Attachment 1: Changed province code for Quebec from PQ to QC.			
Appendix D	MCMIS definition updated to include maintained by FMCSA.			
Appendix E	Deleted section titled NLETS Messages. Nlets messages are covered in Appendix A.			
Appendix F	Deleted prior table containing 28 status codes. Replaced it with the following four			
	values: 100 – Active, 900 – Inactive, 950 – Suspended due to Federal Out-of-Service			
	Order, 961 – Vehicle Suspension Code. Added note about prior codes under review			
	for possible retention.			
Appendix G	Added Appendix G: PRISM XML Transaction Specifications			
Appendix H	Added Appendix H: PRISM Web Services			

TABLE OF CONTENTS

1.	INTRODUCTION	1
1.1.	Organization of this Document	1
2.	APPLICATION DESCRIPTION	2
2.1. 2.1	Background	
2.2.	Scope	2
2.3.	PRISM Requirements	
2.3	1	
2.3	3.2. Law Enforcement Requirements	3
2.4.	Relationship of CVISN and PRISM	
2.4	PRISM Program Requirement and System Data Process Cross-Reference Chart	4
3.	SYSTEM ARCHITECTURE	6
3.1.	Overview of System Architecture	6
3.1		
3.1	.2. The Telecommunications Networks Which Transport PRISM Messages	6
3.2.	Telecommunications Network	
3.2		
3.2	2.2. Network Control Software	9
3.2	2.3. Nlets Network	9
3.3.	Web Services	11
3.4.	PRISM Data File Access	11
3.5.	Messages	12
3.6.	System Requirements Specification	13
	5.1. System Availability	
4.	DATA DESCRIPTION	14
4.1.	Introduction	14
4.2.	Data Maintenance Requirements	
4.2		
4.2	2.2. PRISM State Data Maintenance Requirements	16
4.3.	Local PRISM Census File	17
4.4.	Local PRISM Carrier File	18

4.5.	PRISM	1 Vehicle File	19
4.6.	Local 1	PRISM Target File	20
4.	6.1. Ca	arrier Record	20
4.	6.2. Vo	ehicle Record	21
4.7.	MCS-1	50 File	22
4.8.	T0041	P PRISM Targeted Vehicle Output Transaction	28
4.9.	T0042	P PRISM Targeted Carrier Output Transaction	29
5.	INTR(DDUCTION TO PROCESS SPECIFICATIONS	30
5.1.	Proces	s Introductions	30
		ocess Implementation Charts	
		ocess Specifications	
		ocessing Summary	
٠.	5.1.3.1.	Local PRISM CENSUS FILE.	
	5.1.3.2.	Local PRISM CARRIER FILE.	
	5.1.3.3.	PRISM VEHICLE FILE	
	5.1.3.4.	IRP Registration Input, Transaction T0022V3	
	5.1.3.5.	SAFER-PRISM Database Updates	
	5.1.3.6.	LOCAL PRISM TARGET FILE	
	5.1.3.7.	MCMIS Safety and Census Update, Transaction T0031	
	5.1.3.8.	PRISM/XML Targeted Vehicle & Carrier Output Transactions	
	5.1.3.9.	PRISM State File Initial Load Processes	
	5.1.3.10.	PRISM State File Maintenance Processes	34
	5.1.3.11.	FMCSA Sends MCMIS Database Updates	35
	5.1.3.12.	Vehicle Assigned to or Leaves MCSIP Carrier or Vehicle Information Changes	
	5.1.3.13.	State Registration Inquiry Processes	
	5.1.3.14.	Law Enforcement (Nlets) Inquiry Processes	
	5.1.3.15.	Validating PRISM Data Records received from or sent to the Volpe SFTP Site	36
6.	PRISM	I REQUIREMENTS AND PROCESS SPECIFICATIONS	38
6.1.	Requir	rement: Validate USDOT Number	38
6.	1.1. Ut	tilize Local PRISM Census File as Validation Database	39
	6.1.1.1.	Initialize or Refresh Local PRISM Census File	39
	6.1.1.2.	Maintain Local PRISM Census File	43
6.	1.2. Ut	tilize CVIEW as Validation Database	49
	6.1.2.1.	Initialize or Refresh CVIEW	49
	6.1.2.2.	Maintain CVIEW Database	52
6.	1.3. M	CMIS Database Query	
	6.1.3.1.	Submit Inquiry and Receive Response	
	6.1.3.2.	Process Inquiry and Provide Response	
6.		AFER Web Services	
	6.1.4.1.	Submit Inquiry and Receive Response	
	6.1.4.2.	Process Inquiry and Provide Response	58
6.2.		rement: Update SAFER-PRISM Database with Targeted Vehicles Nightly	
6.		se PRISM Vehicle File to Update SAFER-PRISM Database Nightly	
	6.2.1.1.	Create PRISM Vehicle File and Send to PRISM Central Site Nightly	
	6.2.1.2.	Update SAFER-PRISM Database with Targeted Vehicles	65

6.2.2. Use	e CVIEW to Update SAFER-PRISM Database Nightly	70
6.2.2.1.	Retrieve IRP Registration Updates and Build Reg Update File	
6.2.2.2.	Send IRP Vehicle & Registration Data to SAFER via CVIEW	71
6.2.2.3.	Retrieve IRP Updates and Apply to SAFER-PRISM Database	71
6.2.3. Ale	ert IRP Registration Office Management of Nightly OOSO Vehicle Changes	73
6.2.3.1.	Alert IRP Management within 24 hours when Vehicles Registered in their State	
to a Carrie	r affected by the Issuance or Rescission of a Federal Out-of-Service Order using the	he PRISM
Vehicle Fi	·	
6.2.3.2.	Alert IRP Management within 24 hours when Vehicles Registered in their State	are linked
to a Carrie	r affected by the Issuance or Rescission of a Federal Out-of-Service Order using C	CVIEW 73
6.2.4. Ad	d Vehicle Suspension Indicator to State IRP System	74
	ement: Check Carrier Safety Status before Registration is issued	
	eck Carrier Safety Status using CVIEW Database	
6.3.1.1.	Inquiry to CVIEW and Local PRISM Target File	
6.3.1.2.	Response from CVIEW & Local PRISM Target File	
	eck Carrier Safety Status using Local PRISM Target File	
6.3.2.1.	Extract Local PRISM Target File	
6.3.2.2.	Receive and Load local PRISM Target File	
6.3.2.3.	Resolve Errors	
6.3.2.4.	Check Carrier/Vehicle Safety Status	
	eck Carrier Safety Status using Web Services	
6.3.3.1.	Submit Inquiry and Receive Response	
6.3.3.2.	Process Inquiry and Provide Response	84
6.4. Require	ement: Provide the Ability to Identify Targeted Vehicles at the Roadside	95
	ICSA Query Central	
6.4.1.1.	Query Central Inquiry	
6.4.1.2.	Query Central Web Site	
	ets Carrier Status Inquiry	
6.4.2.1.	Retrieve the PRISM Target File	
6.4.2.2.	Send Carrier Status Request	
6.4.2.3.	Process and Forward to Law Enforcement	
6.4.2.4.	Receive Carrier Status Response	
	ets Vehicle Status Inquiry	
6.4.3.1.	Retrieve the PRISM Target File	
6.4.3.2.	Send Vehicle Status Request	
6.4.3.3.	Process and Forward to Law Enforcement	
6.4.3.4.	Receive Vehicle Status Response	
	entify Targeted Vehicles using Web Services	
6.4.4.1.	Submit Inquiry and Receive Response	
6.4.4.2.	Process Inquiry and Provide Response	
	1 7 1	
6.5. Require	ement: Perform MCS-150 Processing	96
6.5.1. Rea	newal MCS-150 Processing	98
6.5.1.1.	Send Old MCS-150 Form(s) to Registrant	99
6.5.1.2.	Carrier Completes MCS-150 & Returns	
6.5.1.3.	Receive Completed MCS-150 & Update MCMIS	100
6.5.1.4.	FMCSA Updates MCMIS	101
A. NLETS	MESSAGE FORMATS	A1
	luction	
	ets Message Header	
	- Carrier Status Request	
	- Carrier Response	

A.3	3.1 Message Layout for an ACR Response with Match Data	A3
A.4	ACQ/ACR - Carrier Status Request/Response Example	A5
A.5	5 AVQ - Vehicle Inquiry	A8
A.6	6 AVR - Vehicle Response	A8
A.6	Message Layout for an AVR Response with Match Data	A8
A.7	AVQ/AVR - Vehicle Status Request/Response Example	A10
A.8	Status Message (SM)	A13
В.	MCSIP Steps	B1
C.	Data Dictionary	C1
	·	
D.	Glossary	
Е.	Error Message Text	E1
F.	IRP Vehicle Status Codes	F1
G.	PRISM XML Targeted Vehicle & Carrier Output Transactions	
G.1 G.2		
G.2		
G.2	11 11 11 11 11 11 11 11 11 11 11 11 11	
G.2 G.2	1 0	
G.2 G.2		
	2.4.1 Information Transmitted	
G.2	•	
	2.5 T0042P, PRISM Targeted Carrier Transaction	
	2.5.2 Format/Record Layout	
G.2 G.2	·	
	2.6.1 Destination	
	2.6.2 Communication/Transmission Process	
	2.6.3 FMCSA SFTP Server Folder Structure	
	2.6.4 FMCSA SAFER FTP Server Folder Structure	
	2.6.5 Standards and Conventions	
	2.6.6 Conditional Processing	
	2.6.7 Data Validation	
	2.6.8 Error Processing/Recovery	
	2.6.9 Schedule/Frequency	
	2.6.10 Initiation Method	
	2.6.11 Synchronization/Dependencies	
	2.6.12 Priority	
G.2	2.6.13 Maximum Transaction Size	G6
H F	PRISM Web Services	Н1
H.1	Introduction	H1
H1.	.2 Interface Summary	H1
H1.	•	
H1.	· · · · · · · · · · · · · · · · · · ·	
H2		
H2.		
H2.	· · · · · · · · · · · · · · · · · · ·	
H2.	· · · · · · · · · · · · · · · · · · ·	
H2.	·	
H2.		

H2.6	PRISMUserChangepassword	H7
H2.7	To the second se	
Н3	PRISM Web Services WSDL	H8

LIST OF FIGURES

Figure 3.1 – PRISM System Architecture	7
Figure 3.2 – Nlets Network	10
Figure 6.1 – USDOT Number Validation	38
Figure 6.2 – Local PRISM Census File Generation	39
Figure 6.3 – Local PRISM Census File Maintenance	43
Figure 6.4 – CVIEW Database Creation	49
Figure 6.5 – CVIEW Database Maintenance	
Figure 6.6 – MCMIS Database Inquiry	55
Figure 6.7 – Web Service Database Inquiry	
Figure 6.8 – SAFER-PRISM Database Targeted Vehicle Updates	59
Figure 6.9 – PRISM State Vehicle File Creation	
Figure 6.10 – SAFER-PRISM Database Vehicle File Updates	65
Figure 6.11 – SAFER-PRISM Database CVIEW Updates	70
Figure 6.12 – Carrier Safety Status Checks	75
Figure 6.13 – CVIEW Carrier Safety Status Check	76
Figure 6.14 – Local PRISM Target File Carrier Safety Status Check	78
Figure 6.15 - Web Service Carrier Safety Check	83
Figure 6.16 – Targeted Vehicle Identification	85
Figure 6.17 – FMCSA Query Central Inquiry	
Figure 6.18 – Nlets Carrier Status Inquiry	
Figure 6.19 – Nlets Vehicle Status Inquiry	
Figure 6.20 – Web Service Targeted Vehicle Identification	
Figure 6.21 – MCS-150 Processing	
Figure 6.22 – Renewal MCS-150 Processing	
LIST OF TABLES	
Table 2.1 - PRISM Program Requirements and System Data Processes	
Table 4.1 –PRISM File Summary	
Table 4.2 – Local PRISM Census File Data Layout	
Table 4.3 – Local PRISM Carrier File Data Layout	
Table 4.4 –PRISM Vehicle File Data Layout	
Table 4.5 –PRISM Target File: Carrier Record Data Layout	
Table 4.6 –PRISM Target File: Vehicle Record Data Layout	
Table 4.7 – MCS-150 File Data Layout	
Table 4.8 – T0041P: PRISM Targeted Vehicle	
Table 4.9 – T0042P: PRISM Targeted Carrier	
Table 5.1 – PRISM Process Validation Edits	
Table 6.1 – MCMIS Database / PRISM Census File Data Field Differences	
Table 6.2 – Local PRISM Census File Carrier Updates	48
Table 6.3 – Sending Vehicle Registration Records to PRISM Central Site	63
Table 6.4 – PRISM Central Site Vehicle File Error Checking	
Table 6.5 – SAFER-PRISM Database Update Decision: Target File Carrier Records	68
Table 6.6 – SAFER-PRISM Database Update Decision: Target File or Compliance Review Vehicle	
Records	40

1. INTRODUCTION

This document presents the external specifications for the Performance and Registration Information Systems Management (PRISM) system supporting the PRISM Program. The specifications are written at a functional level. Additional detailed implementation specifications should be developed before implementation.

The objective of this document is to provide all the information necessary for States to develop their local systems to satisfy the PRISM Requirements and interface with the PRISM Central Site.

1.1. Organization of this Document

Section 2, Application Description – Provides project background, scope, and an implementation schedule.

Section 3, PRISM System Architecture - Explains the overall architecture, communications interfaces, and error processing rules.

Section 4, Data Description – Provides layouts for the files used by the system.

Section 5, Introduction to Process Specifications—Provides an overview to the detailed process specification.

Section 6, PRISM Requirements and Process Specifications – Provides requirements and specifications for PRISM processes that can be used to satisfy PRISM Requirements.

Appendix A, Nlets Message Formats – Provides specifications for messages going through the International Justice and Public Safety Sharing Network.

Appendix B, MCSIP Step Chart - Provides a chart showing the MCSIP Steps and their explanation.

Appendix C, Data Dictionary – Provides the format, valid values, and definition for all data used in the system.

Appendix D, Glossary – Lists the terms used in this document and their meanings.

Appendix E, Error Message Text – Provides a list of error messages.

Appendix F, IRP Vehicle Status Codes - Provides list and description of IRP Vehicle Status Codes

Appendix G, PRISM XML Targeted Vehicle & Carrier Output Transactions – Provides full details on PRISM XML files.

Appendix H, PRISM Web Services - Provides detail descriptions of available PRISM Web Services

2. APPLICATION DESCRIPTION

2.1. Background

2.1.1. Project Mandate

The U.S. Congress, in recognition of the problems associated with identifying and removing unsafe motor carriers from the nation's highways included Section 4003 in the Intermodal Surface Transportation Efficiency Act (ISTEA) of 1991. Section 4003 of the ISTEA mandated the Commercial Vehicle Information System (CVIS), (the name of the system was changed from the Commercial Vehicle Information System (CVIS) to the Performance and Registration Information Systems Management (PRISM)) to:

"Demonstrate methods of establishing an information system which will link the motor carrier safety information network system of the Department of Transportation and similar State systems with the motor vehicle registration and licensing systems of the States".

The information system is to allow the States, when issuing a license plate for a commercial motor vehicle, to determine the safety fitness of the motor carrier to which the registered vehicle is assigned and ensure the safety fitness of the motor carrier through sanctions/limitations on operations.

2.2. Scope

This document contains Processes (See Section 6) that have been developed to satisfy numerous PRISM Requirements. The States that participated in the PRISM Pilot operated solely with data provided by FMCSA or the PRISM Central Site. As States have begun to implement CVISN¹ additional sources of data are available that may be used to satisfy some PRISM Requirements. The differences between satisfying PRISM requirements using CVISN processes and PRISM processes are outlined in the tables provided in Section 2.4.

2.3. PRISM Requirements

The current list of PRISM Requirements is shown below. **Requirements that are addressed with PRISM System Processes are shown in bold.** These requirements are discussed further in Section 2.4.

2.3.1. IRP Registration Requirements

- 1. Identify, collect and maintain the USDOT Number and TIN for the <u>Registrant</u> and <u>Motor Carrier</u> responsible for the safe operation of each vehicle being registered.
- 2. Print and barcode the motor carrier information on the cab card if the person responsible for the safety of the vehicle is not expected to change during the registration year.
- 3. Validate the USDOT Number before adding any USDOT Number to the IRP registration files.

¹ The term commercial vehicle information systems and networks (CVISN, pronounced see' vision) refers to the Intelligent Transportation Systems (ITS) information system elements that support Commercial Vehicle Operations (CVO). CVISN includes information systems owned and operated by governments, carriers, and other stakeholders.

- 4. Have the capacity to issue USDOT Numbers by online access to the MCMIS Database using standardized procedures.
- 5. Incorporate PRISM requirements in temporary authority processes.
- 6. Seek and implement authority to suspend, revoke or deny registration if the Motor Carrier responsible for safety of the vehicle is prohibited from interstate operations.
- 7. Seek and implement authority to retrieve plates from carriers whose registration has been suspended, revoked or denied based on PRISM sanctions. (In some States this authority must be procured separately from the previous requirement)
- 8. Check carrier safety status before issuing credentials and deny the registration if the motor carrier is prohibited from interstate operations.
- 9. Maintain/update the USDOT Number and TIN for the Motor Carrier responsible for the safe operation of each vehicle being registered and require an update to the MCS-150 information at both the registrant and vehicle levels if not updated within the past year, prior to issuing registration credentials.
- 10. Update the PRISM Target File nightly with registration information for vehicles assigned to motor carriers in MCSIP.
- 11. Provide the ability to query registration files by USDOT Number of the registrant and motor carrier responsible for safety in order to obtain registration records details.
- 12. Provide assistance to FMCSA in finding correct addresses of motor carriers by inquiring registration files.
- 13. Provide motor carrier law enforcement with a report that lists vehicles and registration data for all vehicles assigned to a specific carrier upon request by the safety investigator/compliance review officer.
- 14. Ensure PRISM training is provided to all appropriate staff.
- 15. Ensure PRISM information and training are provided to Motor Carriers and other interested parties.
- 16. Ensure all appropriate staff attends MCMIS training.

2.3.2. Law Enforcement Requirements

- 1. Seek authority to stop and inspect vehicles based on the safety fitness of the motor carrier assigned to the vehicle. This requirement applies specifically to *probable cause* States.
- 2. Provide the ability to identify vehicles assigned to carriers in MCSIP and give these vehicles priority for inspection.
- 3. States must coordinate picking up plates with FMCSA Division Office.
- Implement procedures to determine how to correct the unassigned or incorrectly assigned safety events.

- 5. Ensure PRISM training is provided to all enforcement officers.
- 6. Provide authority for joint issuance (Federal and State) of the warning letter.
- 7. Improve the quality and completeness of data. (Joint effort for registration and enforcement)
- 8. If a State has chosen to perform the compliance reviews, collect motor carrier vehicle registration data during compliance reviews that may result in a future order to discontinue interstate operations.

2.4. Relationship of CVISN and PRISM

The PRISM and CVISN Programs both send IRP registration data to SAFER (Safety and Fitness Electronic Records) for related but different purposes. States may only send IRP registration data to SAFER via one data exchange route. Therefore States implementing both programs must implement a State CVIEW certified with PRISM business rules in order to send data to SAFER that satisfy both programs.

2.4.1. PRISM Program Requirement and System Data Process Cross-Reference Chart

Table 2.1 below identifies each system-related PRISM requirement and shows how the requirement can be satisfied using PRISM Data Processes, CVISN Data Processes, or Alternative Data Processes.

Table 2.1 - PRISM Program Requirements and System Data Processes

PRISM Program Requirement	PRISM Data Process	CVISN Data Process	Alternative System Processes
Registration Requirements			
3. Validate the USDOT Number of the motor carrier before adding any USDOT Number to the IRP registration files.	Process 6.1.1 – Utilize Local PRISM Census File as Validation Database Process 6.1.4 – Web Services	Process 6.1.2 – Utilize CVIEW as Validation Database	Process 6.1.3 – MCMIS Inquiry
4. Have the capacity to issue USDOT Numbers by online access to the MCMIS Database using standardized procedures	This process will use the same connection to MCMIS as that used in Section 6.1.3 but will issue a USDOT Number and update MCMIS.	This process will use the same connection to MCMIS as that used in Section 6.1.3 but will issue a USDOT Number and update MCMIS.	State will require carriers and registrants to obtain their USDOT Numbers on line directly from MCMIS.
8. Check carrier safety status (not safety rating) before issuing credentials and deny the registration if the motor carrier is under operations out-of-service order.	Process 6.3.2 – Check Carrier Safety Status using Local PRISM Target File Process 6.3.3 – Check Carrier Safety Status using Web Services	Process 6.3.1 – Check Carrier Safety Status using CVIEW Database	
9. Maintain/update the USDOT Number and TIN	Process 6.5.1 – Renewal MCS-150 Processing	States can use CVIEW files to satisfy this	N/A

PRISM Program	PRISM Data Process	CVISN Data Process	Alternative System	
Requirement			Processes	
Registration				
Requirements				
for the Motor Carrier responsible for the safe operation of each vehicle being registered and require an update to the MCS-150 information at both the registrant and vehicle levels if not updated within the		requirement.		
past year, prior to issuing registration credentials.				
10. Update the PRISM Target File nightly with registration information for vehicles assigned to motor carriers in MCSIP.	Process 6.2.1 – Use PRISM Vehicle File to update SAFER-PRISM Database Nightly Process 6.2.3.1 - Alert IRP Registration Office Management of Nightly OOSO Vehicle Changes	Process 6.2.2 – Use CVIEW to update SAFER-PRISM Database Nightly Process 6.2.3.2 - Alert IRP Registration Office Management of Nightly OOSO Vehicle Changes	N/A	
Enforcement Requirements				
2. Provide the ability to identify vehicles assigned to carriers in MCSIP and give these vehicles priority for inspections.	Process 6.3.2 – Check Carrier Safety Status using Local PRISM Target File Process 6.4.2 – Nlets Carrier Inquiry Process 6.4.3 – Nlets Vehicle Inquiry	Process 6.3.1 – Check Carrier Safety Status using CVIEW Database	Process 6.4.1 – Check Carrier Safety Status using Query Central	

3. SYSTEM ARCHITECTURE

3.1. Overview of System Architecture

3.1.1. The PRISM System Architecture

The PRISM system architecture shown in Figure 3.1 on the next page has the following components:

- The PRISM State that provides information for vehicles assigned to motor carriers in the Motor Carrier Safety Improvement Process (MCSIP)
- The system user (State or law enforcement) who originates PRISM inquiries about motor carriers and vehicles in MCSIP and receives responses from the PRISM Central Site.
- The SAFER system that receives daily and weekly updates from the MCMIS database and updates the SAFER-PRISM database.
- The PRISM Central Site that receives and stores PRISM data in the SAFER-PRISM database and processes PRISM inquiries.

3.1.2. The Telecommunications Networks Which Transport PRISM Messages

- AAMVAnet network for State users
- International Justice and Public Safety Sharing Network (Nlets) network for Law Enforcement
- The Internet for inquiries to the PRISM Central Site, SAFER, and MCMIS.
- The Internet for file transfers using the Volpe SFTP Site

The source of PRISM motor carrier Census data is the Federal Motor Carrier Safety Administration (FMCSA) Headquarters' Motor Carrier Management Information System (MCMIS) Database.

The MCMIS Database maintains a comprehensive record of the safety performance of motor carriers and hazardous materials shippers who are subject to the Federal Motor Carrier Safety Regulations or Hazardous Materials Regulations. The MCMIS Database is updated with data from SAFETYNET and the periodic running of SafeStat as well as other sources.

The MCMIS Database contains records for more than 1.7 million entities, i.e., motor carriers, hazardous material carriers, entities that are both a carrier and a shipper, and registrants (entities who register vehicles but are not carriers).

SAFETYNET is a program that allows States to enter information concerning enforcement actions, accidents, and inspections of motor carrier vehicles. This information is periodically transmitted to FMCSA and used to update the Accident, Law Enforcement, and Inspections Files. FMCSA uses information from these files to update the MCMIS Database.

SafeStat is a program run monthly against the MCMIS Database to identify motor carriers whose safety performance has fallen to a level requiring review. SafeStat identifies motor carriers whose vehicles have been found to be unsafe (through roadside inspections), have been involved in multiple accidents, or had several law enforcement actions taken. A SafeStat Indicator and a MCSIP Step are calculated for each motor carrier who has sufficient information maintained on the system. The MCSIP Step identifies the carrier's status in the safety improvement process. Carriers meeting the threshold criteria are identified and placed in MCSIP.

SafeStat will be replaced by the Comprehensive Safety Analysis (CSA) 2010 Measurement System mid-2010. The measurement system would group the safety performance data of motor carriers and drivers into seven categories, called BASICs – Behavioral Analysis Safety Improvement Categories. The seven

BASICs are: (1) Unsafe Driving, (2) Fatigued Driving, (3) Driver Fitness, (4) Controlled Substances/Alcohol, (5) Vehicle Maintenance, (6) Improper Loading/Cargo, and (7) Crash Indicator. The data would be scored and weighted based on its relationship to crash causation. Based on a carrier's score within each BASIC, the measurement system would trigger when the Agency should begin to intervene with a motor carrier, and when its performance has reached the proposed "unfit" threshold. Four States are currently participating in an Op-Model test in which motor carriers are being rated under FMCSA's current rating process in conjunction with the new CSA 2010 Safety Measurement System. The associated MCSIP Steps for the CSA BASICS are included in Appendix B.

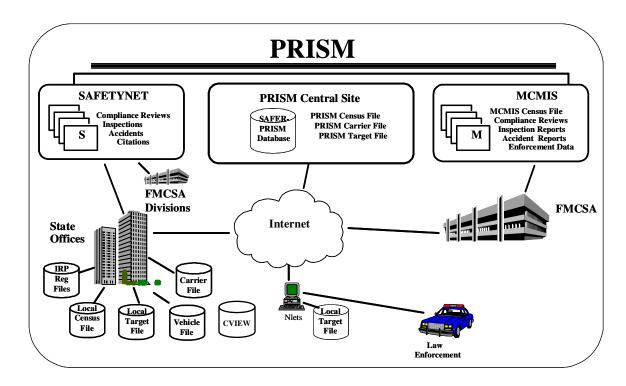


Figure 3.1 – PRISM System Architecture

PRISM data is maintained at the SAFER-PRISM Central Site on the SAFER-PRISM database. This database contains all of the data that supports both the PRISM Program and other SAFER functions. When the PRISM Central Site provides PRISM files for the States or responds to inquiries from the States, the Central Site accesses the SAFER-PRISM database to generate the required file or provide the requested record. The PRISM Central Site provides the Local PRISM Census File Daily Updates, the Daily Local PRISM Carrier File and (if requested) the Daily Local PRISM Target File to the PRISM States in a "flat file" format using the data elements described in Section 4. For states that implement a State CVIEW, the PRISM Central Site can also provide an XML transaction, T0041P, with the required vehicle registration information. The PRISM Central Site provides the PRISM files through the Volpe SFTP Site.

PRISM States may store the locally maintained PRISM files in any format they choose.

- 1. Local PRISM Census File contains information on all carriers in the FMCSA MCMIS Database
- 2. Local PRISM Carrier File contains information on only carriers in MCSIP
- 3. **PRISM Vehicle File** contains information on vehicles assigned to MCSIP carriers

- Local PRISM Target File contains information on carriers in MCSIP and vehicles assigned to them.
- 5. State CVIEW may store data from the T0041P in a separate table in the CVIEW database

The source of PRISM motor carrier information is the FMCSA MCMIS Database. The source of PRISM vehicle information is the State IRP registration files.

PRISM States may choose to maintain a Local PRISM Census File to satisfy the requirement to validate USDOT Numbers. If the State chooses to maintain a Local PRISM Census File, the PRISM Central Site will place the Daily Updates to the Local PRISM Census File on the Volpe SFTP Site each business day. PRISM States may also choose one of the alternative processes shown in Section 6.1 to validate the USDOT Number.

PRISM States may choose to maintain a Local PRISM Carrier file to generate the PRISM Vehicle File that is required to be sent to the PRISM Central Site every business night. CVISN/PRISM states must use an alternative process as shown in Section 6.2.2 to provide vehicle and registration data to the PRISM Central Site.

PRISM States may choose to maintain a Local PRISM Target file to check the Safety Status of a motor carrier prior to issuing IRP credentials or they may choose an alternative as shown in Section 6.3.

Nlets is maintaining the Local PRISM Target File to handle Targeted Carrier and Vehicle inquiries from law enforcement agencies.

3.2. Telecommunications Network

Several telecommunications networks are used in PRISM.

- The AAMVAnet network provides connections to PRISM States and the PRISM Central Site.
 AAMVAnet can also be used to access MCMIS but this connection will be eliminated in the future
- The Nlets network provides connections to Law Enforcement, PRISM States, and PRISM targeted carrier and vehicle data.
- The Internet is used for inquiries using Query Central, Web Services, and file transfers to/from the Volpe SFTP Site.
- The FMCSA COMPASS Portal is a gateway on the internet that provides single sign-on access to several FMCSA systems including MCMIS, EMIS, L&I, DataQs, Query Central, A&I, and SAFER, via a single password and user ID. Over time, the FMCSA Portal will provide access to all FMCSA existing systems.

3.2.1. AAMVAnet Network

AAMVAnet, Inc. provides value-added telecommunications network services through AT&T Global Network Services. This network enables a nationwide exchange of information and data communication services between government agencies and private sector businesses.

AAMVAnet provides communications capabilities including:

- Application to application, interactive
- Application to application, batch
- Application to remote terminal or remote printer

AAMVAnet subscribers can perform various types of communications and use various applications concurrently across a single physical connection. The ability to do this is dependent upon the capability of the subscriber's equipment (hardware and software).

3.2.2. Network Control Software

Network Control Software (NCS) is an AT&T Global Network Services product developed specifically to meet the needs of the AAMVA jurisdictions to route messages over the network. NCS buffers a system user from the different computer technologies used by the other participants in the system. NCS also allows each PRISM State and the PRISM Central Site to establish a single session with NCS, rather than requiring a site to have individual sessions with each other user.

The NCS is designed for application-to-application interactive communications. It supports SNA and TCP/IP communication protocols.

All States have a connection to NCS for the Commercial Drivers License Information System (CDLIS) and the Problem Driver Pointer System (PDPS). Some States may have additional connections supporting other AAMVAnet-developed applications.

3.2.3. Nlets Network

Nlets is a telecommunications network created for and dedicated to the criminal justice community. Its sole purpose is to provide for the interstate and/or interagency exchange of criminal justice and criminal justice related information.

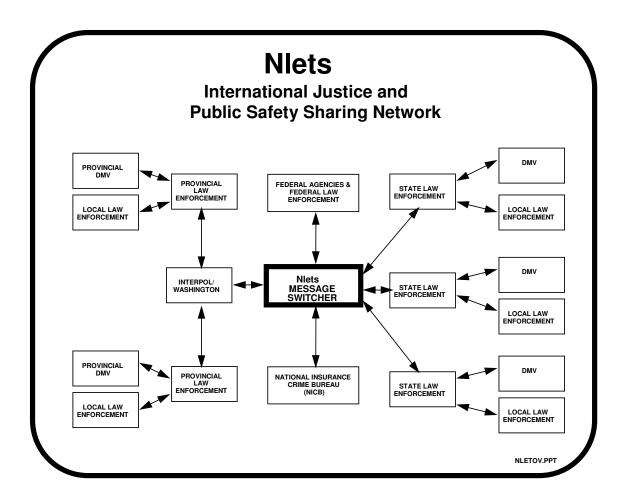


Figure 3.2 – Nlets Network

Nlets is a point-to-point network with its message switchers located at the Arizona Department of Public Safety in Phoenix, Arizona. Nlets can receive, store, and forward message traffic from and to all its user agencies.

Nlets developed the capability to store the PRISM Target File (Targeted Carriers and Vehicles) and instead of routing Carrier and Vehicle Inquiries (ACQ/AVQ) through the AAMVAnet Gateway to the PRISM Central Site, Nlets responds to those inquiries from their stored PRISM Target File.

Nlets users are primarily criminal justice agencies nationwide. Communications service is provided to the capital city of each State, the District of Columbia, Puerto Rico, and selected federal agencies. Normally, an Nlets connection to a State terminates at the Department of Public Safety (DPS) or comparable State agency. The DPS then has lines from its computer going to local law enforcement agencies and the Department of Motor Vehicles. There are also dedicated circuits between Interpol/Washington and Canada.

Nlets currently uses two DEC 6410 computers as message switchers. One computer is a 'hot' spare in the event problems occur with the primary computer. The software used for switching messages was developed by Planning Research Corporation (PRC) and is known as PRC Public Management System.

Nlets currently uses a 2780 bi-synchronous and TCP/IP protocols.

Nlets uses its own proprietary message format called the Nlets message format.

For a full description of Nlets, see the Nlets User Guide.

3.3. Web Services

States may use either PRISM Web Services or SAFER Web Services for performing Carrier and/or Vehicle inquiries. PRISM Web Services are more geared toward enforcement at the roadside, for instance interfacing with automated License Plate and DOT Number readers. SAFER Web Services are more geared toward use within a registration office. PRISM Web Services provide real-time safety status for carrier and vehicle inquiries. As such the MCSIP Step of the Safety Carrier is obtained from MCMIS for the query, thus the latest OOS status is returned. The carrier inquiry has an option of returning all vehicles associated with the carrier. Vehicle inquires may be by USDOT number, VIN, or State and License Plate Number. Full details on the PRISM Web Services interface and the available inquires are in Appendix H of this document. For States that want to use PRISM web services, PRISM Technical Support provides a PRISM Web Services Startup Package. This package is meant to be used as an example of how to use Microsoft Visual Studio .Net to build a Web Service Client for submitting queries to the PRISM Web Services and processing the resulting XML document which is returned by the PRISM Web Services server. The PRISM Web Services Startup Package can be obtained by contacting PRISMTechnicalSupport@Dot.Gov. In order to use the PRISM Web Services a VPN account and a PRISM user account and password are required. The VPN account can be obtained by contacting FMCTechSup@Dot.Gov. The PRISM user account can be obtained by contacting PRISMTechnicalSupport@Dot.Gov.


The SAFER Web Services provide the same information as that provided by the XML/FTP interface to SAFER, thus SAFER Web Services provide more complete information about carriers and vehicles than the PRISM web services including personally identifiable information (PII). Thus security requirements for PII information have to be followed when using SAFER Web Services. The SAFER Web Services do not obtain the MCSIP Step of the Safety Carrier from MCMIS for the query as PRISM web services does. The SAFER Web Services Carrier inquiry is available using the SAFER Web Services interface and the T0031 output transaction. The vehicle inquiry is available using the SAFER Web Services interface and the T0028V3 output transaction. Vehicle inquiries may be by VIN or by State and License Plate Number. Note, the SAFER Web Service vehicle inquiry using the T0028V3 output transaction will return PRSIM Vehicle File (PVF) records. This is different than the XML/FTP interface to SAFER using the T0028V3 output transaction which does not consider PVF records. The SAFER Web Services Carrier inquiry is available for validating USDOT numbers. The PRISM Web Services Carrier inquiry is not available for validating USDOT numbers as it does not return the Taxpayer Identification Number (i.e. TIN). Details on the SAFER Web Services interface and the T0031 and T0028V3 output transactions can be found in the SAFER Interface Control Document, Version 8.1 which can be obtained from the CVISN website at http://cvisn.fmcsa.dot.gov/default.aspx?PageID=safer. This Web Services application provides connectivity to the SAFER Web Services Server. In order to access this server a VPN and UAS account are required. Contact FMCTechSup@Dot.Gov for information on acquiring these accounts.

3.4. PRISM Data File Access

When transferring data files between a PRISM State and the PRISM Central Site, PRISM States will use the Volpe SFTP Site (Secure File Transfer Protocol). The Volpe SFTP Site is a secure server that contains current copies of the PRISM Files for States to download and is the destination for States to upload their Nightly PRISM Vehicle File.

To obtain an account for accessing the Volpe SFTP Site, the State/Vendor first needs to complete the FMCSA IT System-to-System Account Request Form. To get a copy of the form and instructions for how to complete the form, please contact PRISMTechnicalSupport@dot.gov. The form is to be faxed to the

FMCSA Technical Support group for approval and account creation. Once the account is created at Volpe, the PRISM SFTP Startup Package is sent to the user on a CD via Fed-Ex. The SFTP Startup Package contains a private key file associated to the account that is used to authenticate the connections to the SFTP Site. The startup package also includes two different methods for connecting to the site, batch files for automated connections, and the WinSCP client software for manual connections. The screenshot below displays the directory structure for the PRISM States accessing the Volpe SFTP Site.



The SAFER FTP Site (File Transfer Protocol) is used to transfer data between SAFER and the CVISN States, including those States implementing both CVISN and PRISM.

3.5. Messages

Messages within PRISM are sent:

- Online, via NCS (Network Control Software)
- Online, via Nlets
- Online through the Internet

The format of the data transmitted via Nlets is governed by Nlets. Details of each of the PRISM Nlets message are described in the Appendix A, Nlets Message Formats. See the Nlets User Guide for additional details about Nlets.

All batch files are sent in the file layouts as identified in Chapter 4. Error reports as described in Section 6 should be sent to PRISMTechnicalSupport@Dot.Gov as an attachment to an email. Appendix E, PRISM Error Messages provides a summary of error messages by process.

The business data elements are provided in Appendix C, Data Dictionary.

3.6. System Requirements Specification

3.6.1. System Availability

The PRISM Central Site will operate on the following schedule:

- The PRISM Central Site Target File and Web Services will be available for interactive processing 24 hours a day, 7 days a week.
- The Nlets network is in operation 24 hours a day, 7 days a week.

4. DATA DESCRIPTION

4.1. Introduction

This Section contains layouts for the files referenced in the Chapter 6, PRISM Requirements and Process Specifications.

The following column headers are used in the data tables in Sections 4.3 to 4.7 to describe the PRISM data files:

Field Name Description of the elementSize Length of the element

• Type of the element, 'N' is numeric, 'A' is alphabetic and 'A/N' is

Alphanumeric

Presence 'R' is required and 'O' is Optional

• Code The element code is used to reference the element in the Data Dictionary, App C

4.2. Data Maintenance Requirements

The SAFER-PRISM Database is a relational database that maintains data to support the extraction of the following PRISM Files.

- Local PRISM Census File This is a subset of the Census data contained in the MCMIS Database. A record exists for every entity that has been issued a USDOT Number. Since PRISM is primarily concerned with safety data, the record contains identification and safety information.
- Local PRISM Carrier File This file contains a record for every carrier that is in the MCSIP program. Slightly less carrier data is contained in this record when compared to the Local PRISM Census File.
- PRISM Vehicle File This is a file prepared by each PRISM State (unless CVIEW data or an approved alternative process is used) and contains vehicle and registration information on every vehicle assigned for safety to a MCSIP Carrier.
- Local PRISM Target File This is a file that PRISM States may request from the PRISM Central Site to assist the State in satisfying PRISM Requirements.
- MCS-150 File This is a file refreshed on a monthly basis from the MCMIS database that States may use for performing MCS-150 processing on the IRP renewal application.
- PRISM Targeted Vehicle Output Transaction T0041P XML transaction for use by CVISN states utilizing a CVIEW.
- PRISM Targeted Carrier Output Transaction T0042P XML transaction for use by CVISN states utilizing a CVIEW

Table 4.1 provides detail on file sizes and availability.

Table 4.1 –PRISM File Summary

File Name	Frequency	Total # of Records (as of 7-13-2009)	File Size (as of 7-13-2009)
Census Baseline (Full Refresh)	Ad-Hoc Request	1,792,889	133 MB Zipped 683 MB Unzipped
Census (Daily Updates)	Daily Mon-Fri 6:00AM	~ 2,000 (First Monday of each month has a larger update due to the monthly SafeStat run: ~ 150,000)	~ 1 MB (First Monday of each month has a larger update due to the monthly SafeStat run: ~ 60MB)
Carrier (Full Refresh)	Daily Mon-Fri 6:00AM	44,709	~ 11 MB
Target (Flat File - Carrier and Vehicle records)	Daily Mon-Sat 6:00AM	169,250	~ 22 MB
T0041P (XML Targeted Vehicle File)	Daily Mon-Sat 6:00AM	124,541	~ 4 MB Zipped ~ 55 MB Unzipped
T0042P (XML Targeted Carrier File)	Daily Mon-Fri 6:00AM	44,709	~ 3 MB Zipped ~ 25 MB Unzipped
MCS-150 (Full Refresh)	Monthly	1,792,889	197 MB Zipped 2.56 GB Unzipped

4.2.1. SAFER-PRISM Database Maintenance Requirements

The SAFER system is responsible for applying the daily and weekly MCMIS Database updates to the SAFER-PRISM Database. The SAFER system also maintains vehicle records on the SAFER-PRISM Database by applying daily IRP registration updates from CVISN States that use a CVIEW or CVIEW-equivalent. When a State that is participating in both PRISM and CVISN sends Vehicle or IRP Registration data to SAFER it must be sent via CVIEW only. PRISM requirements for data input validation and format are applied to the input files from the CVIEWs. States must coordinate with the Volpe Center to certify their CVIEWs to upload CVISN and PRISM data to SAFER. When the PRISM Central Site is required to provide PRISM States with the PRISM files or updates to PRISM files, the PRISM Central Site extracts the specific data required for the file or file updates and places the file or file updates on the Volpe SFTP Site.

The PRISM Central Site maintains vehicle records on the SAFER-PRISM database by receiving and applying nightly PRISM Vehicle File records from the PRISM States. The SAFER System also maintains vehicle records on the SAFER-PRISM Database by applying daily IRP vehicle registration updates from CVISN/PRISM States, and CVISN only States, using CVIEWs to upload data to SAFER. CVISN/PRISM States must maintain all of their vehicle records on the SAFER-PRISM database certified by PRISM.

4.2.2. PRISM State Data Maintenance Requirements

PRISM States may maintain a Local PRISM Census File, a Local PRISM Carrier File, and a Local PRISM Target File. PRISM States have the option of maintaining PRISM files or alternatives (i.e., CVIEW) as described in Section 6 to satisfy PRISM Requirements. PRISM States may create the PRISM Vehicle File for transmission to the Volpe SFTP Site or utilize an alternative process (CVIEW) as described in Section 6.

PRISM States who maintain their own Local PRISM Census File will receive daily Census File updates from the PRISM Central Site and must promptly and accurately apply them to the Local PRISM Census File.

PRISM States who maintain a local PRISM Carrier File must refresh the file with the full PRISM Carrier File received daily from the PRISM Central Site.

PRISM States who maintain a local PRISM Target File must refresh the file with the local PRISM Target File received daily from the PRISM Central Site.

In all of the above cases, PRISM Files or updates to PRISM Files will be available from the Volpe SFTP Site.

PRISM States who use a CVIEW to satisfy PRISM Requirements must promptly and accurately apply the daily updates as shown below: Note also that PRISM States who use a CVIEW to satisfy PRISM Requirements **must update SAFER on a daily basis** with all IRP vehicle registration transactions.

CVIEW

- Apply daily carrier maintenance transactions from SAFER to their local carrier census data.
- Provide daily registration maintenance transactions updates to SAFER.

CVISN/PRISM States who maintain a local T0041P XML table must refresh the file with the T0041P XML file retrieved daily from the Volpe SFTP site.

4.3. Local PRISM Census File

The Local PRISM Census File transferred to the PRISM States on a daily basis is a transactional file of activity that occurred in MCMIS since the last time the transactional file was provided by the PRISM Central Site. The MCMIS Database and the PRISM Census File both contain records on interstate and intrastate carriers. A record in the file is uniquely identified by:

• USDOT Number (MMCDO1)

Table 4.2 – Local PRISM Census File Data Layout

		Columns				
Field Name	Size	From	То	Type	Presence	Code
File Type	1	1	1	A	R	MRFFTP
MCSIP Flag	1	2	2	Α	0	XMCPFG
USDOT Number	7	3	9	N	R	MMCDO1
ICC Number	18	10	27	N	0	MMCICC
TIN Type FEIN/SSN	1	28	28	A/N	R	MMCTTY
TIN	9	29	37	N	R	MMCTIN
Carrier Legal Name	55	38	92	A/N	R	MMCLN1
Carrier "Doing Business As" Name	55	93	147	A/N	0	MMCDN1
Physical Address Street	30	148	177	A/N	R	MMCSTA
Physical Address City	25	178	202	A/N	R	MMCCIT
Physical Address State Code	2	203	204	A	R	MMCSTC
Physical Address Zip Code	5	205	209	A/N	R	MMCZIP
Physical Address Expanded Zip Code	5	210	214	A/N	0	MMCEZI
Physical Address County-Code	3	215	217	N	0	MMCCN1
Office Telephone Number	10	218	227	A/N	R	MMCPHN
Mailing Address Street	30	228	257	A/N	0	MMCMSA
Mailing Address City	25	258	282	A/N	0	MMCMCT
Mailing Address State Code	2	283	284	A	О	MMCMST
Mailing Address Zip Code	5	285	289	A/N	0	MMCMZ1
Mailing Address Expanded Zip Code	5	290	294	A/N	0	MMCMZ2
Mailing Address County-Code	3	295	297	N	О	MMCMCN
Carrier Status	1	298	298	A	R	MMCSTS
MCMIS File Create Date	8	299	306	N	R	MRFMCD
Date Added (USDOT Issue Date)	8	307	314	N	R	MMCDDT
MCMIS Last Update Date	8	315	322	N	R	MRFMLU
MCMIS Last Update User ID	8	323	330	A/N	О	MRFMUS
Entity Type	1	331	331	A	R	MMCENT
Carrier Interstate Operation Indicator	1	332	332	A	О	MMCIII
Filler (No longer used)	1	333	333	A	О	Filler
Carrier Intrastate Operation Non-Haz-Mat	1	334	334	A	0	MMCNHI
Carrier Intrastate Operation Haz-Mat	1	335	335	A	О	MMCHMI
MCSIP Step	2	336	337	N	R	MSFSTP
MCSIP Step Date	8	338	345	N	R	MSFSDA
SAFESTAT Indicator	3	346	348	N	О	MSFSSS
SAFESTAT Date	8	349	356	N	0	MSFSSD
Filler	17	357	373			
MCS-150 Last Update Date	8	374	381	N	0	X150LU

4.4. Local PRISM Carrier File

The Local PRISM Carrier File only contains records for carriers in the Motor Carrier Safety Improvement Process (MCSIP) and is used by PRISM States to identify these carriers. A record in the file is uniquely identified by:

• USDOT Number (MMCDO1)

Table 4.3 – Local PRISM Carrier File Data Layout

		Columns				
Field Name	Size	From	То	Type	Presence	Code
File Type	1	1	1	A	R	MRFFTP
MCSIP Flag	1	2	2	A	О	XMCPFG
USDOT Number	7	3	9	N	R	MMCDO1
Carrier Legal Name	55	10	64	A/N	R	MMCLN1
Carrier "Doing Business As" Name	55	65	119	A/N	О	MMCDN1
Physical Address Street	30	120	149	A/N	R	MMCSTA
Physical Address City	25	150	174	A/N	R	MMCCIT
Physical Address County-Code	3	175	177	N	О	MMCCN1
Physical Address State Code	2	178	179	A	R	MMCSTC
Physical Address Zip Code	5	180	184	A/N	R	MMCZIP
Physical Address Expanded Zip Code	5	185	189	A/N	О	MMCEZI
MCSIP Step	2	190	191	N	R	MSFSTP
MCSIP Step Date	8	192	199	N	R	MSFSDA
SAFESTAT Indicator	3	200	202	N	О	MSFSSS
SAFESTAT Date	8	203	210	N	О	MSFSSD
Filler	10	211	220			
PRISM Carrier File Create Date	8	221	228	N	R	MRFCCD
MCMIS Last Update Date	8	229	236	N	R	MRFMLU
MCMIS Last Update User ID	8	237	244	A/N	О	MRFMUS

4.5. PRISM Vehicle File

The PRISM Vehicle File contains vehicle information for those vehicles assigned to motor carriers that are in MCSIP (i.e., targeted vehicles). The information is built at the PRISM States and sent to the PRISM Central Site for inclusion in the PRISM Target File. A record in the PRISM Vehicle File is uniquely identified by:

- USDOT Number (MMCDO1)
- VIN (VVHVIN)
- Plate Number (VRGPLN)

Table 4.4 -PRISM Vehicle File Data Layout

		Columns				
Field Name	Size	From	To	Type	Presence	Code
File Type	1	1	1	A	R	MRFFTP
Record Type	1	2	2	A	R	MRFRTP
USDOT Number	7	3	9	N	R	MMCDO1
VIN	17	10	26	A/N	R	VVHVIN
Plate Number	10	27	36	A/N	R	VRGPLN
Registration Jurisdiction	2	37	38	A	R	VRGJUR
Registration Date Effective	8	39	46	N	R	VRGDEF
Registration Date Expiration	8	47	54	N	R	VRGDEX
Make	4	55	58	A/N	R	VVHMAK
Model Year	4	59	62	N	R	VVHMYE
PRISM Carrier File Create Date	8	63	70	N	R	MRFCCD
PRISM Vehicle File Create Date	8	71	78	N	R	MRFVCD

4.6. Local PRISM Target File

The Local PRISM Target File is built at the PRISM Central Site and contains a carrier record for each motor carrier in MCSIP (extracted from the SAFER-PRISM database). It may contain one or more vehicle records, provided by the PRISM States, for each vehicle assigned to a motor carrier in MCSIP.

Each carrier and vehicle record contains a Target Indicator that indicates whether the record is targeted (i.e., the carrier/vehicle is currently in MCSIP).

The Local PRISM Target File should not contain more than one target carrier record with the same USDOT Number or more than one target vehicle record from a State with the same USDOT Number and VIN.

4.6.1. Carrier Record

Carrier records on the PRISM Target File are uniquely identified by:

- USDOT Number (MMCDO1)
- Carrier Target Date (MRFCHD)

Table 4.5 - PRISM Target File: Carrier Record Data Layout

		Columns				
Field Name	Size	From	To	Type	Presence	Code
File Type	1	1	1	A	R	MRFFTP
Record Type	1	2	2	A	R	MRFRTP
USDOT Number	7	3	9	N	R	MMCDO1
Carrier Legal Name	55	10	64	A/N	R	MMCLN1
Carrier "Doing Business As" Name	55	65	119	A/N	О	MMCDN1
Physical Address Street	30	120	149	A/N	R	MMCSTA
Physical Address City	25	150	174	A/N	R	MMCCIT
Physical Address County-Code	3	175	177	N	О	MMCCN1
Physical Address State Code	2	178	179	A	R	MMCSTC
Physical Address Zip Code	5	180	184	A/N	R	MMCZIP
Physical Address Expanded Zip Code	5	185	189	A/N	0	MMCEZI
MCSIP Step	2	190	191	N	R	MSFSTP
MCSIP Step Date	8	192	199	N	R	MSFSDA
SAFESTAT Indicator	3	200	202	N	О	MSFSSS
SAFESTAT Date	8	203	210	N	О	MSFSSD
Filler	10	211	220			
PRISM Carrier File Create Date	8	221	228	N	R	MRFCCD
MCMIS Last Update Date	8	229	236	N	R	MRFMLU
MCMIS Last Update User ID	8	237	244	A/N	О	MRFMUS
Carrier Target Indicator	1	245	245	A	R	MRFCTH
Carrier Target Date	8	246	253	N	О	MRFCHD

4.6.2. Vehicle Record

Vehicle records on the PRISM Target File are uniquely identified by:

- USDOT Number (MMCDO1)
- VIN (VVHVIN)
- Plate Number (VRGPLN)
- Registration Jurisdiction (VRGJUR)

Table 4.6 -PRISM Target File: Vehicle Record Data Layout

		Columns				
Field Name	Size	From	То	Type	Presence	Code
File Type	1	1	1	A	R	MRFFTP
Record Type	1	2	2	A	R	MRFRTP
USDOT Number	7	3	9	N	R	MMCDO1
VIN	17	10	26	A/N	R	VVHVIN
Plate Number	10	27	36	A/N	R	VRGPLN
Registration Jurisdiction	2	37	38	A	R	VRGJUR
Registration Date Effective	8	39	46	N	R	VRGDEF
Registration Date Expiration	8	47	54	N	R	VRGDEX
Make	4	55	58	A/N	R	VVHMAK
Model Year	4	59	62	N	R	VVHMYE
PRISM Carrier File Create Date	8	63	70	N	R	MRFCCD
PRISM Vehicle File Create Date	8	71	78	N	R	MRFVCD
Vehicle Target Indicator	1	79	79	A	R	MRFVTH
Vehicle Target Date	8	80	87	N	О	MRFVHD

4.7. MCS-150 File

The MCS-150 File maintained at the PRISM Central Site is available for downloading from the Volpe SFTP Site. This file is refreshed on a monthly basis from the MCMIS Database. PRISM States desiring to use the MCS-150 file in their PRISM processing should contact PRISMTechnicalSupport@Dot.Gov for instructions and software to use for downloading the MCS-150 File.

Table 4.7 – MCS-150 File Data Layout

	MCS-150	Colu	ımns			PRISM
MCS-150 Data Elements	Field	Start	End	Type	Length	CODE
Status		1	1	A/N	1	MMCSTS
Legal Name	1	2	121	A/N	120	XMCLN1
"Doing Business As" Name	2	122	241	A/N	120	XMCDN1
Physical Address/Street	3	242	291	A/N	50	MMCSTA
Physical Address/City	4	292	316	A/N	25	MMCCIT
Physical Address/State Code	5	317	318	A/N	2	XPADDS
Physical Address/Zip Code	6	319	328	A/N	10	XPADDZ
Mexican Neighborhood/Physical	7	329	428	A/N	100	XMEXPH
Mailing Address/Street	8	429	478	A/N	50	MMCMSA
Mailing Address/City	9	479	503	A	25	XMADDS
Mailing Address/State Code	10	504	505	A/N	2	MMCMST
Mailing Address/Zip Code	11	506	515	A/N	10	XMADDZ
Mexican Neighborhood/Mailing	12	516	615	A/N	100	XMEXMA
Office Telephone Number	13	616	625	A/N	10	MMCPHN
Cellular Telephone Number	14	626	635	A/N	10	XMCCPH
Office Fax Number	15	636	645	A/N	10	XFAXPH
USDOT Number	16	646	657	N	12	XMCD01
ICC Docket Number/First	17	658	663	A/N	6	MMCICC
ICC Docket Number/Second	17	664	669	A/N	6	MMCICC
ICC Docket Number/Third	17	670	675	A/N	6	MMCICC
Dun & Bradstreet Number	18	676	684	A/N	9	XDBNUM
Social Security Number	19	685	693	N	9	XMCSSN
Employer Federal ID Number	19	694	702	N	9	XMCFEI
Email Address	20	703	782	A/N	80	XEMAIL
Operation/Carrier/Interstate	22A	783	783	A/N	1	MMCIII
Operation/Carrier/Intrastate/HAZ-MAT	22B	784	784	A/N	1	MMCHMI
Operation/Carrier/Intrastate/Non HAZ-MAT	22C	785	785	A/N	1	MMCNHI
Operation/Shipper/Interstate	22D	786	786	A	1	XSHPIN
Operation/Shipper/Intrastate	22E	787	787	A	1	XSHPHM
Vehicle Registrant	22F	788	788	A/N	1	XVEHRG
Mileage/Calendar Year/MCS-150	21	789	798	N	10	XMILYR
Mileage/MCS-150/Year	21	799	802	N	4	X150DT
Classification	23A-L	803	814	A	12	XCLASS
Classification Other Defined	23OTH	815	864	A	50	XCLOTH

	MCS-150	Colu	ımns			PRISM
MCS-150 Data Elements	Field	Start	End	Type	Length	CODE
	DEF					
Cargo Transported/A: General Freight	24A	865	865	A	1	XGNFRT
Cargo Transported/B: Household Goods	24B	866	866	A	1	XGNHSG
Cargo Transported/C: Metal, Sheets, Coils, Rolls	24C	867	867	A	1	XGNMET
Cargo Transported/D: Motor Vehicles	24D	868	868	A	1	XGNMOV
Cargo Transported/E: Driveaway/Towaway	24E	869	869	A	1	XGNDRV
Cargo Transported/F: Logs, Poles, Beams, Lumber	24F	870	870	A	1	XGNPOL
Cargo Transported/G: Building Materials	24G	871	871	A	1	XGNMAT
Cargo Transported/H: Mobile Homes	24H	872	872	A	1	XGNMOB
Cargo Transported/I: Machinery, Large Objects	24I	873	873	A	1	XGNMAC
Cargo Transported/J: Fresh Produce	24J	874	874	A	1	XGNPRO
Cargo Transported/K Liquids/Gases	24K	875	875	A	1	XGNLIQ
Cargo Transported/L: Intermodal Cont.	24L	876	876	A	1	XGNINT
Cargo Transported/M: Passengers	24M	877	877	A	1	XGNPAX
Cargo Transported/N: Oilfield Equipment	24N	878	878	A	1	XGNOIL
Cargo Transported/O: Livestock Containers	24O	879	879	A	1	XGNLIV
Cargo Transported/9: Grain, Feed, Hay	24P	880	880	A	1	XGNHAY
Cargo Transported/Q: Coal/Coke	24Q	881	881	A	1	XGNCOL
Cargo Transported/R: Meat	24R	882	882	A	1	XGNMEA
Cargo Transported/S: Garbage, Refuse, Trash	24S	883	883	A	1	XGNGAR
Cargo Transported/T: U.S. Mail	24T	884	884	A	1	XGNUSM
Cargo Transported/U: Chemicals	24U	885	885	A	1	XGNCHE
Cargo Transported/V: Commodities, Dry Bulk	24V	886	886	A	1	XGNDRY
Cargo Transported/W: 'Refrigerated Food	24W	887	887	A	1	XGNREF
Cargo Transported/X: Beverages	24X	888	888	A	1	XGNBEV
Cargo Transported/Y: Paper Products	24Y	889	889	A	1	XGNPAR
Cargo Transported/Z: Utility	24Z	890	890	A	1	XGNUTL
Cargo Transported/AA: Farm Supplies	24AA	891	891	A	1	XGNFAR
Cargo Transported/ BB: Construction	24BB	892	892	A	1	XGNCON
Cargo Transported/CC: Water - Well	24CC	893	893	A	1	XGNWAT
Cargo Transported/DD: Other	24DD	894	894	A	1	XGNOTH
Cargo Transported/ Other Defined	24OTH	895	944	A/N	50	XGNDEF
Cargo Transported Other Bernied	DEF	0,5	7	11,11	30	HOLDEL
Hazardous Materials Carried/ A: Division 1.1	25A	945	945	A	1	XHCDVA
Hazardous Materials Carried/ B: Division 1.2	25B	946	946	A	1	XHCDVB
Hazardous Materials Carried/ C: Division 1.3	25C	947	947	A	1	XHCDVC
Hazardous Materials Carried/ D: Division 1.4	25D	948	948	A	1	XHCDVD
Hazardous Materials Carried/ E: Division 1.5	25E	949	949	A	1	XHCDVE
Hazardous Materials Carried/F: Division 1.6	25F	950	950	A	1	XHCDVF
Hazardous Materials Carried/ G: Division 2.1	25G	951	951	A	1	XHCDVG
Hazardous Materials Carried/ H: Division 2.1LPG	25H	952	952	A	1	XHCDVH
Hazardous Materials Carried/ I: Division 2.1(METHANE)	25I	953	953	A	1	XHCDVI
Hazardous Materials Carried/ J: Division 2.2	25J	954	954	A	1	XHCDVJ
Hazardous Materials Carried/ K: Division 2.2A	25K	955	955	A	1	XHCDVK

	MCS-150	6-150 Columns				PRISM
MCS-150 Data Elements	Field	Start	End	Type	Length	CODE
(AMMONIA)						
Hazardous Materials Carried/ L: Division 2.3A	25L	956	956	A	1	XHCDVL
Hazardous Materials Carried/ M: Division 2.3B	25M	957	957	A	1	XHCDVM
Hazardous Materials Carried/ N: Division 2.3C	25N	958	958	A	1	XHCDVN
Hazardous Materials Carried/ O: Division 2.3D	25O	959	959	Α	1	XHCDVO
Hazardous Materials Carried/ P: Class 3	25P	960	960	Α	1	XHCDVP
Hazardous Materials Carried/ Q: Class 3A	25Q	961	961	Α	1	XHCDVQ
Hazardous Materials Carried/ R: Class 3B	25R	962	962	Α	1	XHCDVR
Hazardous Materials Carried/ S: Comb Liquid	25S	963	963	Α	1	XHCDVS
Hazardous Materials Carried/ T: Division 4.1	25T	964	964	Α	1	XHCDVT
Hazardous Materials Carried/ U: Division 4.2	25U	965	965	Α	1	XHCDVU
Hazardous Materials Carried/ V: Division 4.3	25V	966	966	Α	1	XHCDVV
Hazardous Materials Carried/ W: Division 5.1	25W	967	967	A	1	XHCDVW
Hazardous Materials Carried/ X: Division 5.2	25X	968	968	A	1	XHCDVX
Hazardous Materials Carried/ Y: Division 6.2	25Y	969	969	A	1	XHCDVY
Hazardous Materials Carried/ Z: Division 6.1A	25Z	970	970	A	1	XHCDVZ
Hazardous Materials Carried/ AA: Division 6.1B	25AA	971	971	A	1	XHCDAA
Hazardous Materials Carried/ BB: Division 6.1 POISON	25BB	972	972	A	1	XHCDBB
Hazardous Materials Carried/ CC: Division 6.1Solid	25CC	973	973	A	1	XHCDCC
Hazardous Materials Carried/ DD: Class 7	25DD	974	974	A	1	XHCDDD
Hazardous Materials Carried/ EE: HWY Route CNTR QY	25EE	975	975	A	1	XHCDEE
Hazardous Materials Carried/ FF: Class 8	25FF	976	976	Α	1	XHCDFF
Hazardous Materials Carried// GG: Class 8A	25GG	977	977	A	1	XHCDGG
Hazardous Materials Carried/ HH: Class 8B	25HH	978	978	Α	1	XHCDHH
Hazardous Materials Carried/ II: Class 9	25II	979	979	A	1	XHCDII
Hazardous Materials Carried/ JJ: Elevated Temp Mat	25JJ	980	980	A	1	XHCDJJ
Hazardous Materials Carried/ KK: Infectious Waste	25KK	981	981	A	1	XHCDKK
Hazardous Materials Carried/ LL: Marine Pollutant	25LL	982	982	A	1	XHCDLL
Hazardous Materials Carried/ MM: Hazardous Sub (RQ)	25MM	983	983	A	1	XHCDMM
Hazardous Materials Carried/ NN: Hazardous Waste	25NN	984	984	Α	1	XHCDNN
Hazardous Materials Carried/ OO: ORM	2500	985	985	Α	1	XHCDOO
Hazardous Materials Shipped/ A: Division 1.1	25A	986	986	A	1	XHSDVA
Hazardous Materials Shipped/ B: Division 1.2	25B	987	987	Α	1	XHSDVB
Hazardous Materials Shipped/ C: Division 1.3	25C	988	988	Α	1	XHSDVC
Hazardous Materials Shipped/ D: Division 1.4	25D	989	989	A	1	XHSDVD
Hazardous Materials Shipped/ E: Division 1.5	25E	990	990	Α	1	XHSDVE
Hazardous Materials Shipped/F: Division 1.6	25F	991	991	A	1	XHSDVF
Hazardous Materials Shipped/ G: Division 2.1	25G	992	992	A	1	XHSDVG
Hazardous Materials Shipped/ H: Division 2.1LPG	25H	993	993	A	1	XHSDVH
Hazardous Materials Shipped/ I: Division 2.1(METHANE)	25I	994	994	A	1	XHSDVI
Hazardous Materials Shipped/ J: Division 2.2	25J	995	995	A	1	XHSDVJ

	ımns			PRISM		
MCS-150 Data Elements	MCS-150 Field	Start	End	Type	Length	CODE
Hazardous Materials Shipped/ K: Division 2.2A (AMMONIA)	25K	996	996	A	1	XHSDVK
Hazardous Materials Shipped/ L: Division 2.3A	25L	997	997	A	1	XHSDVL
Hazardous Materials Shipped/ M: Division 2.3B	25M	998	998	A	1	XHSDVM
Hazardous Materials Shipped/ N: Division 2.3C	25N	999	999	A	1	XHSDVN
Hazardous Materials Shipped/ O: Division 2.3D	250	1000	1000	A	1	XHSDVO
Hazardous Materials Shipped/ P: Class 3	25P	1001	1001	A	1	XHSDVP
Hazardous Materials Shipped/ Q: Class 3A	25Q	1002	1002	A	1	XHSDVQ
Hazardous Materials Shipped/ R: Class 3B	25R	1003	1003	A	1	XHSDVR
Hazardous Materials Shipped/ S: Comb Liquid	25S	1004	1004	A	1	XHSDVS
Hazardous Materials Shipped/ T: Division 4.1	25T	1005	1005	A	1	XHSDVT
Hazardous Materials Shipped/ U: Division 4.2	25U	1006	1006	A	1	XHSDVU
Hazardous Materials Shipped/ V: Division 4.3	25V	1007	1007	A	1	XHSDVV
Hazardous Materials Shipped/ W: Division 5.1	25W	1008	1008	A	1	XHSDVW
Hazardous Materials Shipped/ X: Division 5.2	25X	1009	1009	A	1	XHSDVX
Hazardous Materials Shipped/ Y: Division 6.2	25Y	1010	1010	A	1	XHSDVY
Hazardous Materials Shipped/ Z: Division 6.1A	25Z	1011	1011	A	1	XHSDVZ
Hazardous Materials Shipped/ AA: Division 6.1B	25AA	1012	1012	A	1	XHSDAA
Hazardous Materials Shipped/ BB: Division 6.1 POISON	25BB	1013	1013	A	1	XHSDBB
Hazardous Materials Shipped/ CC: Division 6.1Solid	25CC	1014	1014	A	1	XHSDCC
Hazardous Materials Shipped/ DD: Class 7	25DD	1015	1015	A	1	XHSDDD
Hazardous Materials Shipped/ EE: HWY Route CNTR QY	25EE	1016	1016	A	1	XHSDEE
Hazardous Materials Shipped/ FF: Class 8	25FF	1017	1017	A	1	XHSDFF
Hazardous Materials Shipped/ GG: Class 8A	25GG	1018	1018	A	1	XHSDGG
Hazardous Materials Shipped/ HH: Class 8B	25HH	1019	1019	A	1	XHSDHH
Hazardous Materials Shipped/ II: Class 9	25II	1020	1020	A	1	XHSDII
Hazardous Materials Shipped/ JJ: Elevated Temp Mat	25JJ	1021	1021	A	1	XHSDJJ
Hazardous Materials Shipped/ KK: Infectious Waste	25KK	1022	1022	A	1	XHSDKK
Hazardous Materials Shipped/ LL: Marine Pollutant	25LL	1023	1023	A	1	XHSDLL
Hazardous Materials Shipped/ MM: Hazardous Sub (RQ)	25MM	1024	1024	A	1	XHSDMM
Hazardous Materials Shipped/ NN: Hazardous Waste	25NN	1025	1025	A	1	XHSDNN
Hazardous Materials Shipped/ OO: ORM	2500	1026	1026	A	1	XHSDOO
# Equipment Units Owned/ Trucks	26	1027	1031	A/N	5	XOWNTK
# Equipment Units Owned/ Tractors	26	1032	1036	A/N	5	XOWNTS
# Equipment Units Owned/ Trailers	26	1037	1041	A/N	5	XOWNTL
# Equipment Units Owned/ HAZ-MAT Tank Truck	26	1042	1046	A/N	5	XOWNHK
# Equipment Units Owned/ HAZ-MAT Tank Trailer	26	1047	1051	A/N	5	XOWNHT
# Equipment Units Owned/ Motor Coach	26	1052	1056	A/N	5	XOWNMC
# Equipment Units Owned/ School Bus 1-8	26	1057	1061	A/N	5	XOSB1
# Equipment Units Owned/ School Bus 9-15	26	1062	1066	A/N	5	XOSB9
# Equipment Units Owned/ School Bus 16+	26	1067	1071	A/N	5	XOSB16
# Equipment Units Owned/ Mini Bus	26	1072	1076	A/N	5	XOWNMB

	MCS-150	Columns				PRISM
MCS-150 Data Elements	Field	Start	End	Type	Length	CODE
# Equipment Units Owned/ Van 1-8	26	1077	1081	A/N	5	XOWNV1
# Equipment Units Owned/ Van 9-15	26	1082	1086	A/N	5	XOWNV9
# Equipment Units Owned/ Limo 1-8	26	1087	1091	A/N	5	XOWLI
# Equipment Units Owned/ Limo 9-15	26	1092	1096	A/N	5	XOWL9
# Equipment Units Owned/ Limo 16+	26	1097	1101	A/N	5	XOWL16
# Equipment Units Term Leased/ Trucks	26	1102	1106	A/N	5	XLEATK
# Equipment Units Term Leased/ Tractors	26	1107	1111	A/N	5	XLEATS
# Equipment Units Term Leased/ Trailers	26	1112	1116	A/N	5	XLEATL
# Equipment Units Term Leased/ HAZ-MAT Tank	26	1117	1121	A/N	5	XLEAHK
Truck					_	
# Equipment Units Term Leased/ HAZ-MAT Tank	26	1122	1126	A/N	5	XLEAHT
Trailer # Equipment Units Term Leased/ Motor Coach	26	1127	1131	A/N	5	XLEAMC
# Equipment Units Term Leased/ School Bus 1-8	26	1132	1136	A/N	5	XLEB1
# Equipment Units Term Leased/ School Bus 9-15	26	1137	1141	A/N	5	XLEB9
# Equipment Units Term Leased/ School Bus 16+	26	1142	1146	A/N	5	XLEB16
# Equipment Units Term Leased/ Mini Bus	26	1147	1151	A/N	5	XLEAMB
# Equipment Units Term Leased/ Van 1-8	26	1152	1156	A/N	5	XLEAV1
# Equipment Units Term Leased/ Van 9-16	26	1157	1161	A/N	5	XLEAV9
# Equipment Units Term Leased/ Limo 1-8	26	1162	1166	A/N	5	XLEL1
# Equipment Units Term Leased/ Limo 9-15	26	1167	1171	A/N	5	XLEL9
# Equipment Units Term Leased/ Limo 16+	26	1172	1176	A/N	5	XLEL16
# Equipment Units Trip Leased/ Trucks	26	1177	1181	A/N	5	XTRLTK
# Equipment Units Trip Leased/ Tractors	26	1182	1186	A/N	5	XTRLTS
# Equipment Units Trip Leased/ Trailers	26	1187	1191	A/N	5	XTRLTL
# Equipment Units Trip Leased/ HAZ-MAT Tank	26	1192	1196	A/N	5	XTRLHK
Truck						
# Equipment Units Trip Leased/ HAZ-MAT Tank Trailer	26	1197	1201	A/N	5	XTRLHT
# Equipment Units Trip Leased/ Motor Coach	26	1202	1206	A/N	5	XTRLMC
# Equipment Units Trip Leased/ School Bus 1-8	26	1207	1211	A/N	5	XTLS1
# Equipment Units Trip Leased/ School Bus 9-15	26	1212	1216	A/N	5	XTLS9
# Equipment Units Trip Leased/ School Bus 16+	26	1217	1221	A/N	5	XTLS16
# Equipment Units Trip Leased/ Mini Bus	26	1222	1226	A/N	5	XTRLMB
# Equipment Units Trip Leased/ Van 1-8	26	1227	1231	A/N	5	XTLV1
# Equipment Units Trip Leased/ Van 9-15	26	1232	1236	A/N	5	XTLV9
# Equipment Units Trip Leased/ Limo 1-8	26	1237	1241	A/N	5	XTLL1
# Equipment Units Trip Leased/ Limo 9-15	26	1242	1246	A/N	5	XTLL9
# Equipment Units Trip Leased/ Limo 16+	26	1247	1251	A/N	5	XTLL16
# Drivers Interstate/ Within 100 Miles	27	1252	1256	N	5	XDINT1
# Drivers Intrastate/ Within 100 Miles	27	1257	1261	N	5	XDTRA1
# Drivers/Grand Total (Interstate and Intrastate)	27	1262	1266	N	5	XDGTOT
# Drivers/Total with Commercial Drivers License	27	1267	1271	N	5	XDRCDL
# Drivers Interstate/ Beyond 100 Miles	27	1272	1276	N	5	XDINTB
# Drivers Intrastate/ Beyond 100 Miles	27	1277	1281	N	5	XDTRAB

	MCS-150	Colu	mns			PRISM
MCS-150 Data Elements	Field	Start	End	Type	Length	CODE
USDOT Revoked Flag	28	1282	1282	A/N	1	XDOTRF
USDOT Revoked Number	28	1283	1294	N	12	XDOTRN
Company Representative 1	29	1295	1414	A/N	120	XCREP1
Company Representative 2	29	1415	1534	A/N	120	XCREP2

Note: On the downloaded MCS-150 file, fields expected to contain a numeric value are padded with leading zeros to insure all bytes contain a numeric value. When there is no entry, then all bytes are padded with zeros. PRISM recommends that when printing the MCS-150 forms, numeric fields containing all zeros be left blank and that for fields containing a value, the leading zeros not be printed. This note applies to the following MCS-150 Fields in the above table: 16 (USDOT Number), 17 (ICC Docket Number), 18 (Dun & Bradstreet Number, 26 (# Equipment Units ...), 27 (# Drivers ...), and 28 (USDOT Revoked Number only). The MCS-150 Fields correspond to the numbered items on the MCS-150 form revised 6/12/2007.

4.8. T0041P PRISM Targeted Vehicle Output Transaction

This transaction supplements the SAFER XML Interface outlined in the SAFER 8.1 Interface Control Document. It is provided so that State systems can obtain the vehicle portion of the PRISM Local Target file in XML format to help satisfy several PRISM program requirements. The Carrier records contained in the PRISM Local Target file are specified as a separate transaction (T0042P). However, the MCSIP Step of the carrier responsible for safety of the vehicle, at the time of file generation, has been added as an additional field in the targeted vehicle record format.

Details on this transaction can be found in Appendix G - PRISM XML Transaction Specifications. <u>Table</u> 4.8 specifies the information provided.

Table 4.8 – T0041P: PRISM Targeted Vehicle

Description		XML Tag
Vehicle Identification Number (VIN)	Mandatory	VIN
License Plate Number	Mandatory	LICENSE_PLATE_NUMBER
License Plate Base Jurisdiction (State/Province)	Mandatory	REGISTRATION_JURISDICTION
Vehicle Registration Start Date	Optional	REGISTRATION_START_DATE
Vehicle Registration Expiration Date	Mandatory	REGISTRATION_EXPIRE_DATE
Make	Mandatory	MAKE
Model Year	Mandatory	MODEL_YEAR
Date of last vehicle update – CVIEW IRP Vehicle	Mandatory	CVISN_LAST_UPDATE_DATE
Or Date of PRISM Vehicle File extract		Or PVF_VEHICLE_FILE_CREATE_DATE
by the State		
Safety USDOT Number	Mandatory	SAFETY_CARRIER
MCSIP Step of Safety Carrier	Mandatory	MCSIP_STEP
Date of Last MCMIS Update to SAFER – CVIEW IRP Vehicle	Optional	LAST_CENSUS_UPDATE_DATE

4.9. T0042P PRISM Targeted Carrier Output Transaction

This transaction supplements the SAFER XML Interface outlined in the SAFER 8.1 Interface Control Document. It is provided so that State systems can obtain the Carrier portion of the PRISM Local Target file in XML format to help satisfy several PRISM program requirements. The Vehicle records contained in the PRISM Local Target file are specified as a separate transaction (T0041P).

Details on this transaction can be found in Appendix G - PRISM XML Transaction Specifications. <u>Table</u> 4.9 specifies the information provided.

Table 4.9 – T0042P: PRISM Targeted Carrier

Description		XML Tag
USDOT Number	Mandatory	CARRIER_ID_NUMBER
Carrier Legal Name	Mandatory	CARRIER_NAME
Carrier "Doing Business As" Name	Optional	DBA_NAME
Physical Address Street	Mandatory	STREET
Physical Address City	Mandatory	CITY
Physical Address State Code	Mandatory	STATE
Physical Address Zip Code	Mandatory	ZIP_CODE
MCSIP Step	Mandatory	MCSIP_LEVEL
MCSIP Step Date	Mandatory	MCSIP_LEVEL_DATE
SAFESTAT Indicator	Optional	SAFESTAT_INDICATOR
SAFESTAT Date	Optional	SAFESTAT_DATE
MCMIS Last Update Date	Mandatory	LAST_UPDATE_DATE
MCMIS Last Update User ID	Mandatory	LAST_UPDATE_USERID

5. INTRODUCTION TO PROCESS SPECIFICATIONS

5.1. Process Introduction

This Section describes all of the processing involved in implementing the PRISM Program. The processing is described at a logical level that is independent of the physical implementation. The description provides a common set of rules, but allows the individual parties to select their own database design and communication interfaces.

5.1.1. Process Implementation Charts

A Process Implementation Chart (PIC) is included in Chapter 6 for each major business requirement. The PIC is a graphical logical representation of a process. The chart shows what occurs within a process. The PIC also documents the processors (participants or organizational units) involved. These processors are listed across the top of the chart as column headings. A processor's responsibilities are contained within its column(s). Arrows represent the flow of information.

The following icons are used in the Process Implementation Charts that follow:

• Rectangle Process

• Barrel Automated file or database

5.1.2. Process Specifications

The process specifications describe the rules that must be followed by each of the parties involved in the system.

When appropriate, the process specifications describe messages using a three character code for Nlets messages, which is referred to as the message type. These codes are unique for a given message type within an application, and may be used to reference the appendices that describe the communication interfaces to be used by Law enforcement agencies using the Nlets message formats.

Nlets users should follow the rules in the specifications for the Nlets processes, and then reference Appendix A, Nlets Message Formats.

Data elements listed in the process specifications reference the data dictionary using a six-character code. The data dictionary describes the fields used in the system. The data dictionary is contained in Appendix C.

The process specifications describe the validation rules and the error messages to be used. A list of error messages is provided in Appendix E. In situations where a message contains multiple records and only some of the records are in error, processing should continue on the correct records.

5.1.3. Processing Summary

The remainder of this section provides a *summary* of PRISM processing. The processing is described in full detail in the process specifications to follow. For information on PRISM files and data maintenance requirements, see Section 4, Data Description.

5.1.3.1. Local PRISM CENSUS FILE

Initial or Refresh Local PRISM Census File

- Contact PRISMTechnicalSupport@Dot.Gov to receive the initial (or refresh) PRISM Census File.
- The file can be downloaded from the Volpe SFTP Site.

Daily Updates to PRISM Census File

FMCSA Daily and Weekly Updates to MCMIS Database

- FMCSA will send daily and weekly updates to the MCMIS Database to SAFER. The daily updates are scheduled to be sent to SAFER each evening. The weekly updates are scheduled to be sent on Saturday.
- SAFER will pick up the daily and weekly MCMIS Database Updates and update the SAFER-PRISM database.
- Note that the daily updates will include all new records and any changes that have occurred to
 carrier census fields of existing records since the last MCMIS Extract was generated. On
 Saturdays MCMIS will be providing carrier maintenance updates to SAFER plus updates to all
 statistical fields used by SAFETYNET (i.e., number of fatal accidents in the last 15 days, number
 of tow away accidents in the last 24 days for each carrier) and as necessary the updates that result
 from a monthly SafeStat monitor run.

PRISM Central Site Daily Updates of PRISM Census File

- The PRISM Central Site will place the daily updates to the Local PRISM Census File on the Volpe SFTP Site of PRISM States not later than 6.00am (ET) each business day (Monday Friday).
- If the PRISM Central Site cannot place the daily updates on the Volpe SFTP Site on a business day, it shall recycle to place the daily updates on the Volpe SFTP Site by the next business day at 6:00am (ET) and continue recycling until the file is sent. If the PRISM Central Site cannot send the daily updates to the Local PRISM Census File, no Local PRISM Carrier File will be sent.

PRISM State Processing of Daily Updates of Local PRISM Census File

- PRISM States will pick up daily updates of the Local PRISM Census File from the Volpe SFTP Site after 6:00am (ET) each business day (Monday Friday)..
- If no daily update file is available on the Volpe SFTP Site PRISM States should recycle to the next business day and continue checking each day until the Local PRISM Census File Updates are received.
- PRISM States should apply the daily updates to their Local PRISM Census File.

5.1.3.2. Local PRISM CARRIER FILE

PRISM Central Site creates Local PRISM Carrier File

- The PRISM Central Site shall extract from the SAFER-PRISM database, the Carrier record of all carriers in MCSIP and create the PRISM Carrier File.
- The PRISM Central Site shall place the Local PRISM Carrier File on the Volpe SFTP Site not later than 6:00am (ET) each Monday Friday. Note that in the event that no daily updates to the Local PRISM Census File are sent, there will not be a Local PRISM Carrier File sent.
- If the PRISM Central Site cannot place the Local PRISM Carrier File on the Volpe SFTP Site by 6:00am (ET) on a business day it shall automatically recycle to send it by 6:00am (ET) on the next business day and continue recycling until the Local PRISM Carrier File is placed on the Volpe SFTP Site.

PRISM State Processing of Local PRISM Carrier File

- PRISM States shall retrieve the Local PRISM Carrier File each Monday Friday after 6:00am (ET) from the Volpe SFTP Site.
- If the Local PRISM Carrier File is not available, the retrieval should be recycled to the next business day and continue being recycled until the Local PRISM Carrier File is received.

5.1.3.3. PRISM VEHICLE FILE

- Each PRISM State that has opted to use this alternative must process the Local PRISM Carrier
 File against their State IRP Registration files and extract the *most current vehicle registration*record for each vehicle assigned to a motor carrier in MCSIP. No vehicle with expired
 registration should be selected. Suspended vehicles should be included.
- Processing of TEMP Plates: The Plate Number field is a required field and cannot be blank. For TEMP plates, the Plate Number field can be populated with "TEMPnnnnnn" or similar designator as decided by the State. The State is responsible to ensure that only valid, non-duplicated numbers are used.
- PRISM States send the PRISM Vehicle file to the Volpe SFTP Site by Midnight (ET).

5.1.3.4. IRP Registration Input, Transaction T0022V3

- CVISN/PRISM States use this XML transaction to satisfy the PRISM requirement for providing vehicle data.
- To use this transaction and satisfy PRISM requirements, States must report to SAFER on a daily
 basis all of the IRP vehicle transactions maintained by the State and all subsequent updates made
 throughout the year. States must also maintain the IRP Status Code field. (See Appendix F, IRP
 Vehicle Status Codes, for a list and description of the codes.) The vehicle registration data
 provided must identify the USDOT Number of the motor carrier responsible for the vehicle's
 safety.
- A PRISM Central Site process automatically targets each vehicle assigned to a motor carrier in MCSIP.

5.1.3.5. SAFER-PRISM Database Updates

• The PRISM Central Site shall retrieve all State PRISM Vehicle files and the Compliance Review Vehicle List file after Midnight (ET) each night and will update the SAFER-PRISM Database.

- If a State's Vehicle file is not on the Volpe SFTP Site by Midnight (ET) the PRISM Central Site will proceed with the most recent vehicle file that it has for that State.
- If the PRISM Central Site finds two PRISM Vehicle Files from any State (i.e., the State was late sending one file and the next scheduled file is also present) the PRISM Central Site should only process the most recent file.

5.1.3.6. LOCAL PRISM TARGET FILE

- After completing the SAFER-PRISM Database update process, the PRISM Central Site extracts the Local PRISM Target File from the SAFER-PRISM Database and places it on the Volpe SFTP Site by 6:00am (ET). The Target File contains the vehicles from the PRISM Vehicle Files sent by States and the vehicles automatically targeted uploaded from CVISN/PRISM States.
- PRISM States pick up the Local PRISM Target File from the Volpe SFTP Site after 6:00am (ET) each business day and perform their local processing.

5.1.3.7. MCMIS Safety and Census Update, Transaction T0031

CVISN/PRISM states can use this XML transaction from the SAFER FTP site to satisfy the PRISM requirement for Census and Carrier data file updates.

PRISM Central Site Provides Carrier Census Update

• If a PRISM State has chosen to receive carrier census updates via the T0031 XML transaction, the PRISM Central Site will extract the data from the SAFER-PRISM Database and place the transaction on the SAFER FTP site.

PRISM State Processing of Carrier Census Subscriptions

• The PRISM State shall retrieve the MCMIS Safety and Census Update, T0031 from the SAFER FTP Site and perform additional processing, as required.

5.1.3.8. PRISM/XML Targeted Vehicle & Carrier Output Transactions

• These transactions are provided so that State systems can obtain the vehicle or carrier portion of the Local PRISM Target file in XML format. The T0041P transaction specifies the targeted vehicles. The T0042P transaction specifies the targeted carriers. These output transaction files are available in the same time frame as the Local PRISM Target file and are available on both the VOLPE SFTP Site and SAFER FTP Server by 6:00am (ET) each business day.

PRISM Central Site PRISM/XML Targeted Vehicle Transaction (T0041P)

 The T0041P transaction is similar to the existing IRP XML transaction (T0028) used in the CVISN Program, but it only contains targeted vehicle information required for the PRISM Program. The T0041P should not be used for CVISN purposes, which require registration data from the T0028, and conversely the T0028 should not be used for targeted vehicle determination purposes.

PRISM State Processing of PRISM/XML Targeted Vehicle File

• The PRISM State shall retrieve the PRISM/XML Targeted Vehicle File (T0041P) from the appropriate Volpe Site and perform its processing. This information should be placed in a separate table from the CVISN IRP vehicle registration information if stored in the same database

with the CVISN data, such as in a State CVIEW. Modifications would have to be made to the State's CVIEW database to accommodate the T0041P.

5.1.3.9. PRISM State File Initial Load Processes

When a State first joins PRISM and has chosen to use PRISM files, it initially loads PRISM files as follows. It:

- Receives and loads a full copy of the PRISM Census File from the Volpe SFTP Site
- Receives and loads a full copy of the PRISM Carrier File from the Volpe SFTP Site
- Retrieves targeted (i.e., assigned to a MCSIP carrier) vehicles from its registration files and sends them to the Volpe SFTP Site for inclusion in the PRISM Central Site PRISM Target File
- If the State has chosen to retain a local PRISM Target File it would download the file from the Volpe SFTP Site after the PRISM Central Site has incorporated targeted vehicle records from all participating PRISM States

If a State chooses to use CVIEW to satisfy PRISM Requirements, it initially loads CVIEW files as follows.

• It receives and loads a full copy of the Carrier and Vehicle database from SAFER. Please refer to http://cvisn.fmcsa.dot.gov/default.aspx?PageID=safer for additional information.

5.1.3.10.PRISM State File Maintenance Processes

After a State has joined PRISM and initialized its local files, it must update them when changes occur. It must also provide vehicle updates for the PRISM Central Site to maintain the PRISM Target File.

There are several events that trigger PRISM file updates:

- FMCSA sends daily updates of the Motor Carrier Management Information System (MCMIS)
 Census Database to SAFER, which in turn updates the SAFER-PRISM database. The PRISM
 Central Site sends daily updates for the Local PRISM Census File and the full Local PRISM
 Carrier File daily to PRISM States. SAFER also sends daily updates to CVISN States via XML
 transactions and the Volpe FTP server. These may include:
 - New carriers
 - Carriers added to MCSIP
 - Carriers removed from MCSIP
 - Changes to carrier census and safety information
- In a State using PRISM Files:
 - A vehicle is assigned for safety purposes to or leaves (i.e., is no longer assigned to) a MCSIP carrier based in a PRISM State.
 - A State renews the registration of a vehicle assigned to a MCSIP carrier or changes other PRISM Vehicle File information on the vehicle
- In a State using CVIEW Files:
 - Any addition, change (including renewals), or deletion in an IRP vehicle registration triggers an update to SAFER

The update processes are described in the following sub-sections:

5.1.3.11.FMCSA Sends MCMIS Database Updates

When FMCSA sends daily updates of the MCMIS Database to SAFER, SAFER updates the SAFER-PRISM database. The PRISM Central Site sends daily updates to the Volpe SFTP Site for authorized States to download the updates to the Local PRISM Census File and the full Local PRISM Carrier File.

For those PRISM States that have chosen to retain a Local PRISM Target File, the PRISM Central Site places the Local PRISM Target File on the Volpe SFTP Site after it has applied vehicle updates to it from all participating PRISM States.

5.1.3.12. Vehicle Assigned to or Leaves MCSIP Carrier or Vehicle Information Changes

When a vehicle is assigned for safety purposes to a MCSIP carrier based in a PRISM State, the State retrieves PRISM Vehicle File information from its registration files and sends it to the Volpe SFTP Site as part of the nightly PRISM Vehicle File transfer. Note that PRISM States who are also CVISN States and report all IRP vehicle registration changes daily to SAFER via CVIEW do not have to provide a separate PRISM Vehicle File. SAFER will properly update the SAFER-PRISM database to ensure that all targeted vehicles are properly identified.

When a vehicle assigned for safety purposes to a MCSIP motor carrier leaves (i.e., is no longer assigned to) the carrier, the vehicle information will not be included in the PRISM Vehicle File. When the nightly PRISM Vehicle File transfer extracts vehicle information and forwards it to the Volpe SFTP Site, this vehicle will not be included as a targeted vehicle, and the PRISM Central Site will update the SAFER-PRISM database accordingly.

When PRISM Vehicle File information for a vehicle assigned to a MCSIP motor carrier changes (e.g., the registration is renewed), the PRISM State again forwards the vehicle information changes to the Volpe SFTP Site as part of the nightly PRISM Vehicle File transfer. PRISM States using CVIEW must report all vehicle or registration changes daily to SAFER to satisfy this requirement.

In all of the above cases, the PRISM Central Site updates the SAFER-PRISM database with these changes, and places the Local PRISM Target File (including all updates) on the Volpe SFTP Site for downloading by all participating States that have chosen to retain a copy locally. SAFER will update the SAFER-PRISM database with all changes and when the PRISM Central Site extracts the Local PRISM Target File, or the T0041P, all changes will be included.

5.1.3.13.State Registration Inquiry Processes

States need to provide the ability to query registration files by USDOT Number of the registrant and motor carrier responsible for safety in order to obtain registration records details. FMCSA recommends the inquiry allow for access by USDOT to both the registrant information and the vehicle information in the same listing. The inquiry response should result in both registrant and vehicles associated with the USDOT Number being displayed and marked accordingly. This information is used for checks described below.

When doing status checks, PRISM States retaining a copy of the Local PRISM Target File will most likely perform inquiries against it rather than the SAFER-PRISM Database. Since PRISM States may maintain a Local PRISM Census File, inquiries will be made against it rather than the SAFER-PRISM Database. The design of inquiries to local files is outside the scope of this document.

Before registering a vehicle, PRISM States must determine if the carrier to which the vehicle is assigned is in MCSIP. There are several ways to perform this inquiry:

- Process 6.3.1 Check Carrier Safety Status using CVIEW database
- Process 6.3.2 Check Carrier Safety Status using Local PRISM Target File
- Process 6.3.3 Check Carrier Safety Status using Web Service

In addition, each vehicle must be checked to determine if the vehicle is assigned for safety to a MCSIP carrier who is "out-of-service". The above processes can also be used for the vehicle status check.

States are cautioned that just because a carrier is in MCSIP does not mean that the registrations of vehicles assigned to that carrier for safety should not be renewed. The MCSIP Step Table in Appendix B clearly indicates specific MCSIP Steps where registration should or should not be renewed.

5.1.3.14.Law Enforcement (Nlets) Inquiry Processes

Law enforcement users of the Nlets network can query the PRISM Central Site Target File using:

- Section 6.4.2 Nlets Carrier Inquiry
- Section 6.4.3 Nlets Vehicle Inquiry

5.1.3.15. Validating PRISM Data Records received from or sent to the Volpe SFTP Site

Table 5.1 consolidates all of the detailed editing requirements of the processes contained in Section 6. In the past, each process had one or more edits that were required to be performed and those edits were included in the specifications for that process. Now all editing required of any process is identified in the table below. Whether a data element is required or optional is contained in the data layouts in Section 4. Note that each edit is identified in the first column of the chart below with its associated Error or Warning Message Number.

Table 5.1 – PRISM Process Validation Edits

Validation Item and related	Initialize	Daily Local PRISM			
Error/Warning	Local PRISM	Census	Local PRISM	Local PRISM	PRISM Vehicle
Message Nbr.	Census File	Updates File	Carrier File	Target File	File
Verify File can	Y	Y	Y	Y	N
be loaded					
Validate Each	Y	Y	Y	Y	Y
Data Element in					
Each Record.					
Error 200 and/or					
201 Applicable					
If TIN is present	Y	Y	Y	N	N
(MMCTIN) > 0,					
TIN Type					
(MMCTTY)					
must be present.					
Add record but					
produce					
Warning					
Message 614					
If MCSIP Flag	N	N	Y	Y	N
not = "C" do not					
add record and					
use Error 210					

Validation Item		Daily Local			
and related	Initialize	PRISM	I I DDIGI	I I DDIGI	DD TOLET LA L
Error/Warning	Local PRISM	Census	Local PRISM	Local PRISM	PRISM Vehicle
Message Nbr.	Census File	Updates File	Carrier File	Target File	File
If Carrier Status	N	Y	N	N	N
(MMCSTS) not					
= "A", or not =					
"I" where					
MCSIP Step					
(MSFSTP) = 52					
to 55, 57, or 60					
to 68 (Out of					
Service Steps),					
MCSIP Step					
(MSFSTP) must					
be "00" or "99"					
Error 203					
If MCSIP Step =	N	Y	N	N	N
"99" Carrier					
Status cannot =					
"A". Error204					
Carrier Target	N	N	Y	Y	N
Indicator					
(MRFCTH)					
must = "T".					
Error 210/218					
Vehicle Target	N	N	N	Y	N
Indicator	-,	- 1	-1	-	1,
(MRFVTH)					
must = "T".					
Error217					
Vehicle Record	N	N	N	Y	Y
USDOT Number	14	14	14		•
(MMCDO1)					
must be on					
Carrier File.					
Error 206					
E1101 200					

6. PRISM REQUIREMENTS AND PROCESS SPECIFICATIONS

6.1. Requirement: Validate USDOT Number

A system related PRISM Requirement is to validate each USDOT Number before the Number is added to a State IRP Registration File. This needs to be done for both the registrant and the motor carrier responsible for safety. There are several alternatives that may be used to satisfy this requirement. Validation of the USDOT Number requires that the USDOT Number and Taxpayer Identification Number (i.e., TIN) be entered as a search argument to one of the recommended databases. If a match occurs on the USDOT Number and the TIN of the database record is equal to the TIN of the search argument, a match has occurred. This process is performed automatically and the operator notified if the USDOT Number has not validated. In this case, the input TIN as well as the TIN from the validation file should be displayed to assist the operator to be able to fix the incorrect TIN. If validating with any process other than the MCMIS Database and a no-hit occurs (i.e., the search argument does not find a match on USDOT Number), then an inquiry must be made to the FMCSA MCMIS Database. In the event of a no-hit on the MCMIS inquiry an investigation must be made to determine why the USDOT isn't on MCMIS. Note: This process also applies when granting temporary registration.

When the validation of the USDOT Number returns a match, a message "needing operator intervention" should be returned for the following conditions, the USDOT Number is found but it is <u>inactive</u>, the USDOT Number is found but it is <u>inactive</u>, the USDOT Number is found but the entity type is "<u>registrant only</u>," and the number is listed at the IRP vehicle level. If it is <u>inactive</u>, FMCSA should be contacted before making the number active again. If it is <u>intrastate</u> only, the application should be rejected until the carrier changes the number to be for interstate operations too. If it is "<u>registrant only</u>," and the number is listed at the IRP vehicle level, the registrant should be informed that they either obtain their own authority or they acquire a lease to a motor carrier with authority.

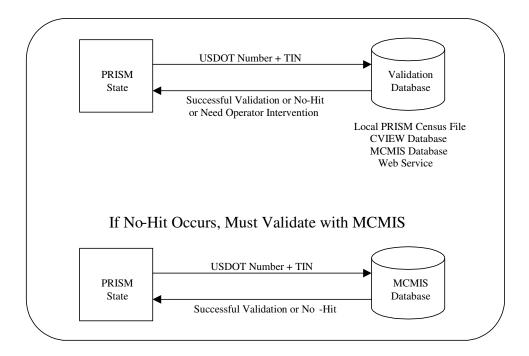


Figure 6.1 – USDOT Number Validation

6.1.1. Utilize Local PRISM Census File as Validation Database

6.1.1.1. Initialize or Refresh Local PRISM Census File

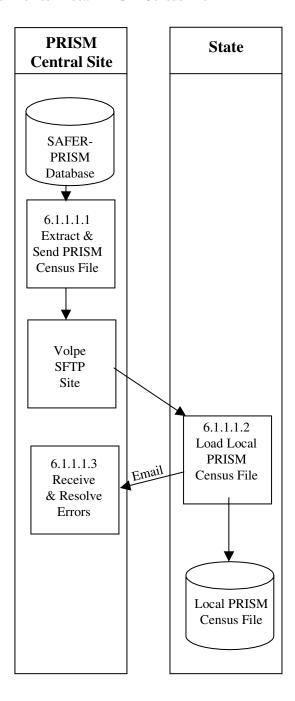


Figure 6.2 – Local PRISM Census File Generation

BUSINESS PROCESS

The purpose of this process is to initialize the PRISM Census File at participating PRISM States, from the PRISM Census File received from the Volpe SFTP Site.

The PRISM Central Site utilizes the SAFER-PRISM database that supports all SAFER and PRISM functions. The PRISM Central Site generates the PRISM Census File as required and places it on the Volpe SFTP Site for PRISM States to download.

This process is performed when a new State begins PRISM production, whenever that State determines that it must refresh its copy of the PRISM Census File, or whenever the PRISM Central Site determines that it must refresh its copy of the PRISM Census File on the Volpe SFTP Site.

The PRISM Census File is a subset of the FMCSA MCMIS Database. It contains a copy of every record on the FMCSA MCMIS Database, but each record contains a smaller set of data.

The PRISM Central Site will place the current copy of the Local PRISM Census File on the Volpe SFTP Site.

When the initial load of the PRISM Census File is received from the Volpe SFTP Site each receiving entity should load it onto its computer.

6.1.1.1.1. Extract and Send PRISM Census File

6.1.1.1.1. Timing

This process is performed when a new State joins PRISM, on request of the PRISM Central Site, or as required by the PRISM State.

6.1.1.1.1.2. Processor: PRISM Central Site

6.1.1.1.3. Selection

Extract one PRISM Census File record for every motor carrier in the SAFER -PRISM Database. Note: This includes both interstate and intrastate carriers and active or inactive (MMCSTS) carriers.

6.1.1.1.1.4. Update: Load the PRISM Census File on the Volpe SFTP Site.

6.1.1.1.1.5. Validation: None.

6.1.1.1.6. Transmission: None

6.1.1.1.2. Load Local PRISM Census File

6.1.1.1.2.1. Timing

This process is performed within 24 hours of receiving the PRISM Census File from the Volpe SFTP Site.

6.1.1.1.2.2. Processor: PRISM State

6.1.1.1.2.3. Retrieval: Retrieve the PRISM Census File from the Volpe SFTP Site.

6.1.1.1.2.4. Selection

Extract one PRISM Census File record for every motor carrier in the PRISM Census File. See the PRISM Census File record layout in Chapter 4.

- **6.1.1.1.2.5.** Validation: Standard for Local PRISM Census File (See Section 5.1.3.6).
- **6.1.1.1.2.6. Retrieval:** Retrieve the PRISM Census File from the Volpe SFTP Site.

6.1.1.1.2.7. Selection

Extract one PRISM Census File record for every motor carrier in the PRISM Census File. See the PRISM Census File record layout in Chapter 4.

6.1.1.1.2.8. Validation: Standard for Local PRISM Census File (See Section 5.1.3.6).

6.1.1.1.2.9. Error Processing

Report all records that fail the above validations to the PRISM Central Site. A printed report should always be produced. Report one or two errors or warnings by telephone. Send the printed report by email (PRISMTechnicalSupport@Dot.Gov) if requested by the PRISM Central Site. The printed report format is shown below. For each USDOT Number, list all error and warning messages. Multiple messages may be placed on the report for a single record.

Local PRISM Census File Error and Warning Report

USDOT Number: nnnnnnn

6.1.1.1.2.10. Update: Load the new copy of the Local PRISM Census File, replacing the existing one.

6.1.1.1.3. Receive and Resolve Errors

6.1.1.3.1. Timing: This process is performed within 24 hours of receiving notification of errors.

6.1.1.1.3.2. Processor: PRISM Central Site

6.1.1.1.3.3. Retrieval

Receive either a physical copy of the Error Report(s) produced in Section 6.1.1.1.2.6 or the error information via telephone.

6.1.1.1.3.4. Error Evaluation

Evaluate the number and type(s) of errors. Coordinate corrective actions with the affected parties.

6.1.1.2. Maintain Local PRISM Census File

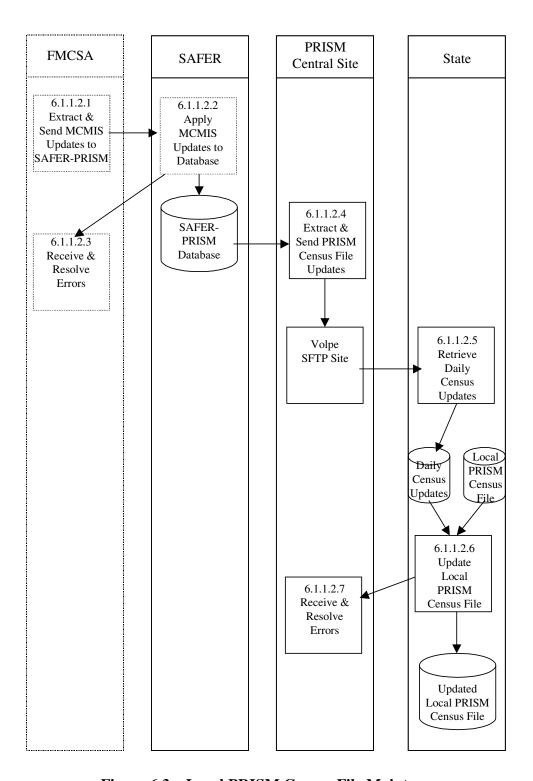


Figure 6.3 – Local PRISM Census File Maintenance

BUSINESS PROCESS

The purpose of this process is to maintain the Local PRISM Census File with updates received from the Volpe SFTP Site.

This process is performed by SAFER and the PRISM Central Site and all participating States on a daily

SAFER receives updates to the MCMIS Database from FMCSA/Volpe on a daily basis. Updates may include adding new motor carriers, adding carriers to MCSIP, removing them from MCSIP, or changing other carrier data.

SAFER updates the SAFER-PRISM database. The PRISM Central Site extracts the Daily Local PRISM Census Updates File and places the file on the Volpe SFTP Site for PRISM States to download.

Each PRISM State then applies the updates to their Local PRISM Census File.

6.1.1.2.1. Extract and Send MCMIS Database Updates

This process is scheduled to be performed each evening (Monday –Friday). The processing associated with this process is beyond the scope of this document.

FMCSA will provide daily updates on certain Census fields (see Section 5.1.3.1) and will accumulate all changes made to the MCMIS Database during the week.

6.1.1.2.1.1. Timing: This process is performed daily.

6.1.1.2.1.2. Processor: FMCSA/Volpe

6.1.1.2.2. Apply MCMIS Updates to SAFER-PRISM Database

6.1.1.2.2.1. Timing: This process is scheduled each day (Monday – Friday).

6.1.1.2.2.2. Processor: SAFER

6.1.1.2.2.3. Selection

Read each FMCSA MCMIS Database Update record. Access the SAFER-PRISM database using the USDOT Number (MMCDO1) from the update record.

- If a match is found, replace the existing SAFER-PRISM database record with the update record.
- If no match is found, add the update record to the SAFER-PRISM database

In addition to the above processing to update the SAFER-PRISM database, SAFER will also examine the update record from a PRISM perspective as follows:

- Compare each field in the two records. If any values are different *other than* MCMIS Last Update Date (MRFMLU), MCMIS Last Update User ID (MRFMUS), or MCMIS File Create Date (MRFMCD), select the record for later processing by the PRISM Central Site.²
- If a match was not found, select the record for later processing by the PRISM Central Site.

Errors: Any error discovered when processing the Weekly MCMIS Database Updates must be reported to FMCSA and resolved by FMCSA.

6.1.1.2.3. Receive & Resolve Errors

6.1.1.2.3.1. Timing

Errors in the FMCSA MCMIS database should be corrected as soon as possible and included in the next Update.

6.1.1.2.3.2. Processor: FMCSA

6.1.1.2.4. Extract & Send Local PRISM Census File Updates

6.1.1.2.4.1. Timing: This process must be completed by 6:00am (ET) daily (Monday – Friday).

6.1.1.2.4.2. Processor: PRISM Central Site

6.1.1.2.4.3. Selection

The PRISM Central Site will generate the Local PRISM Census File Daily Updates from those records generated during the MCMIS Updates.

6.1.1.2.4.4. Validation: None.

6.1.1.2.4.5. Update

Write the selected records to the Local PRISM Census Updates File. Note that each record written must have a record terminator (i.e., carriage return and line feed). MCMIS Database fields equate directly to PRISM Census File fields except for those shown in Table 6.1below:

² When fields outside the PRISM View of the MCMIS Census File change, the MCMIS Date of Last Update will change although no PRISM data has changed. SAFER will not select these records.

Table 6.1 – MCMIS Database / PRISM Census File Data Field Differences

MCMIS Database	PRISM Census File
Office Telephone Area Code + Office Telephone	Office Telephone Number (MMCPHN)
Number	
Date Added/Century + Date Added/Year + Date	Date Added (USDOT Issue Date) (MMCDDT)
Added/Month + Date Added/Day	
Date Last Changed/Century + Date Last	MCMIS Last Update Date (MRFMLU)
Changed/Year + Date Last Changed/Month + Date	
Last Changed/Day	
File Generation Date/Century + File Generation	MCMIS File Create Date (MRFMCD)
Date/Year + File Generation Date/Month + File	
Generation Date/Day	

6.1.1.2.4.6. Transmission

Write the Daily PRISM Census Update File records to the Volpe SFTP Site.

6.1.1.2.4.7. Error Processing

Report all records that fail the validations to FMCSA. A printed report should always be produced. Report one or two errors or warnings by telephone. Send the printed report if requested by FMCSA. The printed report format is shown below. For each USDOT Number, list all error and warning messages. Multiple messages may be placed on the report for a single record.

Local PRISM Census File Error and Warning Report

USDOT Number:	nnnnnn
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
USDOT Number:	nnnnnn
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
Message: Message:	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

6.1.1.2.5. Retrieve Weekly Census Updates

6.1.1.2.5.1. Timing

This process is performed after 6:00am (ET) each day (Monday – Friday).

6.1.1.2.5.2. Processor: PRISM State

6.1.1.2.5.3. Retrieval

Retrieve the Daily Local PRISM Census Updates File Updates from the Volpe SFTP Site and load file on the State System for further processing.

6.1.1.2.6. Update Local Prism Census File

6.1.1.2.6.1. Timing

This process is performed after 6:00am (ET) each day (Monday – Friday).

6.1.1.2.6.2. Processor: PRISM State

6.1.1.2.6.3. Validation: Optional

6.1.1.2.6.4. Error Processing

If validation is used and errors are found, report all records that fail the validations to the PRISM Central Site. A printed report should always be produced. Report one or two errors or warnings by telephone. Send the printed report (by email to PRISMTechnicalSupport@Dot.Gov) if requested by the PRISM Central Site. The printed report format is shown below. For each USDOT Number, list all error and warning messages. Multiple messages may be placed on the report for a single record.

Local PRISM Census File Error and Warning Report

USDOT Number:	nnnnnn
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
USDOT Number:	nnnnnn
USDOT Number: Message:	nnnnnn xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
0.00	
Message:	xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

6.1.1.2.6.5. Selection

Read each PRISM Census Updates File record. Access the Local PRISM Census File using the USDOT Number (MMCDO1). Table 6.2 specifies the processing action.

Table 6.2 – Local PRISM Census File Carrier Updates

Update Criteria	Update Action
Match on USDOT Number (MMCDO1)?	Update Local PRISM Census File?
YES	YES - REPLACE
NO	YES - ADD

- Row 1 A change has occurred to an existing carrier's Census information. The existing Local PRISM Census File record is replaced with the PRISM Census File Update record.
- Row 2 A new carrier has been issued a USDOT Number. The PRISM Census File Update record is added to the Local PRISM Census File.

6.1.1.2.7. Receive and Resolve Errors

6.1.1.2.7.1. Timing: This process is performed within 24 hours of receiving notification of errors.

6.1.1.2.7.2. Processor: PRISM Central Site

6.1.1.2.7.3. Retrieval

Receive either a physical copy of the Error and Warnings Report produced in Section 6.1.1.2.5.6 or the error information via telephone.

6.1.1.2.7.4. Error Evaluation

Evaluate the number and type(s) of errors and warnings. Coordinate corrective actions with the PRISM State, MCMIS, and/or SAFER.

6.1.2. Utilize CVIEW as Validation Database

6.1.2.1. Initialize or Refresh CVIEW

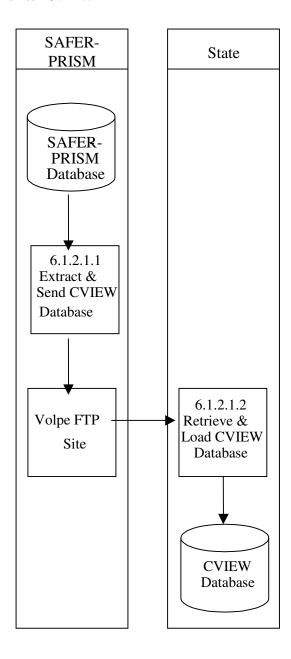


Figure 6.4 – CVIEW Database Creation

BUSINESS PROCESS

CVISN States that use CVIEW may be able to use their local CVIEW database to satisfy the PRISM requirement to validate USDOT Numbers. Their Local CVIEW must have the USDOT Number and the Taxpayer Identification Number (TIN) for **every motor carrier and registrant** to satisfy the PRISM Requirement. The State **must also be receiving Daily CVIEW Updates** containing the most recent motor carrier data from SAFER. It is expected that State IRP personnel would enter the applicant's USDOT Number and the TIN and the IRP system would provide verification that the two identifying numbers match for an acceptable validation. Validation should also consider cases where the USDOT number found is either inactive, intrastate only, or "registrant only" and the number is listed at the IRP vehicle level (see 6.1, 2nd paragraph).

FMCSA provides SAFER with Daily and Weekly Updates to the MCMIS Database. SAFER updates the SAFER-PRISM database and this provides data to support PRISM, CVIEW, ISS2, SafetyNet 2000 and other government programs.

For States that subscribe, SAFER provides Daily and Weekly Updates (i.e. carrier snapshot) to CVIEW for all motor carrier changes made during the previous week to the MCMIS Census File.

This document provides very limited information concerning CVIEW or other SAFER System capabilities. Interested persons should contact the SAFER Help Desk available by emailing FMCTechSup@Dot.Gov

6.1.2.1.1. Extract & Send CVIEW Database

6.1.2.1.1.1. Timing: According to the schedule developed by the State when entering CVIEW.

6.1.2.1.1.2. Processor: SAFER

6.1.2.1.1.3. Selection: SAFER will select each motor carrier record to prepare the Carrier Snapshot.

6.1.2.1.1.4. Validation: None

6.1.2.1.1.5. Update

SAFER will write the Carrier Snapshot to a file for transmission to the requesting State.

6.1.2.1.1.6. Transmission

Transmission can occur through an XML transaction file written to the Volpe SFTP Site.

6.1.2.1.2. Retrieve & Load CVIEW File

6.1.2.1.2.1. Timing: The file should be created as soon as all data is available.

6.1.2.1.2.2. Processor: PRISM State Using CVIEW

6.1.2.1.2.3. Selection

After the data has been run through the XML Processor, each record should be selected.

6.1.2.1.2.4. Update

Each record should be loaded into the CVIEW Processor. See CVIEW Systems Documentation for additional information.

6.1.2.2. Maintain CVIEW Database

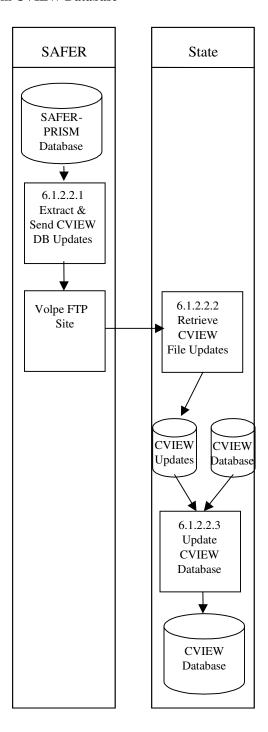


Figure 6.5 – CVIEW Database Maintenance

BUSINESS PROCESS

The PRISM State must receive Daily CVIEW Updates containing the most recent motor carrier data from SAFER and update their Local CVIEW in order to satisfy PRISM USDOT Number validation requirements. FMCSA provides SAFER with Daily and Weekly Updates to the MCMIS Census File. SAFER updates the SAFER-PRISM database and this provides data to support PRISM, CVIEW, ISS2, SafetyNet 2000 and other government programs. These updates are made available to CVISN States for updating their Local CVIEW.

This document provides very limited information concerning CVIEW or other SAFER System capabilities. Interested persons should contact the SAFER Help Desk by emailing FMCTechSup@Dot.Gov

6.1.2.2.1. Extract & Send CVIEW Database Updates

6.1.2.2.1.1. Timing: Each Day

6.1.2.2.1.2. Processor: SAFER

6.1.2.2.1.3. Selection

SAFER will select each changed motor carrier record to prepare the Carrier Snapshot.

6.1.2.2.1.4. Validation: None

6.1.2.2.1.5. Update

SAFER will write the Carrier Snapshot to a file for transmission to the requesting State.

6.1.2.2.1.6. Transmission

Transmission can occur through an XML transaction file written to the Volpe SFTP Site.

6.1.2.2.2. Retrieve CVIEW Database Updates

6.1.2.2.2.1. Timing: The file should be created as soon as all data is available.

6.1.2.2.2.2. Processor: PRISM State Using CVIEW

6.1.2.2.2.3. Selection

After the data has been run through the XML Processor, each record should be selected.

6.1.2.2.2.4. Update

Each record should be loaded into the CVIEW Processor. See CVIEW Systems Documentation for additional information.

6.1.2.2.3. Update CVIEW Database

6.1.2.2.3.1. Timing: The file should be created as soon as all data is available.

6.1.2.2.3.2. Processor: PRISM State Using CVIEW

6.1.2.2.3.3. Selection:

After the data has been run through the XML Processor, each record should be selected.

6.1.2.2.3.4. Update

Each record should be loaded into the CVIEW Processor. See CVIEW Systems Documentation for additional information.

6.1.3. MCMIS Database Query

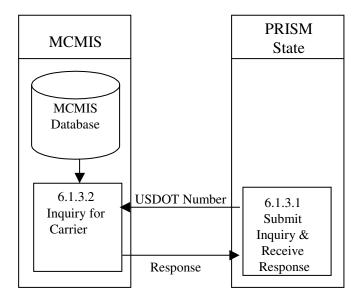


Figure 6.6 – MCMIS Database Inquiry

BUSINESS PROCESS

FMCSA has developed the MCMIS Query capability to provide authorized users with access to the MCMIS Database Carrier Census data. MCMIS Query is accessed through the FMCSA COMPASS Portal which is a gateway on the internet that provides single sign-on access to several FMCSA systems including MCMIS. Access through a Virtual Private Network (VPN) or access through AAMVAnet for accessing the MCMIS Database is being eliminated.

The MCMIS Query capability permits inquiry by USDOT Number for Carriers.

6.1.3.1. Submit Inquiry and Receive Response

6.1.3.1.1. Timing: As required by the authorized user

6.1.3.1.2. Processor: PRISM State

6.1.3.1.3. Inquiries Supported

To support this requirement, MCMIS Query will provide the following types of inquiries:

- Carrier by USDOT Number
- Carrier by Name

The Carrier by Name inquiry is used to find the carrier when an incorrect USDOT Number has been supplied.

When a response is received the requestor must review the MCSIP Step to determine the carrier's safety status.

Note: The MCMIS Query and review of the MCSIP Step is only used when the USDOT number is not found on the primary validation file.

6.1.3.2. Process Inquiry and Provide Response

6.1.3.2.1. Timing: MCMIS Query capability is available 24 hours a day, 7 days a week.

6.1.3.2.2. Processor: FMCSA/Volpe

6.1.4. SAFER Web Services

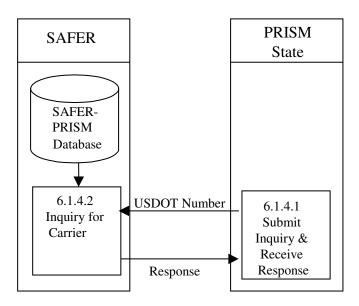


Figure 6.7 – Web Service Database Inquiry

BUSINESS PROCESS

PRISM States may develop Web Services capability to satisfy this requirement using the SAFER Web Services interface and the T0031 output transaction. Details on the SAFER Web Services interface and the T0031 output transaction can be found in the SAFER Interface Control Document, Version 8.1 which can be obtained from the CVISN website at http://cvisn.fmcsa.dot.gov/default.aspx?PageID=safer. The Web Services application provides connectivity to the SAFER Web Services Server. In order to access this server a SAFER VPN and UAS account are required. Contact FMCTechSup@Dot.Gov for information on acquiring these accounts.

The Web Service Client will submit queries to the SAFER Web Services and process the resulting XML document, which is returned by the SAFER Web Services Server.

6.1.4.1. Submit Inquiry and Receive Response

6.1.4.1.1. Timing: As required by the authorized user

6.1.4.1.2. Processor: PRISM or CVISN State

6.1.4.1.3. Inquiries Supported

The T0031 query is the only option currently available. The T0031 query is by USDOT.

When a response is received, the MCSIP Step must be reviewed to determine the carrier's safety status.

6.1.4.2. Process Inquiry and Provide Response

6.1.4.2.1. Timing: Web Services Query capability is available 24 hours a day, 7 days a week.

6.1.4.2.2. Processor: FMCSA/Volpe

6.2. Requirement: Update SAFER-PRISM Database with Targeted Vehicles Nightly

PRISM States are required to update the SAFER-PRISM Database each business night with all targeted vehicles (i.e., vehicles assigned for safety to a MCSIP carrier). This process can be accomplished using PRISM Files or the CVIEW database. When using PRISM files all targeted vehicles are sent. When using CVIEW all IRP vehicle and registration changes must be sent to SAFER. The vehicle record submitted to SAFER must contain the USDOT Number of the carrier that the vehicle is assigned to for safety.

Associated with this requirement PRISM States will create a file or report to alert IRP registration office management within 24 hours when there are vehicles registered in their State that are linked to a carrier affected by the issuance or rescission of a Federal Out-of-Service Order. See Section 6.2.3 for additional detail.

Note: When State Inspectors or FMCSA State Investigators conduct a Compliance Review which results in a proposed unfit/unsat rating, vehicles registered in a Non-PRISM State for which the Carrier is responsible for safety should be faxed to the PRISM Central Site. Updates for these vehicles are done by the PRISM Central Site.

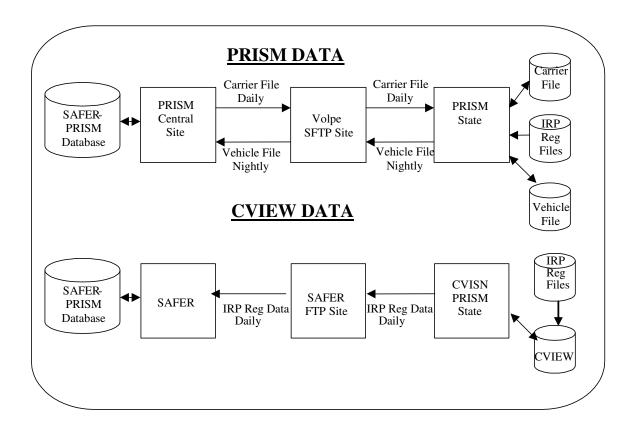


Figure 6.8 – SAFER-PRISM Database Targeted Vehicle Updates

6.2.1. Use PRISM Vehicle File to Update SAFER-PRISM Database Nightly

6.2.1.1. Create PRISM Vehicle File and Send to PRISM Central Site Nightly

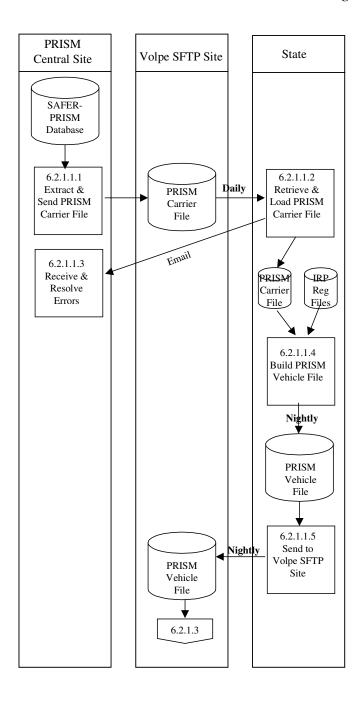


Figure 6.9 – PRISM State Vehicle File Creation

BUSINESS PROCESS

The purpose of this Section is to create the Daily PRISM Carrier File, transmit the PRISM Carrier File to the Volpe SFTP Site, initialize a State's Local PRISM Carrier File, create the State's PRISM Vehicle File and send the PRISM Vehicle File to the Volpe SFTP Site,

Participating PRISM States may retain a Local PRISM Carrier File. Individual updates to the PRISM Carrier File are not applied by the State, but rather a complete refresh of the PRISM Carrier File is available from the Volpe SFTP Site on a daily basis to replace the existing Local PRISM Carrier File.

This process is performed when a new State begins PRISM production and on a daily basis thereafter.

The PRISM Carrier File is a subset of the PRISM Census File, containing only records for carriers in MCSIP.

The PRISM Central Site provides each participating State with an initial load of the PRISM Carrier File, plus daily reloads of the entire PRISM Carrier File. The file is placed in the Volpe SFTP Site.

The PRISM State retrieves the file from the Volpe SFTP Site and loads it onto its computer.

6.2.1.1.1. Extract and Send PRISM Carrier File

6.2.1.1.1.1. Timing

This process is performed by 6:00am (ET) each day (Monday – Friday) or following the day that the SAFER-PRISM database is updated by SAFER. The PRISM Carrier File must be placed on the Volpe SFTP Site no later than 6:00am (ET).

6.2.1.1.1.2. Processor: PRISM Central Site

6.2.1.1.1.3. Selection

The PRISM Central Site will access the SAFER-PRISM database and extract the relevant data elements for each USDOT Number of a carrier in MCSIP. The MCSIP Flag Field in the PRISM Carrier File contains a "C" for each carrier in MCSIP. Any other value indicates the carrier is not in MCSIP and should not be included in this file.

6.2.1.1.1.4. Validation: None.

6.2.1.1.1.5. Transmission

Send the PRISM Carrier File to the Volpe SFTP Site of all requesting PRISM States.

6.2.1.1.2. Retrieve & Load Local PRISM Carrier File

6.2.1.1.2.1. Timing: This process is performed daily (Monday – Friday) after 6:00am (ET).

- **6.2.1.1.2.2. Processor:** PRISM State
- **6.2.1.1.2.3. Retrieval:** Retrieve the PRISM Carrier File from the Volpe SFTP Site.
- **6.2.1.1.2.4.** Validation: Standard for Local PRISM Carrier File (See Section 5.1.3.6).

6.2.1.1.2.5. Error Processing

Report all records that fail the validations to the PRISM Central Site. A printed report should always be produced. Report one or two errors or warnings by telephone. Send the printed report (by email to PRISMTechnicalSupport@Dot.Gov) if requested by the PRISM Central Site. The printed report format is shown below. For each record found to be in error, list all error and warning messages. Multiple messages may be placed on the report for a single record.

Local PRISM Carrier File Error and Warning Report

USDOT Number: nnnnnn Tgt Date: CCYYMMDD

USDOT Number: nnnnnn Tgt Date: CCYYMMDD

6.2.1.1.2.6. Update: Load the new copy of the Local PRISM Carrier File, replacing the existing one.

6.2.1.1.3. Receive and Resolve Errors

6.2.1.1.3.1. Timing: This process is performed within 24 hours of receiving notification of errors.

6.2.1.1.3.2. Processor: PRISM Central Site

6.2.1.1.3.3. Retrieval

Receive either a physical copy of the Error and Warning Report produced in Section 6.2.1.1.2.3 or the error and warning information via telephone.

6.2.1.1.3.4. Error Evaluation

Evaluate the number and type(s) of errors and warnings. Coordinate corrective actions with the affected PRISM State(s), MCMIS, and/or SAFER.

6.2.1.1.4. Build PRISM Vehicle File

6.2.1.1.4.1. Timing

This process is performed by Midnight (ET) each business morning. The targeted PRISM Vehicle File must be placed in the Volpe SFTP Site by Midnight (ET).

6.2.1.1.4.2. Processor: PRISM State

6.2.1.1.4.3. Selection

Read each record on the local PRISM Carrier File. Select Vehicle File records from the State Registration files using the USDOT Number (MMCDO1) of the local PRISM Carrier File record. *No vehicle with expired registration should be selected.* For each vehicle, select *only the most current* valid record (i.e., having the latest Registration Expiration Date (VRGDEX)). Suspended vehicles should be included.

The following table selection criteria for selecting Vehicle File records from the State Registration files.

Table 6.3 – Sending Vehicle Registration Records to PRISM Central Site

	Assigned to	Registration	Carrier under	Send to
Item	MCSIP	Dates within	Federal	PRISM
	Carrier?	Consideration? (1)	OOSO? (2)	Central Site
Reg Record	Y	Y	N	Y
Reg Record	Y	Y	Y	Y
Reg Record	Y	N	N/A	N
Reg Record	N	N/A	N/A	N

- (1) Current date is on or after the Registration Issue Date and on or before the Registration Expiration Date or within a period of time from the expiration of the current year's credentials until the date new credentials are required to be displayed or enforcement action could be taken (grace period).
- (2) OOSO means "Out of Service Order".

Processing of TEMP Plates: The Plate Number field is a required field and cannot be blank. For TEMP plates, the Plate Number field can be populated with "TEMPnnnnnn" or similar designator as decided by the State. The "nnnnnn" represents a number determined by the State but cannot duplicate any other plate from the sending State.

6.2.1.1.4.4. Update

Add each selected vehicle record to the PRISM Vehicle File. Note that each Vehicle record written to the PRISM Vehicle file must have a record terminator (i.e., carriage return and line feed). When a State that is entering PRISM has no targeted Vehicle records (and never has had targeted Vehicle records), no PRISM Vehicle File will be sent to the PRISM Central Site

6.2.1.1.4.5. Validation

Ensure that all PRISM Vehicle File records pass the validations in Section 5.1.3.6. If any records do not pass the validation, correct the error(s) before adding them to the PRISM Vehicle File.

6.2.1.1.5. Send to Volpe SFTP Site

6.2.1.1.5.1. Timing

The PRISM Vehicle File must be at the Volpe SFTP Site prior to Midnight (ET) to ensure that it is included in the PRISM Target File Update Process.

6.2.1.1.5.2. Processor: PRISM State

6.2.1.1.5.3. Selection: Select the PRISM Vehicle File

6.2.1.1.5.4. Validation: None.

6.2.1.1.5.5. Transmission

Send the PRISM Vehicle File to the Volpe SFTP Site. This is a full file replacement sent each night, even if no changes have occurred since the last transmission.

Volpe SFTP Site PRISM Central Site State 6.2.1.1.5 All States 6.2.1.2.1 **PRISM** Retrieve Vehicle **PRISM** Files Vehicle Files Compliance State PRISM Review Vehicle Files Vehicle List 6.2.1.2.2 Update Receive & SAFER-PRISM Resolve Database **Errors** Updated SAFER-PRISM Database

6.2.1.2. Update SAFER-PRISM Database with Targeted Vehicles

Figure 6.10 – SAFER-PRISM Database Vehicle File Updates

BUSINESS PROCESS

The PRISM Central Site will access the Volpe SFTP Site at Midnight (ET) each morning to determine if any PRISM Vehicle Files have been received. If one or more PRISM Vehicle Files are located, the PRISM Central Site will use all PRISM Vehicle Files and the Compliance Review Vehicle List File (CRVL) to update the SAFER-PRISM database.

The PRISM Central Site expects each PRISM State using PRISM Files to send the PRISM Vehicle File to the Volpe SFTP Site each business night, even if no changes have occurred since the last transmission.

6.2.1.2.1. Retrieve PRISM Vehicle Files

6.2.1.2.1.1. Timing

This process is performed at Midnight (ET) each business night that PRISM Vehicle Files are received.

6.2.1.2.1.2. Processor: PRISM Central Site

6.2.1.2.1.3. Selection

The PRISM Central Site will select each vehicle record from each State PRISM Vehicle File and the Compliance Review Vehicle List File.

6.2.1.2.1.4. Validation

Standard for PRISM Vehicle File (See Section 5.1.3.6) plus an additional validation as shown below:

Duplicate Reporting and Compliance Review Vehicle List Check

• When the PRISM Central Site receives Vehicle files from the PRISM States, it will compare pairs of vehicle records (from the same vehicle file and across vehicles files) based on PRISM Reporting State, USDOT Number, VIN, Registration Jurisdiction, and Plate Number. There are 32 possible combinations of the five fields. There are three possible errors and three cases that indicate "Data is probably OK, but suspicious - Flag for Investigation". The error and warning conditions as well as the messages to be generated are shown in Table 6.4 below.

Table 6.4 – PRISM Central Site Vehicle File Error Checking

Condition	Error	Warning	Message
All five fields are duplicated	501		Duplicate Record - Arbitrarily selected one
			record
Four of five fields are duplicated (different	502		Duplicate Record except for USDOT
USDOT Number)			Number - Rejected both records
Three of five fields are duplicated	503		Duplicate Record except for USDOT
(different VIN and USDOT Number			Number and VIN - Rejected both records
Three of five fields are duplicated (except		606	Duplicate Record except for registration
for registration jurisdiction and reporting			jurisdiction and reporting PRISM
PRISM jurisdiction)			jurisdiction - investigate
Two of five fields are duplicated (except		607	Duplicate Record except for registration
for registration jurisdiction, reporting			jurisdiction, reporting PRISM jurisdiction,
PRISM jurisdiction, and USDOT Number)			and USDOT Number - investigate
Two of five fields are duplicated (except		612	Duplicate Record except for VIN,
for VIN, registration jurisdiction, and			registration jurisdiction, and reporting
reporting PRISM jurisdiction)			PRISM jurisdiction - investigate

6.2.1.2.1.5. Error Processing

Report all records that fail the validation to the PRISM State. A printed report should always be produced. Report one or two errors or warnings by telephone. Send the printed report by email if requested by the PRISM State. The printed report format is shown below. For each record found to contain an error, list all error and warning messages. Multiple messages may be placed on the report for a single record.

PRISM Vehicle File Error and Warning Report

6.2.1.2.2. Update SAFER-PRISM Database

6.2.1.2.2.1. Timing

This process is performed between Midnight and 6:00am (ET) each night that PRISM Vehicle Files are received.

6.2.1.2.2.2. Processor: PRISM Central Site

6.2.1.2.2.3. Selection: Read each record from the PRISM Carrier and/or Vehicle Files.

6.2.1.2.2.4. Update

Use the following logic and decision tables 6.5 and 6.6 to determine the appropriate update action to take.

PRISM Target File Carrier Records

Table 6.5 – SAFER-PRISM Database Update Decision: Target File Carrier Records

USDOT Number on PRISM Carrier File	USDOT Number on Current PRISM Target File, Carrier Record	Update Applied to PRISM Target File
Y	Y	If changes have occurred, the existing
		Carrier Record fields replaced with
		corresponding fields from the PRISM
		Carrier File. Note that there may be no
		change in the Carrier record.
Y	N	Add Carrier Record
N	Y	Remove Carrier Record and all Vehicle
		Records with the same USDOT Number

- Row 1: A carrier record for a carrier already in MCSIP has had some change in the data record. Update the PRISM Target File, Carrier Record. Note that there may be no change in the Carrier record.
- Row 2: A carrier not previously in MCSIP has been placed in MCSIP. Add the Carrier Record.
- Row 3: A carrier in MCSIP has been removed from MCSIP. Remove the Carrier Record and all Vehicle Records with the same USDOT Number.

Table 6.6 – SAFER-PRISM Database Update Decision: Target File or Compliance Review Vehicle Records

	Update Criteria		Update Action
VIN (VVHVIN) on Vehicle File has matching VIN (VVHVIN) on Target File with Target Indicator = 'T'?	Do the USDOT numbers (MMCDO1) match?	VIN (VVHVIN) NOT on Vehicle File, but on Target File with Target Indicator = 'T'?	Update PRISM Target File?
YES	YES	N/A	If any fields in the Vehicle Record have changed, replace the existing PRISM Target File Vehicle record with the new information, except retain the existing Target Date. Note that there may be no change in the Vehicle record.
YES	NO	N/A	Delete the existing Target record for this VIN and the old USDOT. Add a new vehicle record to the Target File reflecting the new USDOT #: (set Target Indicator = T, set Target Date = current date).
NO	YES OR NO	N/A	Add the vehicle record to the PRISM Target File: (set Target Indicator = T, set Target Date = current date).
N/A	N/A	YES	Delete the existing Target record for this VIN.

- Row 1: A change may have occurred in one or more data elements in the PRISM Vehicle Record. Note that there may be no change in the Vehicle record.
- Row 2: The vehicle had been assigned to one motor carrier that was in MCSIP, and is now being moved to another motor carrier that is in MCSIP.
- Row 3: The vehicle is now being assigned to a motor carrier that is in MCSIP. The vehicle had not been associated with a targeted Carrier in the past.
- Row 4: The vehicle had been assigned to a motor carrier that was in MCSIP, but is no longer associated with the targeted Carrier.

6.2.2. Use CVIEW to Update SAFER-PRISM Database Nightly

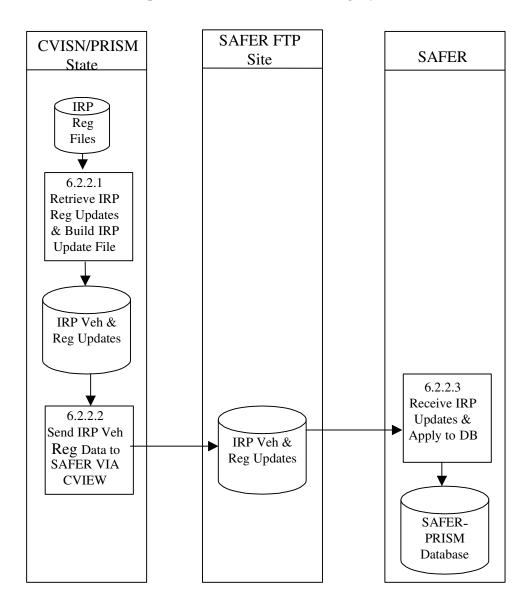


Figure 6.11 – SAFER-PRISM Database CVIEW Updates

BUSINESS PROCESS

PRISM States **may** use a CVIEW as an alternative to using PRISM Files for updating the SAFER-PRISM database on a nightly basis. However, States implementing both CVISN and PRISM programs **must** use CVIEW to update SAFER. To use the CVIEW alternative States must report all IRP vehicle registration changes on at least a daily basis to SAFER via CVIEW, and the vehicle registration data transmitted through CVIEW must identify the USDOT Number of the motor carrier responsible for the vehicle's safety.

It is beyond the scope of this document to explain the detailed processing required to update a PRISM State's CVIEW database or update SAFER using the PRISM State's CVIEW database. Further details on this processing may be found by contacting the SAFER Help Desk by emailing FMCTechSup@Dot.Gov.

6.2.2.1. Retrieve IRP Registration Updates and Build Reg Update File

6.2.2.1.1. Timing

In order to use CVIEW to satisfy PRISM Requirements, States must submit all of their IRP vehicle registration transactions on at least a daily basis to SAFER and each vehicle record submitted must identify the USDOT Number of the carrier responsible for the safety of the vehicle.

6.2.2.1.2. Processor: CVISN/PRISM State

This section applies to those States implementing both the CVISN and PRISM Programs. Further processing rules to build the daily IRP vehicle registration updates for SAFER should be as specified in the SAFER/CVIEW Documentation found on the CVISN Web Site, http://cvisn.fmcsa.dot.gov/, or through contacting the SAFER Help Desk by emailing FMCTechSup@Dot.Gov.

6.2.2.2. Send IRP Vehicle & Registration Data to SAFER via CVIEW

6.2.2.2.1. **Timing:** IRP Vehicle and Registration data must be sent daily to SAFER. Contact SAFER Help Desk at FMCTechSup@Dot.Gov.

6.2.2.2. Processor: CVISN/PRISM State

This section applies to those States implementing both the CVISN and PRISM Programs. Further processing rules to send the daily IRP vehicle registration updates to SAFER should be as specified in the SAFER/CVIEW Documentation found on the CVISN Web Site, http://cvisn.fmcsa.dot.gov/, or through contacting the SAFER Help Desk by emailing FMCTechSup@Dot.Gov.

6.2.2.3. Retrieve IRP Updates and Apply to SAFER-PRISM Database

6.2.2.3.1. Timing

In order to use CVIEW to satisfy PRISM Requirements, SAFER must receive IRP vehicle registration updates and update the SAFER-PRISM Database on at least a daily basis.

6.2.2.3.2. Processor: SAFER

Further processing rules to retrieve the daily IRP vehicle registration updates from CVISN/PRISM States and update the SAFER-PRISM Database should be as specified in the SAFER ICD Documentation found on the CVISN Web Site, http://cvisn.fmcsa.dot.gov/, or through contacting the SAFER Help Desk at FMCTechSup@Dot.Gov.

6.2.3. Alert IRP Registration Office Management of Nightly OOSO Vehicle Changes

Associated with the requirement to update the SAFER-PRISM Database each business night with all targeted vehicles, PRISM States also need to alert IRP registration office management within 24 hours when there are vehicles registered in their State that are linked to a carrier affected by the issuance or rescission of a Federal Out-of-Service Order. This will enable updating of State IRP systems with suspensions, or rescinding of suspensions, for vehicles newly or previously associated with OOSO carrier.

Alerting IRP registration office management is a State internal process, thus each PRISM State is responsible for establishing how this will be accomplished, whether via a file or report, and if additional information is required from State IRP Systems (e.g. account number, address). Recommended processing for States using the PRISM Vehicle File and for States using CVIEW are described below.

6.2.3.1. Alert IRP Management within 24 hours when Vehicles Registered in their State are linked to a Carrier affected by the Issuance or Rescission of a Federal Out-of-Service Order using the PRISM Vehicle File

PRISM States using the PRISM Vehicle File to update the SAFER-PRISM Database will need to compare the prior night's vehicle file with the current night's vehicle file. Any new vehicles on the current night's vehicle file associated with OOSO Carriers or vehicles whose carrier changed from a non-OOSO MCSIP Step to a OOSO MCSIP Step will need to be reported as vehicles that are candidates for suspension. Any vehicles on the previous night's vehicle file associated with OOSO Carriers that are not retained on the current night's vehicle file or whose carrier changed from a OOSO MCSIP Step to a non-OOSO MCSIP Step need to be reported as vehicles whose suspension needs to be rescinded.

6.2.3.2. Alert IRP Management within 24 hours when Vehicles Registered in their State are linked to a Carrier affected by the Issuance or Rescission of a Federal Out-of-Service Order using CVIEW

PRISM States using CVIEW to update the SAFER-PRISM Database may be able to satisfy this requirement as part of their CVIEW processing. Alternatively they could satisfy this requirement through a comparison process similar to that for States using PRISM Vehicle Files.

PRISM States participating in CVISN and having a CVIEW database could use their Local CVIEW database to notify IRP management of nightly vehicle changes associated with OOSO carriers. If the PRISM State has loaded at least the current Carrier Census data into their CVIEW database and receives daily Carrier Census data updates from SAFER, the required OOSO vehicle change information can be obtained when the Carrier Census data updates are applied. All vehicles associated with a Carrier who now has an OOSO MCSIP Step will need to be reported as vehicles that are candidates for suspension. All vehicles associated with a Carrier who now has an OOSO rescinded will need to be reported as vehicles whose suspension needs to be rescinded.

Alternatively PRISM States participating in CVISN and downloading either the Local PRISM Target File or the PRISM XML Targeted Vehicle Transaction File (T0041P) can use either of these files to obtain the OOSO vehicle change information. Comparing the current file received with the prior file received does this. Any new vehicles for the State on the current file associated with OOSO Carriers or vehicles whose carrier changed from a non-OOSO MCSIP Step to a OOSO MCSIP Step will need to be reported as vehicles that that are candidates for suspension. All vehicles for the State on the previous file associated with OOSO Carriers that are not retained on the current file or whose carrier changed from a OOSO MCSIP Step to a non-OOSO MCSIP Step need to be reported as vehicles whose suspension needs to be rescinded.

6.2.4. Add Vehicle Suspension Indicator to State IRP System

If the State IRP system does not provide for an indicator on the system for a suspension, this indicator should be added when a vehicle record is suspended/revoked. In addition, the push to Nlets should include this indicator and be labeled as a suspension due to out-of-service order. FMCSA recommends that a specific code be added to the suspension table so that law enforcement will be aware of the reason for the suspension. IRP suspension information should be transferred to Nlets if not already being done. The transfer can be directly from the IRP system, or by transferring to a State legacy system which already has the capability of transferring to Nlets. The State should work with the Nlets coordinator and their vendor or programming staff to determine how it should be done.

6.3. Requirement: Check Carrier Safety Status before Registration is issued

PRISM States are required to check a motor carrier's Safety Status before issuing any IRP Registration. This includes issuing temporary registrations. Please note that all of the options below support both Carrier and Vehicle inquiries.

It is possible that a motor carrier may be under a Federal Out of Service Order. Checking the MCSIP Step of the Carrier will reveal this. It is also possible that a vehicle may be assigned to a carrier who is not in MCSIP but had been previously assigned to a carrier who was put Out Of Service. PRISM requires that both the carrier Safety Status and the Safety Status of each vehicle be checked before the initial registration or renewal is issued. This type of thorough checking will reveal those motor carriers who have been put Out Of Service and started a new company under a different name.

The MCSIP Step Table contained in Appendix B can be consulted to determine those values that represent Federal Out of Service Orders.

The VIN should be used as the selection criteria for vehicle safety checks. All vehicle records matching the VIN will be returned and the USDOT Number(s) from the target file will be used to retrieve the associated Carrier Record(s).

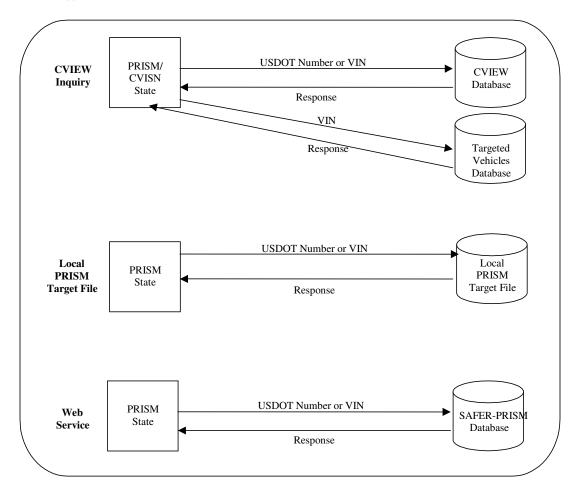


Figure 6.12 – Carrier Safety Status Checks

6.3.1. Check Carrier Safety Status using CVIEW Database

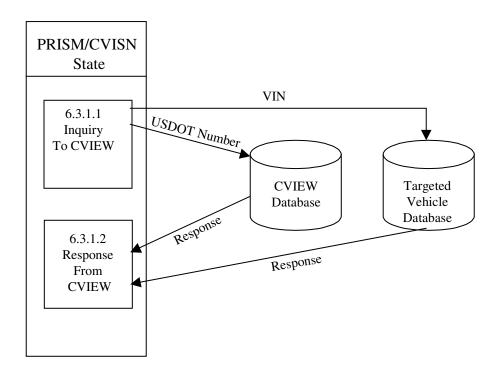


Figure 6.13 – CVIEW Carrier Safety Status Check

BUSINESS PROCESS

PRISM States must check the Carrier Safety Status (i.e., MCSIP Step) before issuing or renewing a registration for a vehicle. The Carrier Safety Status must be checked for all carriers on record associated with the vehicle.

PRISM States participating in CVISN and having a CVIEW database could use their Local CVIEW database to check the Carrier Safety Status for a motor carrier on record associated with the vehicle. If the PRISM State has loaded at least the current Carrier Census data into their CVIEW database and receives daily Carrier Census data updates from SAFER, the CVIEW database will have information on the current motor carrier(s) associated with the vehicle.

The State personnel would use each USDOT number submitted on the initial or renewal registration application to retrieve that carrier's Safety Status from the Carrier Table of the CVIEW database.

PRISM also requires that all carriers associated with the vehicle must be checked, not just if it is submitted on the initial or renewal application. PRISM States participating in CVISN must download either the Local PRISM Target File or the PRISM XML Targeted Vehicle Transaction File (T0041P) and use either of these file/databases to obtain vehicle data by VIN. All vehicle records matching the VIN should be obtained. Then the corresponding USDOT number(s) can be used to retrieve the Carrier Safety Status from each of the associated Carrier Record(s) in the CVIEW database.

Note: Since States need to download targeted vehicle data for doing the Safety Status check by VIN, they could optionally just use downloaded targeted data for doing all Safety Status checks.

States should contact PRISM Target File following the procedures as shown in Section 6.3.2 or for obtaining a copy of the PRISM Transaction T0041P Specification. Refer to Section 6.1.2 for details on initializing and maintaining the CVIEW database. Refer to Appendix G for detail on the T0041P transaction.

6.3.1.1. Inquiry to CVIEW and Local PRISM Target File

6.3.1.1.1. Processor: PRISM State

6.3.1.1.2. Transmission: Send carrier inquiry to Local CVIEW database and vehicle inquiries to either the Local PRISM Target File or the PRISM XMLTargeted Vehicle Transaction File (T0041P).

Carrier Inquiry

The carrier inquiry should use the USDOT Number (MMCDO1) as the key.

Vehicle Inquiry

The vehicle inquiry should be to either the Local PRISM Target File or the PRISM XML Targeted Vehicle Transaction File (T0041P) and use the VIN (VVHVIN) as the key.

6.3.1.2. Response from CVIEW & Local PRISM Target File

6.3.1.2.1. Processor: PRISM State

6.3.1.2.2. Reception

When the Carrier response is received from the Local CVIEW database the program should:

• Inform the user of the results (i.e., Federal OOSO, etc.)

When the Vehicle Response is received from the Local PRISM Target File or the PRISM Targeted Vehicle File (T0041P)(XML), the program should:

• When all vehicles safety status have been checked, the user should be informed (i.e., registration continues or registration stopped).

6.3.2. Check Carrier Safety Status using Local PRISM Target File

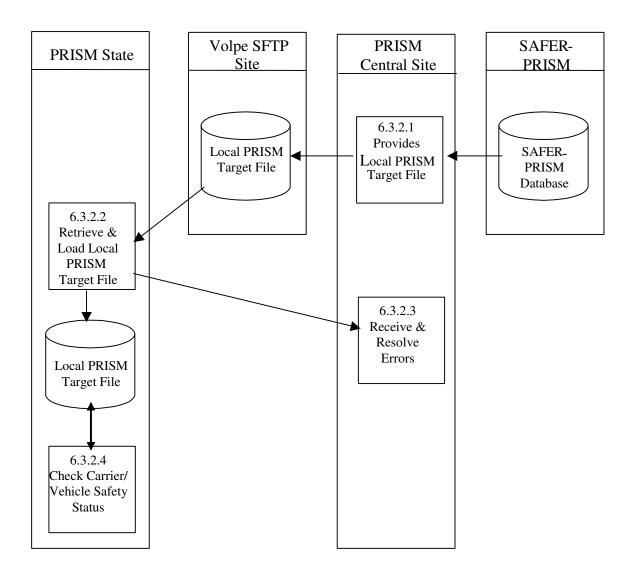


Figure 6.14 – Local PRISM Target File Carrier Safety Status Check

BUSINESS PROCESS

PRISM States must check the Carrier Safety Status (i.e., MCSIP Step) before issuing or renewing a registration for a vehicle. The Carrier Safety Status must be checked for all carriers on record associated with the vehicle. PRISM States may use the Local PRISM Target File for Carrier Safety Status checks.

The PRISM Central Site creates the Local PRISM Target File and transmits the file to the Volpe SFTP Site of requesting PRISM States. PRISM States then retrieve the file.

A Local PRISM Target File is retained by any requesting PRISM State. It is not required.

This process is performed after the PRISM Central Site has updated the SAFER-PRISM database with vehicle information from *all* participating States.

When extracted from the SAFER-PRISM database, the Local PRISM Target File contains records of motor carriers currently in MCSIP (targeted) and the vehicles assigned to MCSIP Carriers. The Local PRISM Target File contains only targeted records. It does **not** contain history records.

If a PRISM State wants to maintain a Local PRISM Target File, the PRISM Central Site sends a complete Local PRISM Target File to the Volpe SFTP Site after it has updated the SAFER-PRISM database at the PRISM Central Site with vehicle information received from *all* participating PRISM States.

For the Carrier Safety Status check, the VIN is used as selection criteria and all Vehicle Records matching the VIN will be returned. The USDOT Number(s) from the Vehicle Record(s) will then be used to retrieve the associated Carrier Record(s). The Plate Number and Registration Jurisdiction should not be used as selection criteria because that will limit the number of records returned by the validation process. Only the Vehicle Records matching the plate number and registration jurisdiction will be returned. The vehicle itself could have additional records on the Target File that would not be returned since they did not match the plate number and registration jurisdiction.

6.3.2.1. Extract Local PRISM Target File

6.3.2.1.1. Timing

This process is performed by 6:00am (ET) each business morning that the PRISM Central Site receives one or more PRISM Vehicle Files. The Local PRISM Target File must be placed on the Volpe SFTP Site by 6:00am (ET).

6.3.2.1.2. Processor: PRISM Central Site

6.3.2.1.3. Selection

Read all carrier and vehicle records from the SAFER-PRISM Database. Select all Carrier and Vehicle records where the Target Indicator = 'T' and create the Local PRISM Target File.

6.3.2.1.4. Transmission:

Place on Volpe SFTP Site.

6.3.2.1.5. Timing: This process must be completed by 6:00am (ET) each business morning.

6.3.2.1.6. Processor: PRISM Central Site

6.3.2.1.7. Selection: Select each Targeted Carrier and Vehicle Record.

6.3.2.1.8. Transmission

Send the Local PRISM Target File to the Volpe SFTP Site. Note that each record must have a record terminator (i.e., carriage return and line feed).

6.3.2.2. Receive and Load local PRISM Target File

6.3.2.2.1. Timing: This process is performed after 6:00am (ET).

6.3.2.2.2. Processor: PRISM State

6.3.2.2.3. Retrieval

Retrieve the Local PRISM Target File from the Volpe SFTP Site.

6.3.2.2.4. Validation: Standard for Local PRISM Target File (See Section 5.1.3.6).

6.3.2.2.5. Error Processing

Report all records that fail the validation to the PRISM Central Site. A printed report should always be produced. Report one or two errors by telephone. Send the printed report (by email to PRISMTechnicalSupport@Dot.Gov) if requested by the PRISM Central Site. The printed report format is shown below. For each record found to be in error, list all error messages. Multiple messages may be placed on the report for a single record.

Local PRISM Target File Error Report

USDOT Number: nnnnnn Tgt Date: CCYYMMDD

6.3.2.2.6. Update

Replace the State's existing local PRISM Target File with the one received from the PRISM Central Site. Delete the existing file first.

6.3.2.3. Resolve Errors

6.3.2.3.1. Timing: This process is performed within 24 hours of receiving notification of errors.

6.3.2.3.2. Processor: PRISM Central Site

6.3.2.3.3. Retrieval

Receive either a physical copy of the Error Report produced in process 6.3.2.2.5 or the error information via telephone.

6.3.2.3.4. Error Evaluation

 $\label{eq:conditional} Evaluate \ the \ number \ and \ type(s) \ of \ errors. \ Coordinate \ corrective \ actions \ with \ the \ PRISM \ State.$

6.3.2.4. Check Carrier/Vehicle Safety Status

6.3.2.4.1. Processor: PRISM State

6.3.2.4.2. Transmission: Send carrier or vehicle inquiry to Local PRISM Target File

Carrier Inquiry

The carrier inquiry should use the USDOT Number (MMCDO1) as the key.

Vehicle Inquiry

The vehicle inquiry should use the VIN (VVHVIN) as the key.

Response from Local PRISM Target File

The response should be formatted according to the State design; however it should include the USDOT number associated with the vehicle.

6.3.3. Check Carrier Safety Status using Web Services

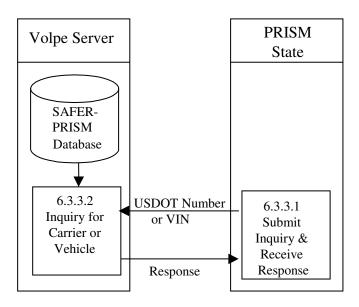


Figure 6.15 – Web Service Carrier Safety Check

BUSINESS PROCESS

PRISM States may develop Web Services capability to satisfy this requirement. PRISM Technical Support offers a PRISM Web Services Startup Package to assist them in developing a Web Service Client. The Startup Package can be obtained by contacting PRISMTechnicalSupport@Dot.Gov. The Web Services application provides connectivity to the PRISM Web Services Server. In order to access this server a VPN account is required. Contact FMCTechSup@Dot.Gov for information on acquiring this account. Additionally a PRISM user account and password are required to perform queries to the PRISM Web Services. Contact PRISMTechnicalSupport@Dot.Gov for information on acquiring this account.

The Web Service Client will submit queries to the PRISM Web Services and process the resulting XML document which is returned by the PRISM Web Services Server. Note, the MCSIP Step of the Safety Carrier is obtained from MCMIS for PRISM Web Services queries, thus the latest OOS status is returned.

Note: SAFER Web Services may also be used for satisfying this requirement. For SAFER Web Services the MCSIP Step of the Safety Carrier is not obtained from MCMIS for the queries. The process for using SAFER Web Services would be similar to that described below for PRISM Web Services.

6.3.3.1. Submit Inquiry and Receive Response

6.3.3.1.1. Timing: As required by the authorized user

6.3.3.1.2. Processor: PRISM or CVISN State

6.3.3.1.3. Inquiries Supported

Two web services queries are available.

The Carrier inquiry uses the USDOT number as the input parameter and returns all targeted vehicles for the carrier in the T0041P XML field format. If no targeted vehicles exist for the carrier, only the XML header is returned indicating not PRISM Targeted. When a response is received the MCSIP Step must be reviewed to determine the carrier's safety status.

The targeted vehicle inquiry uses the VIN as the input parameter and returns all vehicle records associated with the VIN in the T0041P XML field format where the carrier responsible for safety of the vehicle is in the Motor Carrier Safety Improvement Program (MCSIP – PRISM Targeted). If no vehicle records meet the criterion, only the XML header is returned indicating no targeted vehicle records exist for the VIN.

6.3.3.2. Process Inquiry and Provide Response

6.3.3.2.1. Timing: Web Services Query capability is available 24 hours a day, 7 days a week.

6.3.3.2.2. Processor: FMCSA/Volpe

USDOT Number PRISM/ CVIEW **CVIEW CVISN** Inquiry Database State Response VIN or State/Plate Response Targeted Vehicles Database USDOT Number, VIN or State/Plate PRISM Query Query Central State Central Database Response **Nlets** Nlets Law Local PRISM **Inquiry** Enforcement Target File Local USDOT Number, VIN or State/Plate **PRISM** Local PRISM PRISM **Target** Target File State Response File Inquiry USDOT Number, VIN or State/Plate **PRISM** Web SAFER-PRISM State Service Database Response

6.4. Requirement: Provide the Ability to Identify Targeted Vehicles at the Roadside

Figure 6.16 – Targeted Vehicle Identification

Notes:

- 1. CVIEW Inquiry is described in Section 6.3.1
- 2. Query Central is described in Section 6.4.1
- 3. The Nlets Inquiry is described in Section 6.4.2 & 6.4.3
- 4. The Local PRISM Target File Inquiry is described in Section 6.3.2
- 5. Web Service is described in Section 6.4.4

6.4.1. FMCSA Query Central

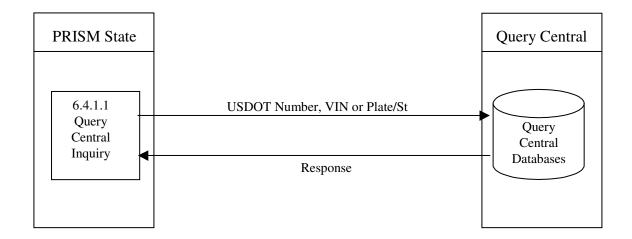


Figure 6.17 – FMCSA Query Central Inquiry

BUSINESS PROCESS

FMCSA has developed the Query Central capability to provide authorized users with access to varying amounts of data from a number of databases. Query Central is accessed through the FMCSA COMPASS portal. Data on motor carriers comes from the SAFER-PRISM Database including the Past Inspection Query Database (PIQ) and the Carrier Snapshot. Out of Service information comes directly from MCMIS and is the up-to-the-minute information. Data is also retrieved from the Licensing & Insurance Database.

The Query Central capability permits inquiry by USDOT Number for Carriers and by License Plate Number & Registration Jurisdiction or Vehicle Identification Number (VIN) for vehicles.

Using the several databases mentioned above Query Central will provide the user a response. More information concerning Query Central can be found at the http://fmcsa-ts.dot.gov/ website.

If the VIN is used as selection criteria, all vehicle records matching the VIN will be returned and the USDOT Number(s) will be used to retrieve the associated Carrier Record(s). If, however, the Plate Number and Registration Jurisdiction are used as selection criteria, only the vehicle records matching the plate number and registration jurisdiction will be returned. The vehicle itself could have additional records on the Target File that would not be returned since they did not match the plate number and registration jurisdiction.

6.4.1.1. Query Central Inquiry

6.4.1.1.1 Timing: As required by the authorized user

6.4.1.1.2. Processor: All States

6.4.1.1.3. Inquiries Supported

Query Central will provide the following types of inquiries:

- Carrier by USDOT Number
- Vehicle by VIN
- Vehicle by License Plate Number & Registration Jurisdiction

6.4.1.2. Query Central Web Site

6.4.1.2.1. Timing: The Query Central Web Site is available 24 hours a day, 7 days a week.

6.4.1.2.2. Processor: Volpe Server

When Query Central receives an inquiry it will collect the data from the several databases and provide the requestor with a response.

6.4.2. Nlets Carrier Status Inquiry

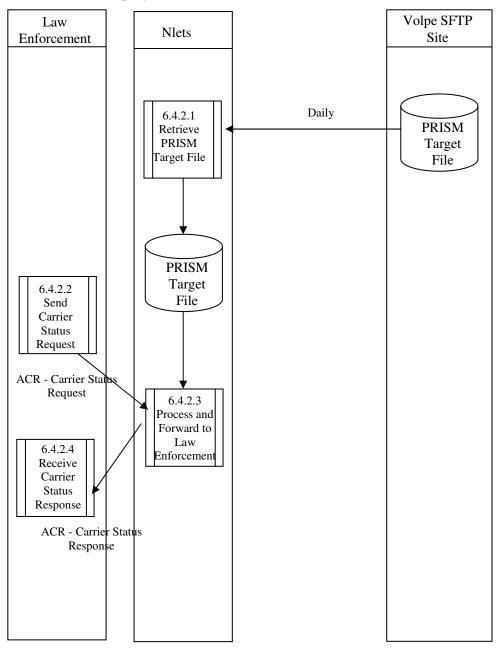


Figure 6.18 – Nlets Carrier Status Inquiry

BUSINESS PROCESS

When Law Enforcement personnel are investigating a vehicle, they may check the responsible carrier's safety status using the Nlets Law Enforcement Carrier Status Request. The Nlets Law Enforcement Carrier Status Request is an interactive check made by USDOT Number that returns an indication of whether or not the carrier is currently in the Motor Carrier Safety Improvement Program (MCSIP).

Law enforcement personnel submit the Nlets Law Enforcement Carrier Status Request to the Nlets System, which makes an inquiry to its PRISM Target File and returns the response to the sender.

6.4.2.1. Retrieve the PRISM Target File

6.4.2.1.1. Processor: Nlets

6.4.2.1.2. Transmission:

Retrieve the PRISM Target File from the Volpe SFTP Site.

6.4.2.2. Send Carrier Status Request

6.4.2.2.1. Processor: Law Enforcement

6.4.2.2.2. Transmission

Submit the Carrier Status Request (ACQ) to Nlets. See Appendix A, Nlets Message Formats for a description of fields in the ACQ message.

• The message *must* contain a USDOT Number (MMCDO1).

Note: the Law Enforcement Carrier Status Request *does not* return vehicle records.

6.4.2.3. Process and Forward to Law Enforcement

6.4.2.3.1. Processor: Nlets Processor

6.4.2.3.2. Reception

The Nlets Processor receives the Carrier Status Request (ACQ) from Law Enforcement. Reference Appendix A, Nlets Message Formats for the format of the message.

6.4.2.3.3. Validation

The Nlets Processor verifies that the Nlets Carrier Status Request (ACQ) can be processed. If an error is detected, return a Status Message (SM). The following check must be performed.

Required Data Check

If the USDOT Number (MMCDO1) is not present, return an error

Message: "REQUIRED DATA WAS NOT SUBMITTED".

6.4.2.3.4. Carrier Data Look-up

6.4.2.3.5. Selection

Select all carrier records from the PRSIM Target File with the same USDOT Number (MMCDO1) as that provided on the request.

If no errors were detected, but the inquiry selected no records from the PRISM Target File, return one PRISM Carrier Status Response (ACR) with the notation CARRIER IS NOT TARGETED.

6.4.2.3.6. Transmission

Forward the Carrier Status Response (ACR) to the inquirer. Reference Appendix A, Nlets Message Formats for the format of the message.

6.4.2.4. Receive Carrier Status Response

6.4.2.4.1. Processor: Law Enforcement

6.4.2.4.2. Reception

Accept the message from Nlets. The message will be one Carrier Status Response(s) (ACR) or one Status Message (SM). Reference Appendix A, Nlets Message Formats for the message format.

If the Nlets Processor encountered an error, the Status Message (SM) will be populated with a description of the problem.

If the Carrier Status Response (ACR) is received with match data, make the information available to the inquirer.

6.4.3. Nlets Vehicle Status Inquiry

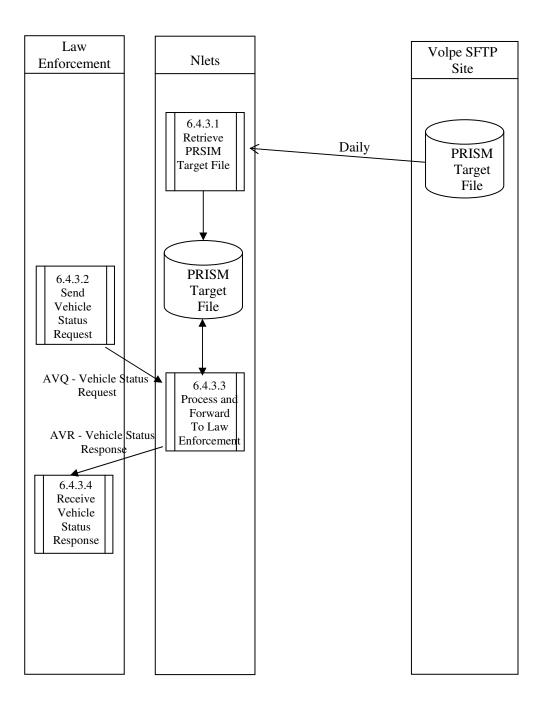


Figure 6.19 – Nlets Vehicle Status Inquiry

BUSINESS PROCESS

Law enforcement personnel may wish to determine if the motor carrier responsible for a vehicle's safety is currently targeted (i.e., in the Motor Carrier Safety Improvement Program (MCSIP)).

Law enforcement personnel can investigate a vehicle with the Nlets Vehicle Status Request (AVQ) to the Target File (maintained at Nlets Operations Center) using the Vehicle Identification Number or a combination of the Plate Number and Registration Jurisdiction.

The inquiry will return a vehicle and a carrier record from the Target File. In the unusual event that the vehicle is assigned to more than one carrier simultaneously (e.g., during the short time when safety assignments overlap), the inquiry will return a vehicle and a carrier record for each assignment.

Law enforcement personnel submit the Nlets Vehicle Status Request (AVQ) to the Nlets System, which queries the PRISM Target File to determine if any vehicle records match the inquiry. If a match is found, the vehicle and corresponding carrier data is retrieved and returned to the requestor. The response may be:

- A Vehicle Response containing match data
- A Vehicle Response indicating that the vehicle is not on file (it is not currently targeted)
- A Status Message indicating an error identified by the Nlets.

6.4.3.1. Retrieve the PRISM Target File

6.4.3.1.1. Processor: Nlets

6.4.3.1.2. Transmission:

Retrieve the PRISM Target File from the Volpe SFTP Site.

6.4.3.2. Send Vehicle Status Request

6.4.3.2.1. Processor: Law Enforcement

6.4.3.2.2. Transmission

Submit the Vehicle Status Request (AVQ) to Nlets. See Appendix A, Nlets Message Formats for a description of the fields in the AVQ message.

The inquiry must contain a vehicle identifier. The identifier may be the VIN (VVHVIN) or both the Plate Number (VRGPLN) and Registration Jurisdiction (VRGJUR).

6.4.3.3. Process and Forward to Law Enforcement

6.4.3.3.1. Processor: Nlets Processor

6.4.3.3.2. Reception

The Nlets Processor receives the Vehicle Status Request (AVQ) from Law Enforcement. Reference Appendix A, Nlets Message Formats for the format of the message.

6.4.3.3.3. Validation

The Nlets Processor verifies that the Vehicle Status Request (AVQ) can be processed. The inquiry must contain a vehicle identifier. The identifier may be the VIN (VVHVIN) or both the Plate Number (VRGPLN) and Registration Jurisdiction (VRGJUR). If an error is detected, return a Status Message (SM).

6.4.3.3.4. Data Look Up

Inquire to the PRISM Target File and receive the response. If a record is found, format the AVR Message (see Appendix A for formatting requirements. If no record is found, format the AVR Message with the notation CARRIER IS NOT TARGETED.

6.4.3.3.5. Forward to Law Enforcement

Forward the Vehicle Response (AVR) or Status Message (SM) to the inquirer. Reference Appendix A, Nlets Message Formats for the format of the message.

6.4.3.4. Receive Vehicle Status Response

6.4.3.4.1. Processor: Law Enforcement

6.4.3.4.2. Reception

Accept the message routed from Nlets. The message will be either a Vehicle Response (AVR) or a Status Message (SM). Reference Appendix A, Nlets Message Formats for the message format. If the Nlets encountered an error, the Status Message (SM) will be populated with a description of the problem.

6.4.4. Identify Targeted Vehicles using Web Services

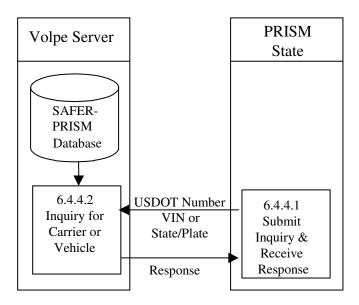


Figure 6.20 – Web Service Targeted Vehicle Identification

BUSINESS PROCESS

PRISM States may develop Web Services capability to satisfy this requirement. PRISM Technical Support offers a PRISM Web Services Startup Package to assist them in developing a Web Service Client. The Startup Package can be obtained by contacting PRISMTechnicalSupport@Dot.Gov. The Web Services application provides connectivity to the PRISM Web Services Server. In order to access this server a VPN account is required. Contact FMCTechSup@Dot.Gov for information on acquiring this account. Additionally a PRISM user account and password are required to perform queries to the PRISM Web Services. Contact PRISMTechnicalSupport@Dot.Gov for information on acquiring this account.

The Web Service Client will submit queries to the PRISM Web Services and process the resulting XML document which is returned by the PRISM Web Services Server. Note, the MCSIP Step of the Safety Carrier is obtained from MCMIS for PRISM Web Services queries, thus the latest OOS status is returned.

Note: SAFER Web Services may also be used for satisfying this requirement. For SAFER Web Services the MCSIP Step of the Safety Carrier is not obtained from MCMIS for the queries. The process for using SAFER Web Services would be similar to that described below for PRISM Web Services.

6.4.4.1. Submit Inquiry and Receive Response

6.4.4.1.1. Timing: As required by the authorized user

6.4.4.1.2. Processor: PRISM or CVISN State

6.4.4.1.3. Inquiries Supported

Two web services queries are currently available.

The Carrier inquiry uses the USDOT number as the input parameter and returns all targeted vehicles for the carrier in the T0041P XML field format. If no targeted vehicles exist for the carrier, only the XML header is returned indicating not PRISM Targeted. When a response is received the MCSIP Step must be reviewed to determine the carrier's safety status.

The targeted vehicle inquiry uses the VIN as the input parameter and returns all vehicle records associated with the VIN in the T0041P XML field format where the carrier responsible for safety of the vehicle is in the Motor Carrier Safety Improvement Program (MCSIP – PRISM Targeted). If no vehicle records meet the criterion, only the XML header is returned indicating no targeted vehicle records exist for the VIN.

6.4.4.2. Process Inquiry and Provide Response

6.4.4.2.1. Timing: Web Services Query capability is available 24 hours a day, 7 days a week.

6.4.4.2.2. Processor: FMCSA/Volpe

6.5. Requirement: Perform MCS-150 Processing

When a State enters PRISM they may or may not have the USDOT Number on their IRP Registration files. States should send the Registrants their normal renewal package with the modified renewal forms that provide for the USDOT Number and TIN to be filled in for the Registrant and, in the Vehicle Schedule, space is provided for the USDOT Number and TIN of the motor carrier responsible for the safety of each vehicle being registered.

For subsequent renewals the State may require the registrants and carriers to update the MCS-150 information directly on MCMIS using the web site, or the State will include MCS-150 information for the Registrant and for each USDOT Number contained on the registrant's vehicle schedules. The data for printing the MCS-150 information will require the State to download the MCS-150 file from the Volpe SFTP Site (contact PRISMTechnicalSupport@Dot.Gov for details on downloading). The printed MCS-150 forms, or streamed MCS-150 information, are then included with the renewal package.

Note that the Local PRISM Census File has a field showing the MCS-150 Last Update Date. If a carrier in a PRISM State has updated their MCS-150 within the past twelve months from the date the new registration period becomes effective, the MCS-150 information does not require updating. For these cases it is not necessary to include the MCS-150 information.

States are strongly encouraged to inform all of their registrants at each renewal period that the registrant and carrier may update their MCS-150 online through the http://www.fmcsa.dot.gov website. By updating on the FMCSA website they will not have to update a MCS-150 and return it with their registration renewal package.

The MCS-150 File available from the Volpe SFTP Site will be refreshed on a monthly basis from the MCMIS database and PRISM States are encouraged to download it as often as they need it to ensure they have the most recent information available for their renewal processing.

PRISM States have the option when they receive the updated MCS-150 forms from their registrants and carriers of entering the update information directly on MCMIS or sending the MCS-150 forms to the FMCSA Contractor who will enter the updated information. Name and address changes must be directly updated into MCMIS by the State and if printing a cab card immediately, name and address changes must also be made to the local Census File or CVIEW database. This update to the local census file or CVIEW is necessary since the data on those files are used to print and bar code the motor carrier responsible for safety information on the cab card.

Note: When printing the information on the renewals for the MCS-150, a space should be provided for the TIN but it should have asterisks in place of the number. This is a privacy concern due to the number possibly being the SSN.

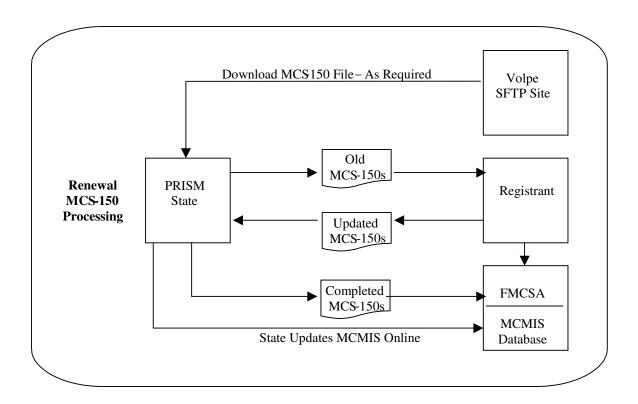


Figure 6.21 – MCS-150 Processing

6.5.1. Renewal MCS-150 Processing

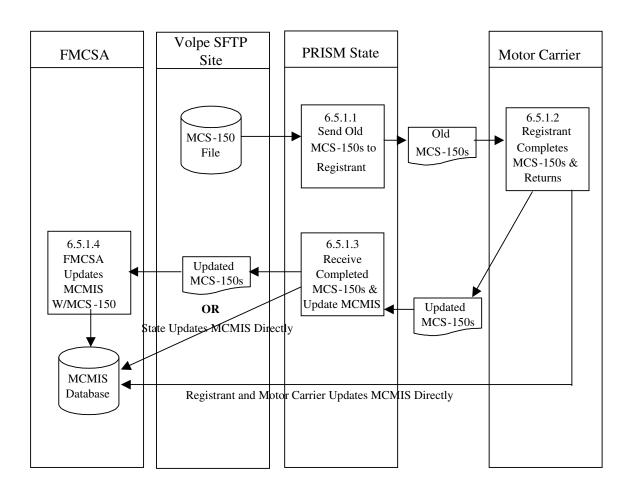


Figure 6.22 – Renewal MCS-150 Processing

BUSINESS PROCESS

Federal Rules require motor carriers to update their MCS-150 Forms at least once every two years. PRISM requires that a carrier update their MCS-150 at IRP renewal time if they have not updated their MCS-150 data within the past year. The Local PRISM Census File (or CVIEW Carrier Census File) has a field, the MCS-150 Last Update Date that should be checked to determine if an updated MCS-150 is required. If the MCS-150 information has been updated within the past twelve months from the effective date of the new registration period, then no updated MCS-150 information is required.

Note: Information is considered current if the information requested on the MCS-150 form has been updated on MCMIS within one year prior to the beginning of the IRP registration year. (This is also less than two years earlier than the last day of the new registration period which satisfies the Federal requirement for carriers to update this information biennially)

All of the information below assumes that an updated MCS-150 is required.

The MCS-150 format, when included in the Registrant's Renewal Package will be a paper form. Carriers should also be encouraged to directly update their MCS-150 information on MCMIS through the following website http://www.fmcsa.dot.gov When the registrant and carrier directly update MCMIS through the FMCSA Web Site the State should receive the updated data in their next database daily Census Updates (either CVIEW or PRISM Local Census File).

Note: When the registrant and carrier directly update MCMIS through the FMCSA Web Site the MCS-150 date has to also be checked and the renewal process stopped if the date is not current.

When the IRP Section receives the completed MCS-150 information from the registrant, they must directly update MCMIS with the carrier name and mailing address, and may then forward the MCS-150 format to the FMCSA data entry contractor, who will enter the remaining changes. Some PRISM States have decided to do all MCS-150 data updates directly with MCMIS.

FMCSA PRISM Data Entry Contractor:

Federal Motor Carrier Safety Administration MC-RIO, W65-206 1200 New Jersey Avenue, SE Washington, DC 20590

6.5.1.1. Send Old MCS-150 Form(s) to Registrant

6.5.1.1.1. Timing: When performing the IRP Renewal

6.5.1.1.2. Processor: PRISM State

6.5.1.1.3. Selection: For each Registrant/Carrier who has registrations being renewed:

 Access the Local PRISM Census File (or CVIEW alternative) and match on the Registrant's USDOT Number.

- From the Local PRISM Census File (or CVIEW alternative) use the MCS-150 Last Update Date field to determine if the MCS-150 has been updated within one year from the beginning of the registration period for the registration being renewed.
 - If the MCS-150 has been updated within one year, do not include an MCS-150 form for the Registrant.
 - If the MCS-150 has not been updated within one year, include a MCS-150 Form for the Registrant using the MCS-150 data contained on the MCS-150 file.
- Access the Local PRISM Census File (or CVIEW alternative) and match on the USDOT Number contained in the Vehicle Record (i.e., Carrier that vehicle is assigned to for safety purposes).
- From the Local PRISM Census File (or CVIEW alternative) use the MCS-150 Last Update Date field to determine if the MCS-150 has been updated within one year from the beginning of the registration period for the registration being renewed.
 - If the MCS-150 has been updated within one year, do not include an MCS-150 form for that vehicle.
 - If the MCS-150 has not been updated within one year, include a MCS-150 Form for that vehicle using the MCS-150 data contained on the MCS-150 file.
- Repeat this process until all Registrants/Carriers being renewed have had all of their vehicle records reviewed.

6.5.1.1.4. Validation: None

6.5.1.1.5. Transmission

Printed renewal packages.

6.5.1.2. Carrier Completes MCS-150 & Returns

It is expected that the registrant will complete the MCS-150 as received, and return the renewal package to the IRP Section. If the carrier updates their MCS-150 directly with the MCMIS Database, the remaining processes are not required.

6.5.1.3. Receive Completed MCS-150 & Update MCMIS

6.5.1.3.1. Timing: As soon as possible after the MCS-150 is received.

6.5.1.3.2. Processor: PRISM State

6.5.1.3.3. Validation: IRP personnel should review the MCS-150 form for completeness.

6.5.1.3.4. Update

IRP personnel should either update MCMIS directly or forward the MCS-150 to the FMCSA Contractor who will perform the data entry.

6.5.1.4. FMCSA Updates MCMIS

6.5.1.4.1. Timing: As soon as possible after the MCS-150 form is received.

6.5.1.4.2. Processor: FMCSA/State IRP personnel

The FMCSA Contractor or State IRP personal will perform the data entry. If the motor carrier has directly updated MCMIS this step is not required.

Appendices A-F

A. Nlets Message Formats

A.1 Introduction

The Nlets messages that are used by PRISM are:

Message Name	Nlets Code
Carrier Status Request	ACQ
Carrier Response	ACR
Vehicle Status Request	AVQ
Vehicle Response	AVR
Status Message	SM

Nlets messages contain a header, the body and a trailer. This introduction describes the header and trailer. A separate section is included that describes the body of each message in the Nlets system that uses PRISM.

A.1.1 Nlets Message Header

A message sent from a law enforcement agency to the Nlets processor contains a header with the following components:

Nlets Component	Nlets Description
STX	Start of text control character
CR/LF/DEL	3 characters - Carriage Return, Line feed, and
	Delete control characters
Xxxx	2-4 Character Message Type
followed by a period	
xxxxxxxxx followed	9 Character sending ORI
by a period	
xxxxxxxxx followed	Either a 2 or 9 digit destination ORI, only one
by a period	per message
*	Asterisk identifies the start of the control field
	(not present if control field not in original
	message)
XXXXXXXXX	Optional 10 character control field
followed by a period	
TXT	Variable Message Text. This may be any
	combination of characters except the ETX
	character must begin with TXT. The message
	text begins on the following line.

Nlets adds date/time stamps to the header. A message received from Nlets contains a header with the following components:

Nlets Component	Nlets Description
STX	Start of text control character
CR/LF/DEL	3 characters - Carriage Return, Line feed, and
	Delete control characters
XXXX	2-4 Character Message Type
followed by a period	
XXXXXXXX	9 Character sending ORI
CR/LF/DEL	3 characters - Carriage Return, Line feed, and
	Delete control characters
hh:mm	Time message received by Nlets on 24-hour
followed by a space	clock
mm/dd/ccyy	Date message received by Nlets in the form
followed by a space	(mm/dd/ccyy) where mm is the 2 digit month,
	dd is the 2 digit day of the month, cc is the 2
	digit century, and yy is the 2 digit year.
nnnnn	A 5 digit number identifying the number of
	messages from the sending terminal today
CR/LF/DEL	3 characters - Carriage Return, Line feed, and
	Delete control characters
hh:mm	Time message was delivered by Nlets on a 24
followed by a space	hours clock in the form hh:mm, where hh is
	hours and mm is minutes
mm/dd/ccyy	Date message is delivered in the form
followed by a space	mm/dd/ccyy, where mm is the month, dd is the
	day of the month, cc is the century, and yy is the
	year
nnnnn	A 5-digit number identifying the total number of
	messages, other than Station Error Message,
	delivered to this station today
XXXXXXXX	Either a 2 or 9 digit destination ORI, only one
	per message
CR/LF/DEL	3 characters - Carriage Return, Line feed, and
	Delete control characters
*	Asterisk identifies the start of the control field
	(not present if control field not in original
	message)
XXXXXXXXX	Optional 10 character control field
followed by a period	
CR/LF/DEL	3 characters - Carriage Return, Line feed, and
	Delete control characters
TXT	Variable Message Text This may be any
	combination of characters except the ETX
	character must begin with TXT. The message
	text begins on the following line.

A.1.2 Nlets Message Trailer

All messages sent/received to/from Nlets have a trailer with the following component:

Nlets Component	Nlets Description
ETX	The end of text control character

A.2 ACQ - Carrier Status Request

Nlets Component	Nlets Description
DOT/(7) followed	USDOT Number. If the USDOT
by a period	Number is used, "DOT/" followed
	by the USDOT Number must be
	provided. Format will be right
	justified with leading zeroes.

A.3 ACR - Carrier Response

A.3.1 Message Layout for an ACR Response with Match Data

Depending on the value of the MCSIP Step one or more of the following messages will be displayed:

CARRIER IS TARGETED

CARRIER IS NOT TARGETED

CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT

CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT CARRIER IS UNDER FEDERAL OOSO - REVOCATION OR SUSPENSION OF OPERATING AUTHORITY CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY

In some cases (shown below) the following message will be appended to the OOSO message INTRASTATE OUT OF SERVICE

If the MCSIP Step = 00, 30, or 99 display "CARRIER IS NOT TARGETED"

If the MCSIP Step = 02, 03, 06, 07, 08, 10, 12, 13,22, 31, 32, 33, 34, 35, 36, 37, 38, 39, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, or 89 display "CARRIER IS TARGETED"

If the MCSIP Step = 52 display "CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF OPERATING AUTHORITY AND INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 53 display "CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY AND INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 54 display "CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD"

If the MCSIP Step = 55 display "CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT"

If the MCSIP Step = 57 display "CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY"

If the MCSIP Step = 59 display "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 60 display "CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD" and "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 61 display "CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT" and "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 62 display "CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY" and "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 63 display "CARRIER IS UNDER FEDERAL OOSO - NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT"

If the MCSIP Step = 64 display "CARRIER IS UNDER FEDERAL OOSO - NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT"

If the MCSIP Step = 65 display "CARRIER IS UNDER FEDERAL OOSO - REVOCATION OR SUSPENSION OF OPERATING AUTHORITY"

If the MCSIP Step = 66 display "CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY"

If the MCSIP Step = 67 display "CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT AND INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 68 display "CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT AND INTRASTATE OUT OF SERVICE"

All of the above messages will be in CAPITAL LETTERS and centered on the line.

Nlets Component	Nlets Description
None	Carrier Status Message
USDOT NBR/(7)	USDOT Number
followed by a period	
NAM/(55)	Legal Name - Maximum of 55
followed by a period	(A/N) characters
DBA/(55)	DBA Name - Maximum of 55
followed by a period	(A/N) characters
ADR/(30)	Carrier Street Business Address
followed by a period	
CITY/(25)	Carrier City Business Address
followed by a period	
ST/(2)	Carrier State Code Business
followed by a period	Address
ZIP/(5)	Carrier Zip Business Address
followed by the	
expanded zip	
business address	
(5) placed	Carrier Expanded Zip Business
immediately behind	Address
Zip Business	
Address followed by	
a period	
CAR TARG-	Carrier Target Indicator
IND/(1)	
Followed by a	
period	
CAR TARG-	Carrier Target Date
DATE/(8)	
(MMDDCCYY)	
Followed by a	
period	MCGALD G
MCSIP STEP/(2)	MCSIP Step
Followed by a	
period	MCGIPG
MCSIP DATE/(8)	MCSIP Step Date
(MMDDCCYY)	
Followed by a	
period	

A.4 ACQ/ACR - Carrier Status Request/Response Example

Carrier Status Request (ACQ) - As received by the Nlets Processor

STX	where STX = Start of Text Control character
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
ACQ.	where ACQ = Message type followed by a period
xxxxxxxx.	9 character sending ORI followed by a period
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters

hh:mm	Time message received by Nlets on 24-hour clock
-	Space to separate input time from input date
mm/dd/ccyy	Date message received by Nlets in the format (mm/dd/ccyy) where mm is the 2 digit month, dd is the 2 digit day of the month, and ccyy is the 4 digit year.
_	Space to separate input date from input sequence number
nnnnn	A 5 digit number identifying the number of messages from the sending terminal today.
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
hh:mm	Time message delivered by Nlets on 24-hour clock
_	Space to separate output time from output date
mm/dd/ccyy	Date message delivered by Nlets in the format (mm/dd/ccyy) where mm is the 2 digit month, dd is the 2 digit day of the month, and ccyy is the 4 digit year.
_	Space to separate output date from output sequence number
nnnnn	A 5 digit number identifying the total number of messages, other than Station Error Message, delivered to this station today.
-	Space to separate output sequence number from destination ORI.
xxxxxxxx(.)	Either a 2 or 9 digit destination ORI, only one per message, followed by a period.
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
*	Asterisk identifies the start of the control field (not present if control field not in original message).
xxxxxxxxx(.)	Optional 10 character control field followed by a period (omit if no control field)
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
TXT	Variable Message Text. This may be any combination of characters except the ETX character. Must begin with TXT. The message text begins on the following line.
DOT/xxxxxxxx(.)	USDOT Number must be provided followed by a period. Right justification with leading zeros is required.
ETX	The end of text control character.

 $^{&#}x27;\mathrm{x}'$ is used to denote field sizes for all examples.

(.) Denotes period at end of field. The brackets () will not be shown on the message.

Carrier Response - As provided to the Law Enforcement requestor by the Nlets Processor.

Example of a normal response (with data)

STX CR/LF/DEL ACR(.) AV00000VS(.) xxxxxxxxx(.) *xxxxxxxxx(.)

CARRIER IS TARGETED CARRIER IS NOT TARGETED

CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT CARRIER IS UNDER FEDERAL OOSO - REVOCATION OR SUSPENSION OF OPERATING AUTHORITY CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY

In some cases (shown below) the following message will be appended to the OOSO message INTRASTATE OUT OF SERVICE

(One or more of the above fields will be provided depending on the value of the MCSIP Step) $\$

DOT/xxxxxxx(.)*

CITY/xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx(.) ST/xx(.) ZIP/xxxxx-xxxx(.)*

CAR TARG-IND/x(.) MCSIP STEP/xx(.)MCSIP DATE/MMDDCCYY(.)*

(1) Out of Service Order

'x' is used to denote field sizes for all examples.

- (.) Denotes period at end of field. The brackets () will not be shown on the message.
- * Denotes end of line which will contain a CR/LF

Note: The following two paragraphs have been extracted from the Nlets System Manual, Section $1.3.4\,$ Message Format.

"All formats for message headers, control characters, inquiry inputs and responses, control/status messages, and error messages are fixed. When these formats differ from State formats, each State must reformat input and output to interface properly with Nlets. When sending fixed format messages to Nlets, trailing spaces in each data field should not be sent. For example if the name field can hold a maximum of 30

characters but the name submitted is only 15 characters the State should remove the trailing 15 spaces. This will improve the efficiency of the network by eliminating unnecessary data."

"As is defined in the section of this document covering message formats, all messages will be forwarded by Nlets using standard USASCII characters. Nlets expects an 80 character line to be delivered. If Nlets does not see a CR/LF within 80 characters, Nlets will insert CR/LF characters at the 81st character. There are special provisions made for a few users that use non-standard line lengths. If a user is faced with this problem they should contact the Nlets administrative offices."

When a field is likely to be blank most of the time, e.g., DBA/...., include the field in the ACR message, even if it contains no data. This will keep the format of the ACR message consistent.

If an inquiry to the Nlets PRISM Target File returns a "NOT FOUND" condition. The ACR will be returned with the USDOT Number and the notation "CARRIER IS NOT TARGETED".

A.5 AVQ - Vehicle Inquiry

Nlets Component	Nlets Description
VIN/(17) followed	If the Vehicle Identification
by a period	Number is used, "VIN/" followed
	by the (A/N) character identifier
	for the VIN must be provided
LIC/(10) followed	If Registration State and License
by a period	Plate Number is used, "LIC/"
	followed by a license plate number
	with a maximum of 10 (A/N)
	characters must be provided
LIS/(2) followed by	If Registration State and License
a period	Plate Number is used, "LIS/"
	followed by the 2 (A) character
	identifier for the Registration State
	must be provided

A.6 AVR - Vehicle Response

A.6.1 Message Layout for an AVR Response with Match Data

Depending on the value of the MCSIP Step one or more of the following messages will be displayed:

CARRIER IS TARGETED
CARRIER IS NOT TARGETED
CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD
CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT
CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT CARRIER IS UNDER FEDERAL OOSO - REVOCATION OR SUSPENSION OF OPERATING AUTHORITY

CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY

In some cases (shown below) the following message will be appended to the OOSO message INTRASTATE OUT OF SERVICE

If the MCSIP Step = 00, 30, or 99 display "CARRIER IS NOT TARGETED"

If the MCSIP Step = 02, 03, 06, 07, 08, 10, 12, 13,22, 31, 32, 33, 34, 35, 36, 37, 38, 39, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, or 89 display "CARRIER IS TARGETED"

If the MCSIP Step = 52 display "CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF OPERATING AUTHORITY AND INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 53 display "CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY AND INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 54 display "CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD"

If the MCSIP Step = 55 display "CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT"

If the MCSIP Step = 57 display "CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY"

If the MCSIP Step = 59 display "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 60 display "CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD" and "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 61 display "CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT" and "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 62 display "CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY" and "INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 63 display "CARRIER IS UNDER FEDERAL OOSO - NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT"

If the MCSIP Step = 64 display "CARRIER IS UNDER FEDERAL OOSO - NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT"

If the MCSIP Step = 65 display "CARRIER IS UNDER FEDERAL OOSO - REVOCATION OR SUSPENSION OF OPERATING AUTHORITY"

If the MCSIP Step = 66 display "CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY"

If the MCSIP Step = 67 display "CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT AND INTRASTATE OUT OF SERVICE"

If the MCSIP Step = 68 display "CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT AND INTRASTATE OUT OF SERVICE"

The above messages will be in CAPITAL letters and centered on the line.

Nlets Component	Nlets Description
Vehicle Information	
VMA/(4)	Vehicle Make
followed by a period	
VYR/(4)	Vehicle Year
followed by a period	
VIN/(17)	Vehicle Identification Number
followed by a period	
LIC/(10)	License Plate Number
followed by a period	
LIS/(2) followed by a	Registration Jurisdiction
period	
REG EFF DATE/(8)	Registration Effective Date
(MMDDCCYY)	
followed by a period	

Nlets Component	Nlets Description
REG EXP DATE/(8)	Registration Expiration Date
(MMDDCCYY)	
followed by a period	
VEH TARG-IND/(1)	Vehicle Target Indicator
followed by a period	_
Carrier Information	
None	Carrier Status Message
DOT(7)	USDOT Number
followed by a period	
NAM/(55)	Legal Name - Maximum of 55
followed by a period	(A/N) characters
DBA/(55)	DBA Name - Maximum of 55
followed by a period	(A/N) characters
ADR/(30)	Carrier Street Business Address
followed by a period	
CITY/(25)	Carrier City Business Address
followed by a period	
ST/(2)	Carrier State Code Business
followed by a period	Address
ZIP/(5)	Carrier Zip Business Address
followed by the zip	
business address	
(5) placed	Carrier Expanded Zip Business
immediately behind	Address
Zip Business Address	
followed by a period	
CAR TARG-	Carrier Target Indicator
IND/(1)	
followed by a period	
MCSIP STEP/(2)	MCSIP Step
followed by a period	
MCSIP DATE/(8)	MCSIP Step Date
(MMDDCCYY)	
followed by a period	

A.7 AVQ/AVR - Vehicle Status Request/Response Example

Vehicle Status Request (AVQ) - As received by the Nlets Processor.

STX	where STX = Start of Text Control character
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
AVQ.	where AVQ = Message type followed by a period
xxxxxxxx(.)	9 character sending ORI followed by a period
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
hh:mm	Time message received by Nlets on 24-hour clock
_	Space to separate input time from input date

mm/dd/ccyy	Date message received by Nlets in the format
	(mm/dd/ccyy) where mm is the 2 digit month, dd is the 2 digit day of the month, and ccyy is the 4 digit year.
-	Space to separate input date from input sequence number
nnnnn	A 5 digit number identifying the number of messages from the sending terminal today.
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
hh:mm	Time message delivered by Nlets on 24-hour clock
-	Space to separate output time from output date
mm/dd/ccyy	Date message delivered by Nlets in the format (mm/dd/ccyy) where mm is the 2 digit month, dd is the 2 digit day of the month, and ccyy is the 4 digit year.
-	Space to separate output date from output sequence number
nnnnn	A 5 digit number identifying the total number of messages, other than Station Error Message, delivered to this station today.
-	Space to separate output sequence number from destination ORI.
xxxxxxxx(.)	Either a 2 or 9 digit destination ORI, only one per message followed by a period.
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
*	Asterisk identifies the start of the control field (not present if control field not in original message).
xxxxxxxxx(.)	Optional 10 character control field with period (omit if no control field).
CR/LF/DEL	3 characters - Carriage Return, Line feed, and Delete Control Characters
TXT	Variable Message Text. This may be any combination of characters except the ETX character. Must begin with TXT.
(1)VIN/xxxxxxxxxxx	xxxxxx(.) If the Vehicle Identification Number (VIN) is used it must be followed by a period. OR
(1)LIC/xxxxxxxxxxx(.) If Registration State and License Plate Number
(1); TC/yy/)	is used they each must be followed by a period.

Registration State

The end of text control character.

(1)LIS/xx(.)

 $^{^{(1)}}$ = Either the VIN or the License Plate Number and Registration State must be submitted.

'x' is used to denote field sizes for all examples.

(.) Denotes period at end of field. The brackets () will not be shown on the message.

Vehicle Response - As provided to the Law Enforcement requestor by the Nlets Processor.

Example of a normal response (with data)

STX CR/LF/DEL AVR(.) AV00000VS(.) xxxxxxxxx(.) *xxxxxxxxx(.)

CARRIER IS TARGETED CARRIER IS NOT TARGETED

CARRIER IS UNDER FEDERAL OOSO – IMMINENT HAZARD CARRIER IS UNDER FEDERAL OOSO – UNSAT/UNFIT CARRIER IS UNDER FEDERAL OOSO – FAILURE TO PAY

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR REFUSAL OF AUDIT/NO CONTACT

CARRIER IS UNDER FEDERAL OOSO – NEW ENTRANT REVOKED FOR FAILURE OF SAFETY AUDIT CARRIER IS UNDER FEDERAL OOSO - REVOCATION OR SUSPENSION OF OPERATING AUTHORITY CARRIER IS UNDER FEDERAL OOSO – REVOCATION OR SUSPENSION OF FOR HIRE OPERATING AUTHORITY

In some cases (shown below) the following message will be appended to the OOSO message INTRASTATE OUT OF SERVICE

(One or more of the above fields will be provided depending on the value of the MCSIP Step)

DOT/xxxxxxx(.)*

CAR TARG-IND/x(.) MCSIP STEP/xx(.)MCSIP DATE/MMDDCCYY(.)*

(1) Out of Service Order

VMA/xxxx(.) VYR/xxxx(.) VIN/xxxxxxxxxxxxxxxxx (.)*
LIC/xxxxxxxxxx(.) LIS/xx(.) REG EFF DATE/MMDDCCYY(.) *
REG EXP DATE/MMDDCCYY(.) VEH-TARG-IND/X(.)*
ETX

Note: The lines which pertain to vehicle and registration information may occur up to 10 times.

A maximum of 10 RV messages may be received from the PRISM Central Site. If multiple AVR messages are sent the following notation will appear at the end of the page:

PAGE n OF nn PAGES

* Denotes end of line which will contain a CR/LF

See the note following the Carrier Response (ACR) example in Section C.4 for rules on compressing blanks from unfilled fields, placing the CR/LF at the end of a line, and populating unused fields (e.g., DBA/).

If an inquiry to the PRISM Target File produces a NOT FOUND condition the AVR message will contain the following notation "CARRIER IS NOT TARGETED".

A.8 Status Message (SM)

Nlets Component	Nlets Description
Message received	Three types of messages can be received in the SM Message
	1. Generated manually by Nlets' Operators to indicate Nlets is going "Down". ORI starts with "NL00000" or "AZNlets" and TXT is "Nlets TEMPORARILY OUT OF SERVICE UNTIL xxxx aaa" or "Nlets IN SERVICE".
	2. Validation message automatically generated by Nlets switcher. ORI is NL0000000
	3. Generated by State or other user. ORI does not start with NL00000 or AZNlets

B. MCSIP Steps

Comprehensive MCSIP Step Chart (MCMIS and Monthly SafeStat)

Step Number	Targeted at Roadside	Deny Registration	Step Description	Section of the Monthly Required Actions Report that Carrier will Show Up On	External Description for Web Sites, Inspection Software etc
0	N	N	Not In MCSIP	N/A	Not Targeted
2	Y	N	SafeStat Warning Group	Warning Letter	Targeted
3	Y	N	Past Due CR	Past Due CR	Targeted
6	Y	N	Warning Letter Sent	N/A	Targeted
7	Y	N	Mandatory CR	Mandatory CR	Targeted
8	Y	N	Recommended CR	Recommended CR	Targeted
10	Y	N	Informational Monitoring	Informational Monitoring	Targeted
12	Y	N	SafeStat Category A or B	N/A	Targeted
13	Y	N	SafeStat Category C but no warning letter	N/A	Targeted
22	Y	N	Compliance Review Complete	N/A	Targeted
30	N	N	DEFICIENT BASICS: NONE	N/A – New CSA Step	Not Targeted
31	Y	N	DEFICIENT BASICS: FATIGUED DRIVING	N/A – New CSA Step	Targeted
32	Y	N	DEFICIENT BASICS: FATIGUED DRIVING & VEH MAINT	N/A – New CSA Step	Targeted
33	Y	N	DEFICIENT BASICS: FATIGUED & UNSAFE DRIVING	N/A – New CSA Step	Targeted
34	Y	N	DEFICIENT BASICS: FATIGUED DRIVING, DRUG/ALCOHOL	N/A – New CSA Step	Targeted
35	Y	N	DEFICIENT BASICS: FATIGUED DRIVING, CARGO SECURING	N/A – New CSA Step	Targeted
36	Y	N	DEFICIENT BASICS: FATIGUED DRIVING, DRIVER FITNESS	N/A – New CSA Step	Targeted
37	Y	N	DEFICIENT BASICS: FATIGUED DRIVING, CRASH EXP	N/A – New CSA Step	Targeted
38	Y	N	DEFICIENT BASICS: VEH MAINT	N/A – New CSA Step	Targeted
39	Y	N	DEFICIENT BASICS: VEH MAINT, UNSAFE DRIVING	N/A – New CSA Step	Targeted
52	Y	Y	OOSO – Revocation or Suspension of Operating Authority and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	OOS: Revocation or Suspension of Operating Authority and Intrastate Out of Service
53	Y	Y	OOSO – Revocation or Suspension of For Hire Operating Authority and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	OOS: Revocation or Suspension of For Hire Operating Authority and Intrastate Out of Service
54	Y	Y	OOSO - Imminent Hazard	OOS (if interstate activity in last 6 months)	OOS: Imminent Hazard
55	Y	Y	OOSO – Unsat/Unfit	OOS (if interstate activity in last 6 months)	OOS: Unfit Motor Carrier
57	Y	Y	OOSO – Failure to Pay Fine for Safety Violation	OOS (if interstate activity in last 6 months)	OOS: Failure to Pay

Step Number	Targeted at Roadside	Deny Registration	Step Description	Section of the Monthly Required Actions Report that Carrier will Show Up On	External Description for Web Sites, Inspection Software etc
59	Y	N	Intrastate Out of Service	N/A – Intrastate Only	Intrastate Out of Service
60	Y	Y	OOSO – Imminent Hazard and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	OOS: Imminent Hazard and Intrastate Out of Service
61	Y	Y	OOSO – Unsat/Unfit and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	OOS: Unfit Motor Carrier and Intrastate Out of Service
62	Y	Y	OOSO – Failure to Pay and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	OOS: Failure to Pay and Intrastate Out of Service
63	Y	Y	OOSO – New Entrant Revoked for Refusal of Audit/No Contact	OOS (if interstate activity in last 6 months)	New Entrant – OOSO Revoked for Refusal of Audit/No Contact
64	Y	Y	OOSO – New Entrant Revoked for Failure of Safety Audit	OOS (if interstate activity in last 6 months)	New Entrant – OOSO Revoked for Failure of Safety Audit
65	Y	Y	OOSO – Revocation or Suspension of Operating Authority	OOS (if interstate activity in last 6 months)	OOS: Revocation or Suspension of Operation Authority
66	Y	Y	OOSO – Revocation or Suspension of For Hire Operating Authority	OOS (if interstate activity in last 6 months)	OOS: Revocation or Suspension of For Hire Operating Authority
67	Y	Y	OOSO – New Entrant Revoked for Refusal of Audit/No Contact and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	New Entrant – OOSO Revoked for Refusal of Audit/No Contact and Intrastate Out of Service
68	Y	Y	OOSO – New Entrant Revoked for Failure of Safety Audit and Intrastate Out of Service	OOS (if interstate activity in last 6 months)	New Entrant – OOSO Revoked for Failure of Safety Audit and Intrastate Out of Service
70	Y	N	DEFICIENT BASICS: VEH MAINT, DRUG/ALCOHOL	N/A – New CSA Step	Targeted
71	Y	N	DEFICIENT BASICS: VEH MAINT, CARGO SECURING	N/A – New CSA Step	Targeted
72	Y	N	DEFICIENT BASICS: VEH MAINT, DRIVER FITNESS	N/A – New CSA Step	Targeted
73	Y	N	DEFICIENT BASICS: VEH MAINT, CRASH EXP	N/A – New CSA Step	Targeted
74	Y	N	DEFICIENT BASICS: UNSAFE DRIVING	N/A – New CSA Step	Targeted
75	Y	N	DEFICIENT BASICS: UNSAFE DRIVING, DRUG/ALCOHOL	N/A – New CSA Step	Targeted
76	Y	N	DEFICIENT BASICS: UNSAFE DRIVING, CARGO SECURING	N/A – New CSA Step	Targeted
77	Y	N	DEFICIENT BASICS: UNSAFE DRIVING, DRIVER FITNESS	N/A – New CSA Step	Targeted
78	Y	N	DEFICIENT BASICS: UNSAFE DRIVING, CRASH EXP	N/A – New CSA Step	Targeted
79	Y	N	DEFICIENT BASICS: DRUG/ALCOHOL	N/A – New CSA Step	Targeted
80	Y	N	DEFICIENT BASICS: DRUG/ALCOHOL, CARGO SECURING	N/A – New CSA Step	Targeted

Step Number	Targeted at Roadside	Deny Registration	Step Description	Section of the Monthly Required Actions Report that Carrier will Show Up On	External Description for Web Sites, Inspection Software etc
81	Y	N	DEFICIENT BASICS: DRUG/ALCOHOL, DRIVER FITNESS	N/A – New CSA Step	Targeted
82	Y	N	DEFICIENT BASICS: DRUG/ALCOHOL, CRASH EXP	N/A – New CSA Step	Targeted
83	Y	N	DEFICIENT BASICS: CARGO SECURING	N/A – New CSA Step	Targeted
84	Y	N	DEFICIENT BASICS: CARGO SECURING, DRIVER FITNESS	N/A – New CSA Step	Targeted
85	Y	N	DEFICIENT BASICS: CARGO SECURING, CRASH EXP	N/A – New CSA Step	Targeted
86	Y	N	DEFICIENT BASICS: DRIVER FITNESS	N/A – New CSA Step	Targeted
87	Y	N	DEFICIENT BASICS: DRIVER FITNESS, CRASH EXP	N/A – New CSA Step	Targeted
88	Y	N	DEFICIENT BASICS: CRASH EXP	N/A – New CSA Step	Targeted
89	Y	N	DEFICIENT BASICS: MORE THAN TWO	N/A – New CSA Step	Targeted
99	N	N	Carrier Out of Business	N/A	Not Targeted

C. Data Dictionary

Element Code	Business & Call List Names	Type /Len	Description & Values
BJUCDE	JURISDICTION CODE NONE	X(02)	An organization with power, right or authority to interpret and apply the law, or the limit or territory within which authority may be exercised. The codes listed describe the values used within the scope of AAMVAnet systems.
			territory within which authority may be exercised.
			'NM' New Mexico 'NV' Nevada 'NY' New York 'OH' Ohio 'OK' Oklahoma
			'OR' Oregon 'PA' Pennsylvania 'RI' Rhode Island 'SC' South Carolina
			'SD' South Dakota 'TN' Tennessee

Element Code	Business & Call List Names	Type /Len	Description & Values
			'TX' Texas
			'UT' Utah
			'VA' Virginia
			'VT' Vermont
			'WA' Washington
			'WI' Wisconsin
			'WV' West Virginia
			'WY' Wyoming
			'DS' U.S. Department of State
			US Territorial Possessions
			'AS' American Samoa
			'FM' Federal States of Micronesia
			'GU' Guam
			'MH' Marshal Islands
			'MP' Northern Mariana Islands
			'PW' Palau
			'PZ' Panamanian Canal Zone
			'PR' Puerto Rico
			'VI' Virgin Islands
			'WK' Wake Island
			Canada
			'AB' Alberta
			'BC' British Columbia
			'MB' Manitoba
			'NB' New Brunswick
			'NF' Newfoundland
			'NT' Northwest Territory
			'NS' Nova Scotia
			'ON' Ontario
			'PE' Prince Edward Island
			'QC' Quebec
			'SK' Saskatchewan
			'YT' Yukon Territory
			Mexico
			'MX' Mexico
GAPPID	APPLICATION ID	X(2)	The Application ID uniquely identifies an
	CLMF-CODE-NET-APPL-ID		application
			used by a site to exchange information with another
			site through AAMVAnet.
			EX: 01 for NDR, 02 for CDLIS
			VALUE MEANING/DESCRIPTION
			'01' NDR (RRS)
			'02' CDLIS
			'03' DLR
			'05' SR22/26
			'06' RRT

Element Code	Business & Call List Names	Type /Len	Description & Values
			'07' E/MCO '08' RLA '09' NRVC '10' ELT '11' NMVTIS '12' PDPS '13' BPEVR '14' CVIS '15' DVD '16' VI '17' SSOLV '99' IBM KIOSK
GAPPST	APPLICATION STATUS CLMF-CODE-APPL-STATUS	X(1)	The Application Status defines the status of an application. It must be filled in when responding to a message. VALUE MEANING/DESCRIPTION Outbound message default 0 Status Ok 1 Application inactive 2 Application invalid 3 Application security error 9 Application window close
GERAEN	ERROR AAMVAnet ELEMENT NUMBER CLMF-DESC-ERROR-ELEM-CODE	X(06)	The Error Element Code is the AAMVAnet code of the element in error in the message.
GERAET	AAMVAnet ERROR TYPE CLMF-DESC-ERROR-TYPE	X(01)	The type of error detected. VALUE MEANING/DESCRIPTION 1 Field (e.g., syntax) 2 Relationship (e.g., ELT requires VIN/lienhldr pair) 3 Processing (e.g., VIN OK, but wrong record) 4 System (e.g., Files not available)
GERDOC	ERROR DATA OCCURRENCE CLMF-DESC-ERROR-OCCURENCE	X(02)	When an element has multiple occurrences and some contain invalid values, this field points to the invalid occurrence.
GERMTX	ERROR MESSAGE TEXT CLMF-DESC-ERROR-TEXT	X(52)	The text that describes an error.
GLSEGI	LAST SEGMENT INDICATOR CLMF-INDC-NCB-LAST-SEG	X(1)	This indicator specifies whether or not this is the last segment for a message. Should the message be too large for one segment, it is split into multiple segments VALUE MEANING/DESCRIPTION Y Yes this is the last segment

Element Code	Business & Call List Names	Type /Len	Description & Values
			N No this is not the last segment
GMSCNT	MSG MATCH COUNT CLMF-CNT-MEC-MATCH	X(02)	This element represents the number of matches that were found for a given message. VALUE MEANING/DESCRIPTION
			NUMERIC VALUES WHEN PRESENT
GMSDAT	MESSAGE DATE CLMF-DATE-NCB-MSG	X(06)	This field represents the date that the message is sent. The format is YYMMDD.
GMSDST	MESSAGE DESTINATION CLMF-CODE-MSG-DEST	X(7)	This field contains the network ID of the destination.
			VALUE MEANING/DESCRIPTION N/A
GMSIND	MSG MATCH INDICATOR CLMF-INDC-MEC-MATCH	X(01)	This element indicates whether or not a match was found in the specified file.
			VALUE MEANING/DESCRIPTION ******* NMVTIS *******
			'Y' Yes, a match was found. 'N' No, a match was not found.
GMSLEI	MSG MATCH LIMIT EXCEEDED INDICATOR CLMF-INDC-MEC-MATCH-	X(01)	This element indicates whether the number of matches for a request exceeds the system threshold.
	LIMIT-EX		VALUE MEANING/DESCRIPTION 'Y' The maximum threshold of matches was exceeded.
			'N' The maximum threshold of matches was not exceeded.
GMSLEN	MESSAGE LENGTH CLMF-NUMB-NCB-MSG-LEN	X(4)	The Message Length specifies the length of the Network Message.
GMSLOC	MESSAGE LOCATOR/HEADER CLMF-DESC-MEC-MSG-LOCATOR	X(26)	This field contains information necessary to identify confirmations or responses to the originating message
GMSMSI	MSG MATCH SEQUENCE ID CLMF-NUMB-MEC-MATCH-SEQ- ID	X(02)	This element represents the match identifier of the pointer found at a central site or site of record. The match sequence ID is used for multiple responses to an inquiry. The first response contains '01', the second contains '02', etc. The same identifier is applied to all pointer messages for a particular match.
GMSORG	MESSAGE ORIGIN CLMF-CODE-ORIGIN	X(7)	This element contains the network id of the site from which the message was originally sent.
GMSORI	Nlets ORI Address CLMF-ORI-DESTINATION- ADDRESS	X(9)	The Originating Agency Identifier (ORI) describes the address of a Nlets user and is used by Nlets to route the message to the appropriate destination.

Business & Call List Names	Type /Len	Description & Values
		VALUE MEANING/DESCRIPTION xx = Line ORI xxLIC0000 = State registration agency xxVIN0000 = State registration agency xxSIR0000 = State identification bureau xxOLN0000 = State driving license bureau xxBAS0000 = State boat & snowmobile agency xxBOAT000 = State boat agency xxSNOW000 = State snowmobile agency xxaaabbcS = Hazardous materials access xxaaabbcS = Assigned by Nlets xxdddeeee = File ORIs, Nlets Help & Orion Directories NL0000000 = ORI of Nlets generated messages (errors) where xx = State or member code aaa = County bb = Agency c = open ddd = File record Type: LIC (registration) ADM (fedral agency) OLN (driver license) SIR (State criminal history) BAS (State boat & snowmobile) eeee = Action: HELP UPDT (update) CNCL (cancel) APNL (append)
MESSAGE SEQUENCE ID CLMF-DESC-NCB-MSG-SEQ-ID	X(4)	This field identifies the sequence of the message. It makes the messages unique to all other messages generated by the same originator in the same second.
MESSAGE TIME CLMF-TIME-NCB-MSG	X(6)	This field states the time the message is sent. The format is HHMMSS.
MESSAGE TYPE CLMF-CODE-MSG-TYPE	X(2)	The Message Type identifies the type of the message within an application. EX: IO for CDLIS search/inquiry.
NUMBER OF TEXT BLOCKS COUNT CLMF-CNT-NCB-NUM-TXT-BLKS	X(2)	This is a count of the number of text blocks contained in the text pool. It does NOT count the NCB block. For example if the message contains an NCB, a Message Exchange Control Block and a Vehicle Identification Block, this field will contain a value of '02'.
NCB ERROR CODE CLMF-CODE-NCB-ERROR	X(1)	The NCB Error Code is a flag to indicate whether an exception has occurred with a Network Message. VALUE MEANING/DESCRIPTION
	MESSAGE SEQUENCE ID CLMF-DESC-NCB-MSG-SEQ-ID MESSAGE TIME CLMF-TIME-NCB-MSG MESSAGE TYPE CLMF-CODE-MSG-TYPE NUMBER OF TEXT BLOCKS COUNT CLMF-CNT-NCB-NUM-TXT-BLKS	MESSAGE SEQUENCE ID CLMF-DESC-NCB-MSG-SEQ-ID MESSAGE TIME CLMF-TIME-NCB-MSG MESSAGE TYPE CLMF-CODE-MSG-TYPE NUMBER OF TEXT BLOCKS COUNT CLMF-CNT-NCB-NUM-TXT-BLKS NCB ERROR CODE X(1)

Element Code	Business & Call List Names	Type /Len	Description & Values
			N No error Y Error U Undeliverable
GNETSI	NETWORK SESSION INDICATOR CLMF-INDC-NET-SESSION	X(1)	This indicator specifies whether the message is sent through NCS. VALUE MEANING/DESCRIPTION Y Yes N No
GNETST	NETWORK STATUS CLMF-CODE-NET-STATUS	X(2)	This element contains the status of the network. This value is entered by NCS or by UNI. VALUE MEANING/DESCRIPTION Outbound message default 00 Status Ok 01 Destination inactive 02 Destination not registered 03 Destination not defined 04 Origin error 05 Message length error 98 Network window closed 99 Local network down
GPROST	PROCESSING STATUS CLMF-CODE-MEC-PROCESS- STATUS	X(2)	This field indicates the status of the transaction. A value of zero indicates that there is no error in the message. A value other than zero will indicate an invalid process (e.g. record not found, syntax error or any other application error). The non zero values are defined within a given application. VALUE MEANING/DESCRIPTION ********ALL APPLICATIONS************** '00' Processing successful ********CDLIS (02)***************** '01' Logic error (such as record not found) '02' System error (such as file off-line) '03' Syntax error (edit errors) '04' Security Exception '05' Confirmation of new SOR, but DHR not ready '06' Driver found, digital image date is available and will be faxed to the SOI '07' Driver found, but digital image data is not avail. ********SR22/SR26 (05) ************************************

Element Code	Business & Call List Names	Type /Len	Description & Values
Code		Lei	'04' Driver found; SR22/26 not pertinent; Record updated '05' Driver record found; SR22/26 is duplicate '06' Security violation (not authorized to send) '07' Insufficient identifiers; cannot search driver record ***** ELT, NMVTIS & BPEVR (10,11,13)******* '01' Processing was unsuccessful ***** 'DPS (12)****************** '01' Logic error (such as record not found) '02' System error (such as file off-line) '06' Driver found, digital image date is available and will be faxed to the SOI '07' Driver found, but digital image data is not avail.
GSGSEQ	SEGMENT SEQUENCE NUMBER CLMF-NUMB-NCB-SEG	X(2)	If a message is too large for one segment it is split into multiple segments. This element specifies which segment, in a possible series of segments, is current.
GTPIND	TEST/PRODUCTION INDICATOR CLMF-INDC-TST-PROD	X(1)	This indicator specifies whether to route the message to Test, Training or Production at the site. VALUE MEANING/DESCRIPTION T Test E Training P Production
GTRORG	TRANSACTION ORIGINATOR CLMF-CODE-NCB-TRANS- ORIGINATOR	X(7)	This element contains the network id of the site that originated the transaction.
GTXNPR	TRANSACTION CODE CLMF-DESC-NCB-TXN-PROG	X(4)	This data element defines a transaction code for NCS
GTXUNF	UNFORMATTED TEXT CLMF-TEXT-FREE-FORMAT	X(61)	This field contains free-formatted text as may be included in a response from NDR.
GXMODC	TRANSMIT MODE CODE CLMF-CODE-NCB-XMIT-MODE	X(1)	The Transmit Mode Code indicates the type of network service used during the transmission. VALUE MEANING/DESCRIPTION 1 NCS 2 Information Exchange 3 Batch
MMCCIT	CARRIER CITY BUSINESS ADDRESS CLMF-CARRIER-BUSINESS- CITY-ADD	X(25)	The Carrier's principal place of doing business. This is the actual city address of the business not the mailing city address.

Element Code	Business & Call List Names	Type /Len	Description & Values
MMCCN1	CARRIER BUSINESS COUNTY ADDRESS CLMF-CARRIER-BUSINESS- CNTY-ADD	X(3)	The Carrier's principal place of doing business. This is the actual county address of the business not the mailing county address.
MMCDDT	CARRIER US DOT NUMBER ISSUE DATE CLMF-USDOT-NUMBER-ISSUE- DATE	X(8)	The date on which a carriers US DOT number was issued, and added to the OMC system.
MMCDN1	CARRIER DOING BUSINESS AS NAME CLMF-CARRIER-DBA-NAME	X(55)	The Carrier's 'Doing Business As' name. A name, other than the legal name, that the carrier uses in commerce.
MMCDO1	CARRIER US DOT NUMBER CLMF-USDOT-NUMBER	X(7)	Carrier's identification number assigned by the U.S. Department of Transportation. This field is left justified or zero filled.
MMCENT	ENTITY TYPE OF USDOT HOLDER CLMF-USDOT-TYPE	X(1)	This field indicates the type of entity the of the USDOT Holders. VALUE MEANING/DESCRIPTION 'B' Both Carrier and Shipper 'C' Motor Carrier 'R' Registrant 'S' Shipper
MMCEZI	CARRIER EXPANDED ZIP BUSINESS ADDR CLMF-CARRIER-BUSINESS- XZIP-ADD	X(05)	The Carrier's principal place of doing business. This is the actual expanded ZIP address of the business not the mailing expanded ZIP address.
MMCHMI	CARRIER INTRASTATE HAZMAT IND CLMF-INTRASTATE-HAZMAT-IND	X(01)	'B' Intrastate HazMat Carrier '' Not an Intrastate HazMat Carrier
MMCICC	MOTOR CARRIER ICC NUMBER CLMF-MTC-ICC-NUMBER	X(6)	ICC number of the Motor Carrier.
MMCIII	CARRIER INTERSTATE OPERATION IND CLMF-INTERSTATE-OPER-IND	X(01)	'A' Interstate Carrier '' Not an Interstate Carrier
MMCLN1	CARRIER LEGAL NAME CLMF-CARRIER-LEG-NAME	X(55)	The Carrier's legal name.
MMCMCN	CARRIER MAILING COUNTY CODE CLMF-MC-MAIL-ADDR-COUNTY	X(3)	This is the county code of the carriers mailing address.
MMCMCT	MOTOR CARRIER MAILING CITY CLMF-MC-MAIL-ADDR-CITY	X(025)	The city where all credentials are sent. Many jurisdictions require a street address since

Element Code	Business & Call List Names	Type /Len	Description & Values
			plates are mailed by UPS and bulky items cannot be placed within the box. A post office box number can also be included for mailing invoices and other credentials.
MMCMSA	MOTOR CARRIER MAILING STREET ADDRESS CLMF-MC-MAIL-ADDR-STREET	X(030)	The address line 1 where all credentials are sent. Many jurisdictions require a street address since plates are mailed by UPS and bulky items cannot be placed within the box. A post office box number can also be included for mailing invoices and other credentials.
MMCMST	MOTOR CARRIER MAILING STATE CLMF-MC-MAIL-ADDR-STATE	X(02)	The State where all credentials are sent. Many jurisdictions require a street address since plates are mailed by UPS and bulky items cannot be placed within the box. A post office box number can also be included for mailing invoices and other credentials. VALUE MEANING/DESCRIPTION See Jurisdiction Code BJUTCD for the list of values.
MMCMZ1	MOTOR CARRIER MAILING ZIP CLMF-MC-MAIL-ADDR-ZIP	X(05)	The zipcode where all credentials are sent. Many jurisdictions require a street address since plates are mailed by UPS and bulky items cannot be placed within the box. A post office box number can also be included for mailing invoices and other credentials.
MMCMZ2	CARRIER EXPANDED ZIP MAILING ADDRESS CLMF-MC-MAIL-ADDR-XZIP	X(05)	The Carrier's mailing address expanded ZIP.
MMCNHI	CARRIER INTRASTATE NON HAZMAT IND CLMF-INTRASTATE- NONHAZMAT-IND	X(01)	'C' Intrastate Non-HazMat Carrer '' Not an Intrastate Non-HazMat Carrier
MMCPHN	MOTOR CARRIER TELEPHONE NUMBER CLMF-MC-PHONE	X(10)	The phone number of a motor carrier. The number has three separate parts: - First three digits are the area code - Next three digits are the exchange code - Next four digits are the line identifier
MMCSTA	CARRIER STREET BUSINESS ADDRESS CLMF-CARRIER-BUSINESS- STRT-ADD	X(30)	The Carrier's principal place of doing business. This is the actual street address of the business not the mailing street address.
MMCSTC	CARRIER STATE CODE BUSINESS ADDRESS CLMF-CARRIER-BUSINESS- STAT-ADD	X(02)	The Carrier's principal place of doing business. This is the actual State code address of the business not the mailing State code address. VALUE MEANING/DESCRIPTION See Jurisdiction Code BJUTCD for the list of values.

Element Code	Business & Call List Names	Type /Len	Description & Values
MMCSTS	MOTOR CARRIER STATUS CLMF-MC-STATUS	X(01)	An indicator that shows if a carrier is in business and is an authorized carrier. VALUE MEANING/DESCRIPTION 'A' Active 'I' Inactive 'P' Pending
MMCTIN	TAX IDENTIFICATION NUMBER (TIN) CLMF-TAX-ID-NUMBER	X(9)	A Social Security number or an Employer Identification number. The number is used by the IRS to identify a person or organization who files a tax return. VALUE MEANING/DESCRIPTION NUMERIC VALUES WHEN PRESENT
MMCTTY	TAX IDENTIFICATION (TIN) TYPE CLMF-TIN-TYPE-CODE	X	The indicator shows if the Tax Id is for an Individual with a Social Security number or an organization with an Employer Id number. VALUE MEANING/DESCRIPTION 'E' Federal Employer Identification Number 'S' Social Security Number 'U' Unknown
MMCVLI	CARRIER VEHICLE LIST INDICATOR CLMF-CAR-VEH-LIST-IND	X	Requests a list of vehicles assigned to the carrier. VALUE MEANING/DESCRIPTION 'Y' Vehicle List Requested '' No Vehicle List Required
MMCZIP	CARRIER ZIP BUSINESS ADDRESS CLMF-CARRIER-BUSINESS- ZIP-ADD	X(05)	The Carrier's principal place of doing business. This is the actual ZIP address of the business not the mailing ZIP address.
MRFCCD	CVIS CARRIER FILE CREATE DATE CLMF-CAR-FILE-CREATE-DATE	X(8)	The date shows the date Carrier file was created. VALUE MEANING/DESCRIPTION Date in form CCYYMMDD.
MRFCHD	CVIS CARRIER TARGET DATE CLMF-CAR-TARGET-DATE	X(8)	The date of the current value of the Carrier Target Indicator. VALUE MEANING/DESCRIPTION Date in form CCYYMMDD.
MRFCTH	CVIS CARRIER TARGET INDICATOR CLMF-CAR-TARGET-IND	X	The indicator reveals whether the carrier record is currently a Target record. VALUE MEANING/DESCRIPTION 'T' Target

Element Code	Business & Call List Names	Type /Len	Description & Values
MRFFTP	PRISM FILE TYPE NONE	X	The File Type indicates what kind of file is being processed. VALUE MEANING/DESCRIPTION 'T' Target 'C' Census or Carrier 'V' Vehicle
MRFMCD	MCMIS RECORD CREATE DATE CLMF-MCMIS-FILE-CREATE- DATE	X(8)	The date on which a record in the MCMIS file was created. Records are added when a file from OMC is transmitted, so to date also represents the OMC MCMIS file create date. The dates format is CCYYMMDD.
MRFMLU	CVIS MCMIS DATE OF LAST UPDATE CLMF-MCMIS-DATE-LAST- UPDATE	X(8)	The date shows the date of the last update for the MCMIS record. VALUE MEANING/DESCRIPTION Date in form CCYYMMDD.
MRFMUS	CVIS MCMIS USER ID OF LAST UPDATE CLMF-MCMIS-USER-ID	X(8)	The User Identification of the person who made the last update on the MCMIS file.
MRFNAZ	PRISM NAME ALPHABETIZER CLMF-PRISM-NAME-ALPHAZIER	X(17)	A name in coded form, used for search purposes.
MRFRTP	PRISM RECORD TYPE NONE	X	The Record Type indicates what kind of record is being processed. VALUE MEANING/DESCRIPTION 'C' Carrier 'V' Vehicle
MRFVCD	CVIS VEHICLE FILE CREATE DATE CLMF-VEH-FILE-CREATE-DATE	X(8)	The date shows the date Vehicle file was created. VALUE MEANING/DESCRIPTION Date in form CCYYMMDD.
MRFVHD	CVIS VEHICLE TARGET DATE CLMF-VEH-TARGET-DATE	X(8)	The date of the current value of the Vehicle Target Indicator. VALUE MEANING/DESCRIPTION Date in form CCYYMMDD.
MRFVTH	CVIS VEHICLE TARGET INDICATOR CLMF-VEH-TARGET-IND	X	The indicator reveals whether the vehicle record is currently a Target record. VALUE MEANING/DESCRIPTION 'T' Target
MSFSDA	CARRIER MCSIP STEP DATE CLMF-MCSIP-STEP-DATE	X(8)	The date of the MCSIP Step.

Element Code	Business & Call List Names	Type /Len	Description & Values
		7202	VALUE MEANING/DESCRIPTION Date in form CCYYMMDD.
MSFSSD	SAFESTAT INDICATOR DATE CLMF-SAFESTAT-SCORE-DATE	X(8)	The date that a SafeStat Indicator is assigned by the SafeStat system.
MSFSSS	SAFESTAT INDICATOR CLMF-SAFESTAT-SCORE	9(3)	An indicator assigned by the SafeState System.
MSFSTP	MCSIP STEP CLMF-MCSIP-STEP	XX	The phase of the MCSIP that the carrier is assigned to. A Safety Performance Monitoring Check based on the SafeStat Indicator.
VRGDEF	REGISTRATION EFFECTIVE DATE CLMF-REG-EFFECTIVE-DATE	X(08)	The date the current registration became effective (this may not be the original registration date). Format is CCYYMMDD.
VRGDEX	REGISTRATION EXPIRATION DATE CLMF-REG-EXPIRE-DATE	X(08)	The date the current registration expires. Format is CCYYMMDD.
VRGJUR	REGISTRATION JURISDICTION CLMF-REG-JURIS	XX	The U.S. Postal code or the code for Canada or Mexico for the jurisdiction that registered the vehicle or vessel. VALUE MEANING/DESCRIPTION See Jurisdiction Code BJUCDE for the list of values.
VRGPLN	PLATE NUMBER CLMF-REG-PLATE-NUM	X(10)	The characters assigned to a registration plate or tag affixed to the vehicle, assigned by the jurisdiction. VALUE MEANING/DESCRIPTION Patterns defined by each jurisdiction
VRGPLT	REGISTRATION PLATE TYPE CLMF-REG-PLATE-TYPE	X(3)	The coded specification of vehicle use and registration classification. Codes are found in the NCIC Code Manual, 1994.
VRGREY	REGISTRATION RENEWED EFFECTIVE YEAR CLMF-REG-RENEW-EFFECTIVE- YEAR	9(02)	The year the registration was renewed, ie. 95, 96.
VVHMAK	VEHICLE/VESSEL MAKE CLMF-VEH-MAKE	X(4)	The distinctive (coded) name applied to a group of vehicles or vessels by a manufacturer. Codes are found in the NCIC Code Manual, 1994. VALUE MEANING/DESCRIPTION See NCIC code definition. If no value is supplied it will be filled with the value "UNKN" in PRISM files.
VVHMYE	VEHICLE/VESSEL MODEL YEAR CLMF-VEH-MODEL-YR	X(4)	The year which is assigned to a vehicle or vessel by the manufacturer. Format is CCYY.

Element Code	Business & Call List Names	Type /Len	Description & Values
VVHVIN	VEHICLE IDENTIFICATION NUMBER CLMF-VEHICLE-VIN-NUMBER	X(17)	A unique combination of alphanumeric characters that identifies a specific vehicle or component. The VIN is affixed to the vehicle in specific locations and formulated by the manufacturer. State agencies under some controlled instances may assign a VIN to a vehicle. This field is left justified and represents the format for VINs created subject to the 1982 17-character format. There should be no dashes contained within the VIN number for any records submitted via PRISM Vehicle File. VALUE MEANING/DESCRIPTION reference VINA

Supplemental Data Dictionary

Note: 'Column' in the Description & Values Section denotes MCS-150 File layout column

PRISM	•	Type	
Code	Data Element Name	/Len	Description & Values
MMCPHN	Office Telephone Number	AN 10	[COLUMN 466-475] Telephone number for the carrier
X150DT	The Year of the Mileage	N - 4	[COLUMN 649-652] The year that the mileage on the MCS-150 was accumulated
X150LU	MCS-150 Last Update Date	N - 8	Date of last update to the carrier record in the MCS-150 file.
XCLASS	Classification	A - 12	[COLUMN 653-664] Identifies the type of entity. MCMIS
			recognizes the following classifications for entity type
			(NOTE: An entity can have more than one type of
			classification. A letter will appear in all those fields
			representing classifications that apply):
			A = Authorized-For-Hire. A commercial entity whose
			primary business activity is the transportation of
			property/passengers by motor vehicle for compensation. B = Exempt-For-Hire. A for-hire entity transporting
			commodities or conducting operations not subject to
			economic regulation by the Interstate Commerce
			Commission.
			C = Private (property). An entity whose highway
			transportation activities are incidental to, and in
			furtherance of, its primary business activity.
			D = Private/Passenger Business. A private entity engaged
			in the interstate transportation of passengers which is
			provided in the furtherance of a commercial enterprise and
			is not available to the public at large. E = Private/Passenger Non-Business. A private entity
			involved in the interstate transportation of passengers that
			does not otherwise meet the definition of a private entity
			transporting passengers (business) (e.g., church buses).
			F = Migrant. An entity who transports in interstate or
			foreign commerce at any one time, three or more migrant
			workers to or from their employment (refers to "contract
			carrier by motor vehicle").
			G = U.S. Mail. A entity which transports U.S. Mail.
			H = Federal Govt. Transportation of property or
			passengers by a U.S. Federal Government agency. I - State Govt. Transportation of property or passengers by
			a U.S. State Government agency.
			J = Local Govt. Transportation of property or passengers
			by a local municipality.
			K = Indian Tribe. Transportation of property or passengers
			by an Indian tribal government.
			L = Other Classification. An entity which does not fall into
			one of the classifications above.
XCLOTH	Classification Other Defined	A - 50	[COLUMN 665-714] Other Defined. Identifies other classification.
XCREP1	Company Representative 1	A/N	[COLUMN 1145-1264] Company Representative 1
		120	
XCREP2	Company Representative 2	A/N 120	[COLUMN 1265-1384] Company Representative 2
XDBNUM	Dun & Bradstreet Number	AN 9	[COLUMN 526-534 The Dun & Bradstreet Number of the

PRISM Code	Data Element Name	Type /Len	Description & Values
Couc	Duta Element Tune	/Len	carrier
XDGTOT	Drivers Grand Total /Interstate &		[COLUMN 1112-1116] Total number of drivers hired to
	Intrastate		drive interstate and intrastate.
XDINTB	Drivers Interstate/beyond 100 miles		[COLUMN 1122-1126] Identifies the number of drivers
			hired by the entity to drive interstate beyond 100 mile
			radius.
XDINTI	Drivers Interstate/within 100 miles	N 5	[COLUMN 1102-1106] Identifies the number of drivers
			hired by the entity to drive interstate within 100 mile
			radius.
XDOTRE	USDOT Revoked Flag	A/N 1	[COLUMN 1132-1132] A flag indicating whether the
			USDOT Number is revoked. Valid values are "Y" or "N"
XDOTRN	USDOT Revoked Number	N 12	[COLUMN 1133-1134] The USDOT Number, if revoked
XDRCDL	Drivers/Total With Commercial		[COLUMN 1117-1121] Total Number of drivers with a
	Drivers License		commercial drivers license
XDRTAB	Drivers Intrastate/beyond 100 miles		[COLUMN 1127-1131] Identifies the number of drivers
			hired by the entity to drive intrastate beyond 100 mile
XDTRAI	D I do		radius.
XDIRAI	Drivers Intrastate/within 100 miles		[COLUMN 1107-1111] Identifies the number of drivers hired by the entity to drive intrastate within 100 mile
			radius.
XEMAIL	Email Address	AN-80	[COLUMN 553-632] The email address of the carrier.
XFAXPH	Office Fax Phone Number	AN 10	[COLUMN 486-495] The entity's fax number at the
741 74241 11	office Lax Lilone Tvainoer	71110	principal place of business.
XGNDEF	Cargo Transported/Other Defined	AN-50	[COLUMN 745-794] Identifies the type of cargo
			when 'Other' is selected as cargo classification.
XGNFRT	Cargo Transported/General Freight	A - 30	[COLUMN 715-744] Identifies the type of cargo transported by
			the entity. MCMIS recognizes the following cargo types (NOTE:
			An entity can transport more than one type of cargo). The letter
			"X" will appear in all those fields representing cargo that apply: TYPE
			A. General Freight (XGNFRT)
			B. Household Goods (XGNHSG)
			C. Metal; Sheets, Coils, Rolls (XGNMET)
			D. Motor Vehicles (XGNMOV) E. Drive Away/Towaway (XGNDRV)
			F. Logs, Poles, Beams, Lumber (XGNPOL)
			G. Building Materials (XGNMAT)
			H. Mobile Homes (XGNMOB)
			I. Machinery, Large Objects (XGNMAC) J. Fresh Produce (XGNPRO)
			K. Liquids/Gases (XGNLIQ)
			L. Intermodal Containers (XGNINT)
			M. Passengers (XGNPAX)
			N. Oilfield Equipment (XGNOIL)
			O. Livestock (XGNLIV) P. Grain, Feed, Hay (XGNHAY)
		1	Q. Coal, Coke (XGNCOL)
		1	R. Meat (XGNMEA)
		1	S. Garbage, Refuse, Trash (XGNGAR)
		1	T. U.S. Mail (XGNUSM) U. Chemicals (XGNCHE)
			V. Commodities Dry Bulk (XGNDRY)
			W. Refrigerated Food (XGNREF)
			X. Beverages (XGNBEV)
			Y. Paper Products (XGNPAP)

PRISM		Type	5
Code	Data Element Name	/Len	Description & Values
			Z. Utility (XGNUTL)
			AA. Farm Supplies (XGNFAR) BB. Construction (XGNCON)
			CC. Water - Well (XGNWAT)
			DD. Other (XGNOTH)
XHCDVA	Hazardous Materials Carried	A – 41	[COLUMN 795-835] Identifies the type of hazardous materials
	The state of the s		carried by the entity. An entry in the field indicates the hazardous material is carried. Entries may be: "N" = Non Bulk;
			"B" = Bulk; "A" = All (both Bulk and Non Bulk). A: Division 1.1 (XHCDVA)
			B: Division 1.2 (XHCDVB)
			C: Division 1.3 (XHCDVC)
			D: Division 1.4 (XHCDVD)
			E: Division 1.5 (XHCDVE)
			F: Division 1.6 (XHCDVF)
			G: Division 2.1 (XHCDVG)
			H: Division 2.1LPG (XHCDVH)
			I: Division 2.1(METHANE) (XHCDVI)
			J: Division 2.2 (XHCDVJ)
			K: Division 2.2A (AMMONIA) (XHCDVK) Filler 4
			L: Division 2.3A (XHCDVL)
			M: Division 2.3B (XHCDVM)
			N: Division 2.3C (XHCDVN)
			O: Division 2.3D (XHCDVO)
			P: Class 3 (XHCDVP)
			Q: Class 3A (XHCDVQ)
			R: Clas 3B (XHCDVR)
			S: Comb Liquid (XHCDVS)
			T: Division 4.1 (XHCDVT)
			U: Division 4.2 (XHCDVU)
			V: Division 4.3 (XHCDVV)
			W: Division 5.1 (XHCDVW)
			X: Division 5.2 (XHCDVX)
			Y: Division 6.2 (XHCDVY) Z: Division 6.1A (XHCDVZ)
			AA: Division 6.1B (XHCDAA)
			BB: Division 6.1 POISON (XHCDBB)
			CC: Division 6.1Solid (XHCDCC)
			DD: Class 7 (XHCDDD)
			EE: HWY Route CNTR QY (XHCDEE)
			FF: Class 8 (XHCDFF)
			GG: Class 8A (XHCDGG)
			HH: Class 8B (XHCDHH)
			II: Class 9 (XHCDII)
			JJ: Elevated Temp Mat (XHCDJJ)
			KK: Infectious Waste (XHCDKK) LL: Marine Pollutant (XHCDLL)
			MM: Hazardous Sub (RQ) (XHCDMM)
			NN: Hazardous Sub (KQ) (XTCDNN)
			OO: ORM (XHCDOO)
XHSDVA	Hazardous Materials Shipped	A – 41	[COLUMN 836-876] Identifies the type of hazardous materials
			shipped by the entity. An entry in the field indicates the
			hazardous material is shipped. Entries may be: "N" = Non Bulk;
			"B" = Bulk; "A" = All (both Bulk and Non Bulk).
			A: Division 1.1 (XHSDVA)
			B: Division 1.2 (XHSDVB)
			C: Division 1.3 (XHSDVC)
			D: Division 1.4 (XHSDVD)

PRISM		Type	
Code	Data Element Name	/Len	Description & Values
			E: Division 1.5 (XHSDVE)
			F: Division 1.6 (XHSDVF)
			G: Division 2.1 (XHSDVG)
			H: Division 2.1LPG (XHSDVH)
			I: Division 2.1(METHANE) (XHSDVI)
			J: Division 2.2 (XHSDVJ)
			K: Division 2.2A (AMMONIA) (XHSDVK) Filler 4
			L: Division 2.3A (XHSDVL)
			M: Division 2.3B (XHSDVM)
			N: Division 2.3C (XHSDVN)
			O: Division 2.3D (XHSDVO)
			P: Class 3 (XHSDVP)
			Q: Class 3A (XHSDVQ)
			R: Class 3B (XHSDVR)
			S: Comb Liquid (XHSDVS)
			T: Division 4.1 (XHSDVT)
			U: Division 4.2 (XHSDVU) V: Division 4.3 (XHSDVV)
			W: Division 5.1 (XHSDVW)
			X: Division 5.2 (XHSDVX)
			Y: Division 6.2 (XHSDVY)
			Z: Division 6.1A (XHSDVZ)
			AA: Division 6.1B (XHSDAA)
			BB: Division 6.1 POISON (XHSDBB)
			CC: Division 6.1Solid (XHSDCC)
			DD: Class 7 (XHSDDD)
			EE: HWY Route CNTR QY (XHSDEE)
			FF: Class 8 (XHSDFF)
			GG: Class 8A (XHSDGG)
			HH: Class 8B (XHSDHH) II: Class 9 (XHSDII)
			JJ: Elevated Temp Mat (XHSDJJ)
			KK: Infectious Waste (XHSDKK)
			LL: Marine Pollutant (XHSDLL)
			MM: Hazardous Sub (RQ) (XHSDMM
			NN: Hazardous Waste (XHSDNN)
			OO: ORM (XHSDOO)
XLEAHK	Equipment Units Term Leased	A/N 5	[COLUMN 967-971] Identifies the number of Hazardous
	/Hazardous Material Tank Trucks		Material Tank Trucks Term Leased by the entity
XLEAHT	Equipment Units Term Leased	A/N 5	[COLUMN 972-976] Identifies the number of Hazardous
W E 1 1 6	/Hazardous Materials Tank Trailers	107.5	Material Tank Trailers Term Leased by the entity
XLEAMB	Equipment Units Term Leased /Mini-	A/N 5	[COLUMN 997-1001] Identifies the number of Mini
MENMO	bus	A /D.T. //	Buses Term Leased by the entity
XLEAMC	Equipment Units Term Leased /Motor Coaches	A/N 5	[COLUMN 977-981] Identifies the number of Motor
ZI E A TIZ		A /NT 5	Coaches Term Leased by the entity
XLEATK	Equipment Units Term Leased/Truck	A/N 5	[COLUMN 952-956] Identifies the number of Trucks
VIEATI	Equipment Unite Term Leased	A /NT 5	Term Leased by the entity. [COLUMN 962-966] Identifies the number of Trailers
XLEATL	Equipment Units Term Leased /Trailers	A/N 5	Term Leased by the entity
XLEATS	Equipment Units Term Leased	A/N 5	[COLUMN 957-961] Identifies the number of Tractors
	/Tractors		Term Leased by the entity
XLEAV1	Equipment Units Term Leased /Van	A/N 5	[COLUMN 1002-1006] Identifies the number of Vans
	1-8		with 1-9 capacity Term Leased by the entity
XLEAV9	Equipment Units Term Leased /Van	A/N 5	[COLUMN 1007-1011] Identifies the number of Vans
	9-16		with 9-16 capacity Term Leased by the entity

PRISM		Type	
Code	Data Element Name	/Len	Description & Values
XLEB1	Equipment Units Term Leased /School Buses 1-8	A/N 5	[COLUMN 982-986] Identifies the number of School Buses with 1-8 capacity Term Leased by the entity
XLEB16	Equipment Units Term Leased	A/N 5	[COLUMN 992-996] Identifies the number of School
	/School Buses 16+		Buses with 16+ capacity Term Leased by the entity
XLEB9	Equipment Units Term Leased	A/N 5	[COLUMN 987-991] Identifies the number of School
	/School Buses 9-15		Buses with 9-15 capacity Term Leased by the entity
XLEL1	Equipment Units Term Leased	A/N 5	[COLUMN 1012-1016] Identifies the number of
	/Limousines 1-8		Limousines with 1-8 capacity Term Leased by the entity
XLEL9	Equipment Units Term Leased	A/N 5	[COLUMN 1017-1021] Identifies the number of
	/Limousines 9-15		Limousines with 9-15 capacity Term Leased by the entity
XLELI6	Equipment Units Term Leased	A/N 5	[COLUMN 1022-1026] Identifies the number of
	/Limousines 16+		Limousines with 16+ capacity Term Leased by the entity
XMADDZ	Mailing Address/Zip Code	AN –	[COLUMN 397-406] See XPADDZ – Physical
		10	Address/Zip Code
XMCCPH	Cellular Telephone Number	AN 10	[COLUMN 476-485] Cellular telephone number for the carrier
XMCDN1	Carrier "Doing Business As" Name	AN/	[COLUMN 122-241] The Carrier's 'Doing Business As'
		120	name. A name, other than the legal name, that the carrier
			uses in commerce.
XMCDO1	US DOT Number of the Carrier	N 12	[COLUMN 496-507] The USDOT Number of the carrier
XMCFEI	Federal Employer Identification	N 9	[COLUMN 544-522] Federal Employer Identification
	Number		Number
XMCLN1	Carrier Legal Name	AN/ 120	[COLUMN 2-121] The Carrier's legal name.
XMCMSA	Carrier Street/ Mailing Address	AN	[COLUMN 354-403 The address line 1 where all
	_	(50)	credentials are sent. Many jurisdictions require a street
			address since plates are mailed by UPS and bulky items
			cannot be placed within the box. A post office box
			number can also be included for mailing invoices and other
XMCPFG	MCCID Ela a	A/1	credentials.
XMCPFG	MCSIP Flag	A/1	The MCSIP Flag shows whether the carrier is targeted. Value Meaning/Description
			"C" Targeted
XMCSSN	Social Security Number	N 9	[COLUMN 535-543] Social Security Number
XMCSTA	Carrier Street/ Business Address	AN 50	[COLUMN 242-291] The Carrier's principal place of
AMCSTA	Carrier Street Business Address	AN JU	doing business. This is the actual street address of the
			business not the mailing street address.
XMEXMA	Mexican Neighborhood/Mailing	AN 25	[COLUMN 441-465] The name or description of the
			Mexican Neighborhood.
XMEXPH	Mexican Neighborhood/Physical	AN 25	[COLUMN 329-353] The name or description of the
			Mexican Neighborhood.
XMILYR	Mileage/Calendar Year/MCS-150	N - 10	[COLUMN 639-648] The number of miles reported by the entity
			on the Form MCS-150.
XOWL9	Equipment Units Owned/Limousines 9-15	A/N 5	[COLUMN 942-946] Identifies the number of Limousines with 9-15 capacity owned by the entity
XOWLI	Equipment Units Owned/Limousines	A/N 5	[COLUMN 937-941] Identifies the number of Limousines
	1-8	11115	with 1-8 capacity owned by the entity
XOWLI6	Equipment Units Owned/Limousines	A/N 5	[COLUMN 947-951] Identifies the number of Limousines
110 ((L10	16+	11115	with 16+ capacity owned by the entity
XOWNHK	Equipment Units Owned/Hazardous	A/N 5	[COLUMN 892-896] Identifies the number of Hazardous
210 ((1)1111	Material Tank Trucks	11113	Material Tank Trucks owned by the entity
	Material Lank Liners	ı	inactial falls flucts owned by the chilty

PRISM		Type	
Code	Data Element Name	/Len	Description & Values
XOWNHT	Equipment Units Owned/Hazardous	A/N 5	[COLUMN 897-901] Identifies the number of Hazardous
	Materials Tank Trailers		Material Tank Trailers owned by the entity
XOWNMB	Equipment Units Owned/Mini-bus	A/N 5	[COLUMN 922-926] Identifies the number of Mini Buses
			owned by the entity
XOWNMC	Equipment Units Owned/Motor	A/N 5	[COLUMN 902-906] Identifies the number of Motor
	Coaches		Coaches owned by the entity
XOWNTK	Equipment Units Owned/Truck	A/N 5	[COLUMN 877-881] Identifies the number of Trucks
			owned by the entity.
XOWNTL	Equipment Units Owned/Trailers	A/N 5	[COLUMN 887-891] Identifies the number of Trailers
			owned by the entity
XOWNTS	Equipment Units Owned/Tractors	A/N 5	[COLUMN 882-886] Identifies the number of Tractors
			owned by the entity
XOWNV1	Equipment Units Owned/Van 1-8	A/N 5	[COLUMN 927-931] Identifies the number of Vans with
			1-9 capacity owned by the entity
XOWNV9	Equipment Units Owned/Van 9-16	A/N 5	[COLUMN 932-936] Identifies the number of Vans with
			9-16 capacity owned by the entity
XOWSB1	Equipment Units Owned/School	A/N 5	[COLUMN 907-911] Identifies the number of School
	Buses 1-8		Buses with 1-8 capacity owned by the entity
XOWSB16+	Equipment Units Owned/School	A/N 5	[COLUMN 917-921] Identifies the number of School
	Buses 16+		Buses with 16+ capacity owned by the entity
XOWSB9	Equipment Units Owned/School	A/N 5	[COLUMN 912-916] Identifies the number of School
	Buses 9-15		Buses with 9-15 capacity owned by the entity
XPADDS	Physical Address/State Code	AN-2	[COLUMN 264-265] See Attachment 1
XPADDS	Mailing Address/State Code	A - 2	[COLUMN 395-396] See Attachment 1
XPADDZ	Physical Address/ Zip Code	AN-	[COLUMN 266-275] Zip code that corresponds to the
		10	street address of the principal place of business (Any valid
			U.S. or Canadian zip code or CANADA; MEXICO or
			CENTRA). Example 37815-0310. If the expanded zip
			code is known, the field will contain the dash (-). Some
			Canadian and Mexican addresses contain the word
			CANADA or MEXICO as part of the zip code and Central
			American countries' zip codes contain CENTRA.
XSHPHM	Operation/Shipper/Intrastate	A - 1	[COLUMN 637] It identifies the shipper as being engaged
			in intrastate shipping activities. A letter will appear
			representing operations that apply.
XSHPIN	Operation/Shipper/Interstate	A - 1	[COLUMN 636] It identifies the shipper as being engaged
			in interstate shipping activities. A letter will appear
			representing operations that apply.
XTLL1	Equipment Units Trip Leased	A/N 5	[COLUMN 1087-1091] Identifies the number of
	/Limousines 1-8		Limousines with 1-8 capacity Trip Leased by the entity
XTLL9	Equipment Units Trip Leased	A/N 5	[COLUMN 1092-1096] Identifies the number of
	/Limousines 9-15		Limousines with 9-15 capacity Trip Leased by the entity
XTLLI6	Equipment Units Trip Leased	A/N 5	[COLUMN 1097-1101] Identifies the number of
	/Limousines 16+		Limousines with 16+ capacity Trip Leased by the entity
XTLS1	Equipment Units Trip Leased /School	A/N 5	[COLUMN 1057-1061] Identifies the number of School
	Buses 1-8		Buses with 1-8 capacity Trip Leased by the entity
XTLS16	Equipment Units Trip Leased /School	A/N 5	[COLUMN 1067-1071] Identifies the number of School
	Buses 16+		Buses with 16+ capacity Trip Leased by the entity
XTLS9	Equipment Units Trip Leased /School	A/N 5	[COLUMN 1062-1066] Identifies the number of School
	Buses 9-15		Buses with 9-15 capacity Trip Leased by the entity
XTLV1	Equipment Units Trip Leased /Van 1-	A/N 5	[COLUMN 1077-1081] Identifies the number of Vans

PRISM		Type	
Code	Data Element Name	/Len	Description & Values
	8		with 1-9 capacity Trip Leased by the entity
XTLV9	Equipment Units Trip Leased /Van 9-16	A/N 5	[COLUMN 1082-1086] Identifies the number of Vans with 9-16 capacity Trip Leased by the entity
XTRLHK	Equipment Units Trip Leased /Hazardous Material Tank Trucks	A/N 5	[COLUMN 1042-1046] Identifies the number of Hazardous Material Tank Trucks Trip Leased by the entity
XTRLHT	Equipment Units Trip Leased /Hazardous Materials Tank Trailers	A/N 5	[COLUMN 1047-1051] Identifies the number of Hazardous Material Tank Trailers Trip Leased by the entity
XTRLMB	Equipment Units Trip Leased /Minibus	A/N 5	[COLUMN 1072-1076] Identifies the number of Mini Buses Trip Leased by the entity
XTRLMC	Equipment Units Trip Leased /Motor Coaches	A/N 5	[COLUMN 1052-1056] Identifies the number of Motor Coaches Trip Leased by the entity
XTRLTK	Equipment Units Trip Leased/Truck	A/N 5	[COLUMN 1027-1031] Identifies the number of Trucks Trip Leased by the entity.
XTRLTL	Equipment Units Trip Leased /Trailers	A/N 5	[COLUMN 1037-1041] Identifies the number of Trailers Trip Leased by the entity
XTRLTS	Equipment Units Trip Leased /Tractors	A/N 5	[COLUMN 1032-1036] Identifies the number of Tractors Trip Leased by the entity
XVEHRG	Vehicle Registrant	A - 1	[COLUMN 638] Vehicle Registrant

ATTACHMENT 1 – State Code (XPADDS)

U.S.A.

State Code	State	State Code	State
AL	ALABAMA	NC	NORTH CAROLINA
AK	ALASKA	ND	NORTH DAKOTA
AR	ARKANSAS	NE	NEBRASKA
AZ	ARIZONA	NH	NEW HAMPSHIRE
CA	CALIFORNIA	NJ	NEW JERSEY
CO	COLORADO	NM	NEW MEXICO
CT	CONNECTICUT	NV	NEVADA
DC	DISTRICT OF COLUMBIA	NY	NEW YORK
DE	DELAWARE	ОН	OHIO
FL	FLORIDA	OK	OKLAHOMA
GA	GEORGIA	OR	OREGON
HI	HAWAII	PA	PENNSYLVANIA
IA	IOWA	RI	RHODE ISLAND
ID	IDAHO	SC	SOUTH CAROLINA
IL	ILLINOIS	SD	SOUTH DAKOTA
IN	INDIANA	TN	TENNESSEE
KS	KANSAS	TX	TEXAS
KY	KENTUCKY	UT	UTAH
LA	LOUISIANA	VA	VIRGINIA
MA	MASSACHUSETTS	VT	VERMONT
MD	MARYLAND	WA	WASHINGTON
ME	MAINE	WI	WISCONSIN
MI	MICHIGAN	WV	WEST VIRGINIA
MN	MINNESOTA	WY	WYOMING
MO	MISSOURI	OT	OTHER
MS	MISSISSIPPI	UK	UNKNOWN
MT	MONTANA	ZZ	UNKNOWN

AMERICAN POSSESSIONS OR PROTECTORATES

State Code	State	State Code	State
AS	AMERICAN SAMOA	PR	PUERTO RICO
GU	GUAM	VI	VIRGIN ISLANDS

CENTRAL AMERICAN COUNTRIES

Country Code	Country	Country Code	Country
BZ	BELIZE	GT	GUATEMALA
CR	COSTA RICA	НО	HONDURAS
CZ	CANAL ZONE	NI	NICARAGUA
ES	EL SALVADOR	PN	PANAMA

CANADA

Province Code	Province	Province Code	Province
AB	ALBERTA	NT	NORTHWEST TERRITORY
BC	BRITISH COLUMBIA	ON	ONTARIO
MB	MANITOBA	PE	PRINCE EDWARD ISLAND
NB	NEW BRUNSWICK	QC	PROVINCE OF QUEBEC
NF	NEWFOUNDLAND	SK	SASKATCHEWAN
NS	NOVA SCOTIA	YT	YUKON TERRITORY

MEXICO

State Code	State	State Code	State
AG	AGUASCALIENTES	MX	MEXICO
BN	BAJA CALIFORNIA NORTE	NA	NAYARIT
BS	BAJA CALIFORNIA SUR	NL	NUEVO LEON
CH	COAHUILA	OA	OAXACA
CI	CHIHUAHUA	PU	PUEBLA
CL	COLIMA	QE	QUERETARO
CP	CAMPECHE	QI	QUINTANA ROO
CS	CHIAPAS	SI	SINALOA
DF	DISTRICTO FEDERAL	SL	SAN LUIS POTOSI
DG	DURANGO	SO	SONORA
GE	GUERRERO	TA	TAMAULIPAS
GJ	GUANAJUATO	TB	TABASCO
HD	HIDALGO	TL	TLAXCALA
JA	JALISCO	VC	VERACRUZ
MC	MICHOACAN	YU	YUCATAN
MR	MORELOS	ZA	ZACATECAS

ATTACHMENT 2 – Reasons for Add/Change

Change Code	Description	Change Code	Description
137	Description of Motor Carrier Operation	M63	Federal Vehicle Inspection Report
150	Motor Carrier Identification Report	MAT	Matrix (SR/CR)
151	Carrier/Shipper Identification Report	MER	Merger
50B	Bus Accident Report Form	MIL	Mileage (SR/CR)
50T	Truck Accident Report Form	ML1	Commercial Drivers License Mail-out 1, 1990
ACC	Preventable Accident Data (SR/CR)	ML2	Commercial Drivers License Mail-out 2, 1991
ATA	American Trucking Association	ML3	On-Guard Mail-out 3,1991
BRO	Broker	ML4	Anti-Drug Information Center (ADIC) Mail-out 4, 1993
CDL	Commercial Driver License	ML5	ICC (NTSB Project - 5, 1992)
CLT	Category C - Safety Status Letter	ML6	Driver Waiver Poster Relating to Diabetic Drivers
CEN	Census Cleanup Project	ML7	On-Guard (Notice to Steel Transporters)
CNL	Carrier Notification Letter	ML8	On-Guard (Trucks & Tractors avoid the headlines)
COR	Error/Correction made to Record (<u>TYPED</u> <u>ERROR</u>)	ML9	On-Guard Notice-Stability Problems for Cargo Tanks
CR1	Compliance Review	NLA	National Limousine Association
CVI	Commercial Vehicle Information System - Project	OOB	Out of Business
DOD	Department of Defense	OP1	Motor Carrier Authority Form OTH - Other
DUP	Duplicate Entry	OTH	Other (use only if no other code is available)
DRP	Duplicate Record Processing	PAR	Parts Reviewed (SR/CR)
ETA	Emergency Temporary Authority Application	PCS	Passenger Carrier Study (NTSB/ICC)
ENF	Enforcement Upload	PCU	Post Card Update Project
FAC	Rating Factors Changed (CR)	RP1	Return to Pool Letter 1
FRC	FMCSA Field Office Requested Safety Rating Change (SR/CR)	RP2	Return to Pool Letter 2
HRC	Federal Programs Requested Safety Rating Change (SR/CR)	RPT	Continue Monitoring Letter
ICC	Interstate Commerce Commission	SAF	SAFETYNET Accident Report
ICP	Intrastate Carriers Project	SCR	State Citation Forms
IMX	ICC (Mexican Carriers)	SID	Safestat ID
INH	Intrastate Non-Hazardous Materials	SMO	Safestat Monitoring
LAP	Laptop Upload	SFN	SAFETYNET Inspection Report
LID	License & Insurance Division (Former ICC)	SFR	SAFER
LTR	Letter	SR1	Safety Review
M11	PRISM (Formerly CVIS) Mail-out, Carrier Notification Letter	SRL	Safety Rating Letter
M12	Drug Test Random Sampling Mail-out - 1994	SSC	Safety Specialist Code (SR/CR)
M13	Drug Test Random Sampling Mail-out - 1995	TAU	Transfer Authority (License & Insurance Division)
M14	PRISM (Formerly CVIS) Power Unit Mail-out	TEL	Telephone Contact
M15	MX Carriers Beyond Commercial Zone Mail-out	TER	Terminal Review
M16	Scannable MCS-150 (Synectics Contract Mail- out Project)	UND	Undeliverable Address and No Activity for past 5 Years
M17	Cargo Tank 2.1, 2.2, 2.3 (Mail-out Project)	VIO	Violations (SR/CR)
M18	Drug Test Random Sampling Mail-out - 1996	WNL	PRISM (Formerly CVIS) Warning Letter
M19	Inspections 390.21 (Carrier's cited for Marking Requirement)	XEC	Educational Contact Review
M20	Drug Test Random Sampling Mail-out - 1997	XTA	Temporary Authority Application
M33	Enforcement Report	XPA	Permanent Authority Application

D. Glossary

Description **Term**

AAMVA American Association of Motor Vehicle Administrators

AAMVAnet A self-supporting, not-for-profit affiliate of the American Association of Motor

Vehicle Administrators. Also, the National telecommunications network that

links all Motor Vehicle Departments.

AAMVAnet/Nlets

Links the AAMVAnet WAN (wide area network) and the Nlets WAN. Performs translation functions for the formats used on each network. The Gateway

AAMVAnet/Nlets Gateway is physically located at the Nlets Operations Center in Phoenix, Arizona and the software is maintained by AAMVAnet.

AMIE American Message Interchange Envelope American National Standards Institute **ANSI**

CVIEW Commercial Vehicle Information Exchange Window **CVISN** Commercial Vehicle Information Systems and Networks.

CVIS Commercial Vehicle Information System. The former name for Performance

and Registration Information Systems Management (PRISM).

FHWA Federal Highway Administration

FMCSA Federal Motor Carrier Safety Administration

ID Identification

MEC Message Exchange Control

Motor Carrier Management Information System maintained by the U.S. **MCMIS**

Department of Transportation, Federal Motor Carrier Safety Administration.

MCSIP Motor Carrier Safety Improvement Process. This process involves a series of

> events which a motor carrier must perform when its record of Vehicle Inspections, Accidents, Law Enforcement Actions, and Compliance Reviews

indicate that its performance is deteriorating.

The MCSIP Step identifies the carrier's status in the safety improvement MCSIP Step

process. Carriers meeting the threshold criteria are identified and placed in

MCSIP.

NCB Network Control Block

NCS Network Control Software, an AAMVAnet-supported utility which routes

messages. NCS allows each State (and central site) to establish a session with

NCS, rather than requiring a session with each other AAMVAnet user.

Nlets A National Law Enforcement Telecommunication System operated by the

International Justice and Public Safety Sharing Network. A Wide Area

Network that links Federal, State, and Local Law Enforcement officers.

PRISM Performance and Registration Information Systems Management

A vehicle may be legally and actively registered in more that one State at one Registration, Active

SAFER Safety And Fitness Electronic Records SafeStat SafeStat is a program run monthly against the MCMIS Database to identify

motor carriers whose safety performance has fallen to a level requiring review. SafeStat identifies motor carriers whose vehicles have been found to be unsafe (through roadside inspections), have been involved in multiple accidents, or had several law enforcement actions taken. A SafeStat Indicator and a MCSIP Step are calculated for each motor carrier. The MCSIP Step identifies the carrier's status in the safety improvement process. Carriers meeting the

threshold criteria are identified and placed in MCSIP

SAFETYNET Software developed by the FMCSA and made available to States to send in

Vehicle Inspections, Accident Reports, Enforcement Actions, and Compliance

Review Reports on commercial vehicles.

Solicited Message This message contains information in response to some request. Usually, this

message is received by the originator of a transaction in response to the initial message of the transaction, e.g., the transaction originator sends the initial message of a transaction to request information. The response that is returned

to the transaction originator is the solicited message.

UNI Unified Network Interface. Software that resides on the State's host system

and bridges the gap between the State application and the AAMVAnet

network.

Unsolicited Message This message contains information not requested by the receiver. Usually it is

the first message within a transaction.

USDOT United States Department of Transportation

VIN Vehicle Identification Number

E. Error Message Text

- "100 File not available outside of normal hours"
- "101 File temporarily unavailable"
- "200 Required field missing <insert descriptive name from data dictionary, Appendix C>"
- "201 Invalid value for <insert descriptive name from data dictionary, Appendix C>"
- "202 Carrier must be active"
- "203 Inactive carrier must have MCSIP Step of '00' or '99""
- "204 'Out of Business' carrier cannot be active"
- "206 Carrier not on Carrier File, vehicle not added"
- "207 Date of Last Update on update record earlier than local record"
- "210 Carrier not in MCSIP"
- "217 Vehicle records must be targeted"
- "218 Carrier records must be targeted"
- "219 More than 1 Targeted Carrier"
- "220 PRISM State reporting another PRISM State vehicles"
- "304 A carrier identifier must be supplied"
- "309 Either VIN or (Plate Number and Registration Jurisdiction) must be present"
- "400 VIN contains leading space record rejected"
- "401 Vehicle Registration Record has been submitted via IRP Record rejected "
- "402 VIN contains a dash record rejected"
- "501-Dup Arbitrarily selected one record"
- "502-Dup except for USDOT Number, Rej both records"
- "503-Dup except for USDOT Num and VIN-Rej both rec"
- "601 Dup except for rep.P Jur investigate "
- "602 Dup except for rep.P Jur and Plate-investigate"
- "603 Dup except for rep.P Jur/USDOT Num-investigate"
- "604 Dup except for Reg Jurisdiction-investigate"
- "605 Dup except for Reg Jur/USDOT Num-investigate"
- "606 Dup except for Reg Jur/rep.P Jur-investigate"
- "607 Dup except for Reg Jur/rep.P Jur/USD N-inves"
- "608 Dup except for VIN/rep.P Jur-investigate"
- "609 Dup except for VIN/rep.P Jur/USD N-investigate"
- "610 Dup except for VIN and Reg Jur-investigate"
- "611 Dup except for VIN/Reg Jur/USD N-investigate"
- "612 Dup except for VIN/Reg Jur/rep.P Jur-investigate"
- "613 Dup Plate Number-investigate"
- "702 Incoming Vehicle File valid row count below acceptable threshold value"
- "703 Incoming Vehicle File skipped; previously processed file is more recent"
- "704 Incoming Vehicle File skipped; The State is not a PRISM State"

F. IRP Vehicle Status Codes

IRP Status Codes should conform to one of the four allowable values:

100 – Active

900 - Inactive

950 - Suspended due to Federal Out-of-Service Order

961 – Vehicle Suspension Code

Note: Other IRP Status Codes that have been used are under review by the CVISN Architecture Configuration Control Board (ACCB) for retention, thus additional codes might be added to the above list.

G. PRISM XML Targeted Vehicle & Carrier Output Transactions

G.1 Introduction

This appendix specifies the PRISM XML transactions that supplement the SAFER XML interface outlined in the SAFER 8.1 Interface Control Document. These transactions are provided so that State systems can obtain the vehicle or carrier portion of the PRISM Local Target file in XML format to help satisfy several PRISM program requirements. The T0041P transaction specifies the targeted vehicles. The MCSIP Step of the carrier responsible for safety of the vehicle, at the time of file generation, has been added as an additional field in the targeted vehicle record format. The T0042P transaction specifies the targeted carriers.

These Output Transactions are available as a full baseline set of targeted vehicles or carriers extracted from the SAFER-PRISM database.

G.2 PRISM Transaction Descriptions

G.2.1 Transaction ID

A PRISM Transaction shall have a Transaction ID that ends with the letter 'P'. In the case of the PRISM Targeted Vehicle Transaction, the Transaction ID is 'T0041P'. In the case of the PRISM Targeted Carrier Transaction, the Transaction ID is 'T0042P'.

G.2.2 Transaction Operation Tag

The value of the Transaction Operation Tag in the Transaction header must be the string "BASELINE".

G.2.3 Data Elements

The data contained in the T0041P transaction comes from two sources, CVIEW or equivalent IRP Cab Card Input transactions and PRISM Vehicle Files submitted by States using the PRISM Pilot Architecture method of providing SAFER with only target vehicle data. In both cases, data should exist for all fields, with the exception of the PVF_VEHICLE_FILE_CREATE_DATE and the CVISN_LAST_UPDATE_DATE. These two fields are mutually exclusive depending on which system submitted the record update in SAFER. Refer to table 2-1 for a definition of the value contained in these fields.

The data contained in the T0042P transaction comes from SAFER based on an extract from MCMIS. Data should exist for all fields. Refer to table 2-2 for a definition of the value contained in these fields.

G.2.4 T0041P, PRISM Targeted Vehicle Transaction

• Root Transaction Tag: T0041P

Interface Name: PRISMInterface Version: 4.1Transaction Version: 01.01

• Transaction Data Tag: PRISM_TARGETED_VEHICLE

G.2.4.1 Information Transmitted

The following PRISM Targeted Vehicle information shall be provided:

Table G1. T0041P - PRISM Targeted Vehicle (Output)

Description		XML Tag
Vehicle Identification Number (VIN)	Mandatory	VIN
License Plate Number	Mandatory	LICENSE_PLATE_NUMBER
License Plate Base Jurisdiction (State/Province)	Mandatory	REGISTRATION_JURISDICTION
Vehicle Registration Start Date	Optional	REGISTRATION_START_DATE
Vehicle Registration Expiration Date	Mandatory	REGISTRATION_EXPIRE_DATE
Make	Mandatory	MAKE
Model Year	Mandatory	MODEL_YEAR
Date of last vehicle update – CVIEW IRP Vehicle	Mandatory	CVISN_LAST_UPDATE_DATE
Or		Or
Date of PRISM Vehicle File extract by the State		PVF_VEHICLE_FILE_CREATE_DATE
Safety USDOT Number	Mandatory	SAFETY_CARRIER
MCSIP Step of Safety Carrier	Mandatory	MCSIP_STEP
Date of Last MCMIS Update to SAFER – CVIEW IRP Vehicle	Optional	LAST_CENSUS_UPDATE_DATE

G.2.4.2 Format/Record Layout

Refer to the schema for this transaction in the associated zip file, PRISM XML Schemas.zip, for the complete XML specification. This file is posted to the CVISN Website in the Documents > PRISM section: http://cvisn.fmcsa.dot.gov/default.aspx?PageID=prism

G.2.5 T0042P, PRISM Targeted Carrier Transaction

Root Transaction Tag: T0042P
Interface Name: PRISM
Interface Version: 4.1
Transaction Version: 01.01

• Transaction Data Tag: PRISM_TARGETED_CARRIER

G.2.5.1 Information Transmitted

The following PRISM Targeted Carrier information shall be provided:

Table G2. T0042P - PRISM Targeted Carrier (Output)

Description		XML Tag
USDOT Number	Mandatory	CARRIER_ID_NUMBER
Carrier Legal Name	Mandatory	CARRIER_NAME
Carrier "Doing Business As" Name	Optional	DBA_NAME
Physical Address Street	Mandatory	STREET
Physical Address City	Mandatory	CITY
Physical Address State Code	Mandatory	STATE
Physical Address Zip Code	Mandatory	ZIP_CODE
MCSIP Step	Mandatory	MCSIP_LEVEL
MCSIP Step Date	Mandatory	MCSIP_LEVEL_DATE
SAFESTAT Indicator	Optional	SAFESTAT_INDICATOR
SAFESTAT Date	Optional	SAFESTAT_DATE
MCMIS Last Update Date	Mandatory	LAST_UPDATE_DATE
MCMIS Last Update User ID	Mandatory	LAST_UPDATE_USERID

G.2.5.2 Format/Record Layout

Refer to the schema for this transaction in the associated zip file, PRISM XML Schemas.zip, for the complete XML specification. This file is posted to the CVISN Website in the Documents > PRISM section: http://cvisn.fmcsa.dot.gov/default.aspx?PageID=prism

G.2.6 Interface Terminals

G.2.6.1 Destination

A State system, such as CVIEW or its equivalent.


G.2.6.2 Communication/Transmission Process

The PRISM Targeted Vehicle Transaction T0041P and PRISM Targeted Carrier Transaction T0042P are generated by the PRISM Central Site and published in a ZIP file format on the Volpe Center FMCSA-Secure FTP (SFTP) server. States need to contact the FMCSA Help Desk at FMCSA-Secure FTP (SFTP) server. States need to contact the FMCSA Help Desk at FMCSA-Secure FTP (SFTP) server. States need to contact the FMCSA Help Desk at FMCTechSup@dot.gov to obtain the FMCSA IT System-to-System Account Request Form. Once the form is completed and faxed back to FMCSA, a private key file will be provided to the State to gain secure access to the server.

These files are also placed on the SAFER FTP server for downloading by approved States.

G.2.6.3 FMCSA SFTP Server Folder Structure


The root directory for the PRISM States logging in to the SFTP server is as follows:



Daily-generated PRISM Targeted Vehicle Transaction files are placed in the xml/T0041P folder under the prism-states root folder. Daily-generated PRISM Targeted Carrier Transaction files are placed in the xml/T0042P folder under the prism-states root folder. The T0041P, T0042P, and globalTypes XML schema files are located in the xml folder. At the start of the next scheduled run, the previous transaction file will be moved to the archive/xml/T0041P folder or archive/xml/T0042P folder as appropriate and the new file will be the only file in the production folder. There will be a month's worth of old daily files saved for historical purposes in the archive folder. If a transaction file was not generated for some reason during a scheduled generation run, the xml/T0041P folder and/or xml/T0042P folder will be empty.

G.2.6.4 FMCSA SAFER FTP Server Folder Structure

The SAFER FTP directory folder structure is as follows:



The PRISM XML Transactions are accessed via the PRISM folder. The structure under the PRISM folder follows the directory structure as described above for the Secure FTP Server Folder Structure. Also the availability of the transactions files is exactly as described above for the Secure FTP Server.

G.2.6.5 Standards and Conventions

- Production transaction files are named T0041P_YYYYMMDD.zip and T0042P_YYYYMMDD.zip.
- XML Parsers expect Unicode by default either UTF-8 or UTF-16. Any character set other than UTF-8 or UTF-16 must be specified with the "encoding" attribute in the XML header. For example:

<?xml version="1.0" encoding="US-ASCII"?> would be used if the ASCII character set were used to encode the document.

G.2.6.6 Conditional Processing

Conditional processing is at the discretion of the State system.

G.2.6.7 Data Validation

Data validation shall be done automatically in accordance with the schema defined for the transaction.

G.2.6.8 Error Processing/Recovery

Currently there are no errors handling procedures in place for PRISM.

G.2.6.9 Schedule/Frequency

The PRISM system is scheduled to create the T0041P transaction files by 6AM Mon-Sat EST and the T0042P transaction files by 6AM Mon-Fri EST . In the event that a file is not created as scheduled, that scheduled event will be skipped and a file will be generated during the next scheduled cycle.

G.2.6.10 Initiation Method

To initiate these transactions, the State system will log onto the FMCSA-SFTP site using a compatible Secure FTP client program to download the transaction file. The SFTP client and sample batch scripts for downloading the files are included in the PRISM SFTP Startup Package that is sent out by FMCSA Technical Support once the account request form is submitted and approved. Contact PRISMTechnicalSupport@dot.gov for assistance with connecting to the server.

Alternatively, if States are accessing these files via the SAFER FTP site they would follow the procedures as described in the SAFER 8.1 Interface Control Document for downloading files.

G.2.6.11 Synchronization/Dependencies

Files in the transaction directories are ordered by embedding a date and time stamp in the file name. The State system should process the files in the time-sequenced order.

G.2.6.12 Priority

The priority for these transactions is at the discretion of the State system.

G.2.6.13 Maximum Transaction Size

The PRISM T0041P Baseline file contains about 100,000 records, and that number will increase periodically as more States join the PRISM Program. The PRISM T0042P Baseline file may exceed 40,000 carrier records.

G.3 Example T0041P Transaction

Example showing 4 records from a file containing 88359 PRISM Targeted Vehicles

```
<?xml version = '1.0'?>
<T0041P xmlns="http://www.safersys.org/namespaces/T0041PV1"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://www.safersys.org/namespaces/T0041PV1.xsd">
 <INTERFACE>
  <NAME>PRISM</NAME>
  <VERSION>04.1</VERSION>
 </INTERFACE>
 <TRANSACTION>
  <VERSION>01.01</VERSION>
  <OPERATION>BASELINE</OPERATION>
  <DATE_TIME>2009-02-10T03:26:51</DATE_TIME>
  <TZ>ED</TZ>
 </TRANSACTION>
 <PRISM_TARGETED_VEHICLE num="1">
  <VIN>1FUYSSEB3XLA35039</VIN>
  <SAFETY CARRIER>1620236</SAFETY CARRIER>
  <MCSIP_STEP>31</MCSIP_STEP>
  <LICENSE_PLATE_NUMBER>ICIC4J21/LICENSE_PLATE_NUMBER>
  <REGISTRATION JURISDICTION>GA</REGISTRATION JURISDICTION>
  <REGISTRATION START DATE>2008-11-01
  <REGISTRATION_EXPIRE_DATE>2009-11-30</REGISTRATION_EXPIRE_DATE>
  <MAKE>FRHT</MAKE>
  <MODEL_YEAR>1999</MODEL_YEAR>
  <LAST_CENSUS_UPDATE_DATE>2009-02-10/LAST_CENSUS_UPDATE_DATE>
  <PVF_VEHICLE_FILE_CREATE_DATE>2009-02-10</PVF_VEHICLE_FILE_CREATE_DATE>
 </PRISM_TARGETED_VEHICLE>
 <PRISM_TARGETED_VEHICLE num="2">
  <VIN>1FUPDWEB6YDF54658</VIN>
  <SAFETY CARRIER>1404087</SAFETY CARRIER>
  <MCSIP STEP>10</MCSIP STEP>
  <LICENSE PLATE NUMBER>ICIC44P9</LICENSE PLATE NUMBER>
  <REGISTRATION_JURISDICTION>GA</REGISTRATION_JURISDICTION>
  <REGISTRATION START DATE>2009-07-01
  <REGISTRATION EXPIRE DATE>2009-07-31
  <MAKE>FRHT</MAKE>
  <MODEL_YEAR>2000</MODEL_YEAR>
  <LAST_CENSUS_UPDATE_DATE>2009-02-10</LAST_CENSUS_UPDATE_DATE>
  <PVF_VEHICLE_FILE_CREATE_DATE>2009-02-10/PVF_VEHICLE_FILE_CREATE_DATE>
 </PRISM TARGETED VEHICLE>
 <PRISM TARGETED VEHICLE num="3">
  <VIN>1FUPCSZB8WP887281</VIN>
  <SAFETY CARRIER>668154</SAFETY CARRIER>
  <MCSIP STEP>10</MCSIP STEP>
  <LICENSE PLATE NUMBER>ICIC8D77</LICENSE PLATE NUMBER>
  <REGISTRATION JURISDICTION>GA</REGISTRATION JURISDICTION>
  <REGISTRATION START DATE>2008-04-21</REGISTRATION START DATE>
  <REGISTRATION_EXPIRE_DATE>2009-03-31</re>/REGISTRATION_EXPIRE DATE>
  <MAKE>FRHT</MAKE>
  <MODEL YEAR>1998</MODEL YEAR>
  <LAST CENSUS UPDATE DATE>2009-02-10
/LAST CENSUS UPDATE DATE>
```

```
<PVF_VEHICLE_FILE_CREATE_DATE>2009-02-10/PVF_VEHICLE_FILE_CREATE_DATE>
 </PRISM TARGETED VEHICLE>
 <PRISM_TARGETED_VEHICLE num="88359">
  <VIN>1FUPCSZB8YDA97647</VIN>
  <SAFETY_CARRIER>255268</SAFETY_CARRIER>
  <MCSIP_STEP>13</MCSIP_STEP>
  <LICENSE_PLATE_NUMBER>P189692</LICENSE_PLATE_NUMBER>
  <REGISTRATION_JURISDICTION>LA</REGISTRATION_JURISDICTION>
  <REGISTRATION_START_DATE>2009-01-01</REGISTRATION_START_DATE>
  <REGISTRATION_EXPIRE_DATE>2009-12-31</re>/REGISTRATION_EXPIRE_DATE>
  <MAKE>FRHT</MAKE>
  <MODEL_YEAR>2000</MODEL_YEAR>
  <LAST CENSUS UPDATE DATE>2009-02-10
/LAST CENSUS UPDATE DATE>
  <CVISN_LAST_UPDATE_DATE>2009-01-27/CVISN_LAST_UPDATE_DATE>
 </PRISM_TARGETED_VEHICLE>
</T0041P>
```

G.4 Example T0042P Transaction

Example showing 3 records from a file containing 39365 PRISM Targeted Carriers

```
<?xml version = '1.0'?>
<T0042P xmlns="http://prismws.fmcsa.dot.gov/namespaces/T0042PV1"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://prismws.fmcsa.dot.gov/namespaces/T0042PV1.xsd">
 <INTERFACE>
  <NAME>PRISM</NAME>
  <VERSION>04.1</VERSION>
 </INTERFACE>
 <TRANSACTION>
  <VERSION>01.01</VERSION>
  <OPERATION>BASELINE</OPERATION>
  <DATE_TIME>2009-02-09T04:13:09</DATE_TIME>
  <TZ>ED</TZ>
 </TRANSACTION>
 <PRISM_TARGETED_CARRIER num="1">
  <CARRIER_ID_NUMBER>611849</CARRIER_ID_NUMBER>
  <CARRIER NAME>CASCADE DRILLING INC OREGON</CARRIER NAME>
  <STREET>6400 SE 101ST AVENUE UNIT 2D</STREET>
  <CITY>PORTLAND</CITY>
  <STATE>OR</STATE>
  <ZIP CODE>97266
                   </ZIP_CODE>
  <COUNTY CODE>51</COUNTY CODE>
  <MCSIP LEVEL>2</MCSIP LEVEL>
  <MCSIP_LEVEL_DATE>20090123</MCSIP_LEVEL_DATE>
  <SAFESTAT_INDICATOR>200.4</SAFESTAT_INDICATOR>
  <SAFESTAT_DATE>20090123</SAFESTAT_DATE>
  <LAST_UPDATE_DATE>20061020</LAST_UPDATE_DATE>
  <LAST_UPDATE_USERID>NNAI </LAST_UPDATE_USERID>
 </PRISM_TARGETED_CARRIER>
 <PRISM TARGETED CARRIER num="2">
  <CARRIER ID NUMBER>626818</P>
  <CARRIER NAME>RUFINO CAMPOS ARREDONDO</CARRIER NAME>
  <STREET>AVE ROSALES S/N</STREET>
  <CITY>GUASAVE</CITY>
  <STATE>SI</STATE>
  <ZIP CODE>81029
                  </ZIP_CODE>
  <MCSIP_LEVEL>2</MCSIP_LEVEL>
  <MCSIP_LEVEL_DATE>20081121</MCSIP_LEVEL_DATE>
  <SAFESTAT_INDICATOR>184.07</SAFESTAT_INDICATOR>
  <SAFESTAT_DATE>20090123</SAFESTAT_DATE>
  <LAST UPDATE DATE>20070308</LAST UPDATE DATE>
  <LAST UPDATE USERID>ASTORM1 </LAST UPDATE USERID>
 </PRISM TARGETED CARRIER>
 <PRISM TARGETED CARRIER num="39365">
  <CARRIER ID NUMBER>1662712</CARRIER ID NUMBER>
  <CARRIER_NAME>JAE & DAYSON SERVICES LLC</CARRIER_NAME>
  <STREET>2078 SUGAR CREEK FALL COURT SE</STREET>
  <CITY>ATLANTA</CITY>
  <STATE>GA</STATE>
  <ZIP CODE>30316
                   </ZIP CODE>
  <COUNTY_CODE>121</COUNTY_CODE>
```

<MCSIP_LEVEL>89</MCSIP_LEVEL>
<MCSIP_LEVEL_DATE>20090123</MCSIP_LEVEL_DATE>
<SAFESTAT_INDICATOR>246.87</SAFESTAT_INDICATOR>
<SAFESTAT_DATE>20090123</SAFESTAT_DATE>
<LAST_UPDATE_DATE>20090105</LAST_UPDATE_DATE>
<LAST_UPDATE_USERID>MCMIS </LAST_UPDATE_USERID>
</PRISM_TARGETED_CARRIER>
</T0042P>

H PRISM Web Services

H.1 Introduction

This appendix specifies the interface and requirements for PRISM Web Services. PRISM Web Services provides near real-time query capability for client systems accessing PRISM data. The Web Services allow PRISM states to do queries to the PRISM central site to check carrier and vehicle status. As an example scenario, a roadside officer issues a carrier or vehicle inquiry to a PRISM state system, the PRISM state system performs a web services query to the PRISM Web Services and passes the response back to the roadside.




Figure H 1.0 - PRISM Web Services Systems Interaction

H1.2 Interface Summary

A PRISM state will utilize this interface to perform query operations obtaining XML responses. The XML response will conform to the specifications of the PRISM XML transactions. To accomplish this interaction, the PRISM state system shall interact with the PRISM Central Site the manner described below.

A PRISM state system connects to the PRISM Web Services Interface using the standard SOAP and WSDL protocols. The Web Services application provides connectivity to the PRISM Web Services Server. In order to access this server a VPN account is required. Contact FMCTechSup@Dot.Gov for information on acquiring this account. Additionally a PRISM user account and password are required to perform queries to the PRISM Web Services. Contact PRISMTechnicalSupport@Dot.Gov for information on acquiring this account.

H1.3 Processing Overview

The steps in a PRISM Web Services transaction are:

- 1. The state system makes a method or function call invoking a web service client method.
- The state system constructs a SOAP message containing the method name and parameters for the desired transaction.
- 3. The state system sends the SOAP message to the PRISM Central Site over the network using the HTTP protocol.
- 4. PRISM Web Services extracts the XML transaction parameters from the incoming SOAP message.
- 5. PRISM Web Services uses that information to create an instance of an XML transaction class and uses attributes of the class to perform the transaction, producing an XML output document. The output document contains the data resulting from the query, or a response if the query failed or did not return any data.
- 6. PRISM Web Services bundles the XML output file into an outgoing SOAP message.
- 7. The SOAP message is sent to the state system over the Internet using the HTTP protocol.
- 8. The state system's toolkit-generated code extracts the XML output from the SOAP message.
- 9. The original method or function called by the state system receives an XML document as its return value.

H1.4 Applicable Standards

The following standards apply:

- XML: The following link hosted by OASIS (http://www.oasis-open.org/) provides an XML core standard reference: http://xml.coverpages.org/xml.html
- SOAP 1.1 Specification http://www.w3.org/TR/2000/NOTE-SOAP-20000508/
- WSDL 1.1 Specification http://www.w3.org/TR/wsdl

H2 PRISM Web Services Methods

PRISM Web Services supports the following methods. All web services methods require a PRISM userid and password.

Method Name	Argument	Entity	Result
PRISMVehicleT0041PbyUSDOT	USDOT	Vehicle	Targeted Vehicle
	userId		
	password		(non-targeted vehicles are
			not returned)
PRISMVehicleT0041PbyVIN	VIN	Vehicle	Targeted Vehicle
	userId		
	password		(non-targeted vehicles are
			not returned)
PRISMVehicleT0041PbyLicense	Plate	Vehicle	Targeted Vehicle
	State		
	userId		(non-targeted vehicles are
	password		not returned)
PRISMCarrierT0042P	USDOT	Carrier / [Vehicle]	Targeted Carrier / [may
	includeVehicle		include Targeted Vehicles
	userId		if that option is selected]
	password		
			(non-targeted carriers are
			not returned)
PRISMUserLogin	userId	PRISM User Profile	String
	password		
PRISMUserChangePassword	userId	PRISM User Profile	String
	newPassword		
	oldPassword		
PRISMUserUpdate	userId	PRISM User Profile	String
	password		
	firstName		
	lastName		
	street1		
	street2		
	city		
	state		
	zipcode		
	phone		
	email		

Table H1 - PRISM Web Services Web Services Methods

For all web services methods the source of the MCSIP Step of the carrier is returned. In most instances the source will be "MCMIS". If the MCMIS database is not available the source of the MCSIP Step will be "SAFER". All other information returned is obtained from the SAFER/PRISM database.

H2.1 PRISMVehicleT0041PbyUSDOT

This web method will use the USDOT number to query target vehicle information, it will return vehicle information in T0041P xml.

Argument	Contents
USDOT	USDOT number
userid	User id for authentication
Password	Password for authentication

This web method will return all targeted vehicles that are associated with the carrier of USDOT in T0041P xml.

```
<?xml version="1.0" encoding="utf-8" ?>
<T0041P>
      <INTERFACE>
            <NAME>PRISM</NAME>
            <VERSION>4.1</VERSION>
      </INTERFACE>
      <TRANSACTION>
            <VERSION>01.01</VERSION>
            <OPERATION>Query by DOT
            <DATE_TIME>2009-07-15T14:58:26
            <TZ>ED</TZ>
      </TRANSACTION>
      <PRISM TARGETED VEHICLE num="1">
            <VIN>1FUYDSEB4XLA56847</VIN>
            <SAFETY CARRIER>1306990</SAFETY CARRIER>
            <MCSIP STEP>10</MCSIP STEP>
            <SOURCE>MCMIS</SOURCE>
            <LICENSE PLATE NUMBER>ICIC87T1</LICENSE PLATE NUMBER>
            <REGISTRATION_JURISDICTION>GA</REGISTRATION_JURISDICTION>
            <REGISTRATION START DATE>2008-01-01/REGISTRATION START DATE>
            <REGISTRATION_EXPIRE_DATE>2009-01-31/REGISTRATION_EXPIRE_DATE>
            <MAKE>FRHT</MAKE>
            <MODEL YEAR>1999</MODEL YEAR>
            <LAST CENSUS UPDATE DATE>2008-07-15</LAST CENSUS UPDATE DATE>
      </PRISM TARGETED VEHICLE>
</T0041P>
```

H2.2 PRISMVehicleT0041PbyLicense

This web method will use the license plate and jurisdiction to query target vehicle information, it will return vehicle information T0041P xml.

Argument	Contents
Plate	License Plate Number
State	Jurisdiction
userid	User id for authentication
Password	Password for authentication

This web method will return all targeted vehicles that matched the license plate query parameters in T0041P xml.

```
<?xml version="1.0" encoding="utf-8" ?>
<T0041P>
       <INTERFACE>
              <NAME>PRISM</NAME>
              <VERSION>4.1</VERSION>
       </INTERFACE>
       <TRANSACTION>
              <VERSION>01.01</VERSION>
              <OPERATION>Query by License Plate
              <DATE_TIME> 2009-07-15T14:59:35
              <TZ>ED</TZ>
       </TRANSACTION>
       <PRISM_TARGETED_VEHICLE num="1">
              <VIN>1XP5DB9X8SN358926</VIN>
              <SAFETY_CARRIER>1306990</SAFETY_CARRIER>
              <MCSIP_STEP>10</MCSIP_STEP>
              <SOURCE>MCMIS</SOURCE>
              <LICENSE_PLATE_NUMBER>ICIC7F43</LICENSE_PLATE_NUMBER>
              <REGISTRATION_JURISDICTION>GA</REGISTRATION_JURISDICTION>
              <REGISTRATION_START_DATE>2008-04-08</REGISTRATION_START_DATE>
<REGISTRATION_EXPIRE_DATE>2009-04-30</re>/REGISTRATION_EXPIRE_DATE>
              <MAKE>PTRB</MAKE>
              <MODEL_YEAR>1995</MODEL_YEAR>
              <LAST_CENSUS_UPDATE_DATE>2008-07-
       15</LAST_CENSUS_UPDATE_DATE>
       </PRISM_TARGETED_VEHICLE>
</T0041P>
```

H2.3 PRISMVehicleT0041PbyVIN

This web method will use the vehicle VIN number to query target vehicle information, it will return vehicle information in T0041P xml.

Argument	Contents
VIN	VIN
userid	User id for authentication
Password	Password for authentication

This web method will return all target vehicle records that matched the VIN query parameter in T0041P xml.

```
<?xml version="1.0" encoding="utf-8" ?>
<T0041P>
       <INTERFACE>
             <NAME>PRISM</NAME>
             <VERSION>4.1</VERSION>
       </INTERFACE>
       <TRANSACTION>
             <VERSION>01.01</VERSION>
             <OPERATION>Query by VIN</OPERATION>
             <DATE_TIME>2009-07-15T15:00:18</DATE_TIME>
             <TZ>ED</TZ>
       </TRANSACTION>
       <PRISM_TARGETED_VEHICLE num="1">
             <VIN>1FUYSSEB2WL827193</VIN>
             <SAFETY_CARRIER>1306990</SAFETY_CARRIER>
             <MCSIP_STEP>10</MCSIP_STEP>
             <SOURCE>MCMIS</SOURCE>
             <LICENSE_PLATE_NUMBER>ICIC9I33</LICENSE_PLATE_NUMBER>
             <REGISTRATION_JURISDICTION>GA</REGISTRATION_JURISDICTION>
             <REGISTRATION_START_DATE>2008-04-19</regISTRATION_START_DATE>
             <REGISTRATION_EXPIRE_DATE>2009-04-30/REGISTRATION_EXPIRE_DATE>
             <MAKE>FRHT</MAKE>
             <MODEL YEAR>1998</MODEL YEAR>
             <LAST CENSUS UPDATE DATE>2008-07-
       15</LAST_CENSUS_UPDATE_DATE>
       </PRISM TARGETED VEHICLE>
</T0041P>
```

H2.4 PRISMCarrierT0042P

This web method will use the USDOT number to query a targeted carrier from the SAFER/PRISM database, it will return the carrier information in the T0042P xml.

Argument	Contents
USDOT	US DOT number
includeVehicle	True or false, if it is true, the vehicle information will be included; otherwise, the vehicle information will be excluded in the resultant xml.
userid	User id for authentication
Password	Password for authentication

This web method will return the targeted carrier information in T0042P xml. If includeVehicle is true, all associated vehicle information will be included, and the vehicle xml will be a sub node of the carrier node.

```
<?xml version="1.0" encoding="utf-8" ?>
<T0042PV1>
      <INTERFACE>
             <NAME>PRISM</NAME>
             <VERSION>04.1</VERSION>
      </INTERFACE>
      <TRANSACTION>
             <VERSION>01.01</VERSION>
             <OPERATION>T0042P</OPERATION>
             <DATE_TIME>2009-07-15T14:57:36
             <TZ>ED</TZ>
      </TRANSACTION>
       <CARRIER>
             <DOT>1306990</DOT>
             <MCSIP LEVEL>10</MCSIP LEVEL>
             <SOURCE>MCMIS</SOURCE>
             <CARRIER_NAME>TRIUMPH LOGISTICS INC</CARRIER_NAME>
             <SAFESTAT INDICATOR>318.24</SAFESTAT INDICATOR>
             <STREET>487 BOURNE AVE</STREET>
             <CITY>GARDEN CITY</CITY>
             <CARRIER_FILE_CREATE_DATE>20081106/CARRIER_FILE_CREATE_DATE>
             <STATE>GA</STATE>
             <LAST_UPDATE_DATE>20080218</LAST_UPDATE_DATE>
             <ZIP_CODE>31408</ZIP_CODE>
      </CARRIER>
</T0042PV1>
```

H2.5 PRISMUserLogin

This web method is used to validate the user id and password.

Argument	Contents
userid	User id for authentication
Password	Password for authentication

This web method will use the userid and password to authenticate a user. It may return the following string:

User - Valid PRISM Web Services User Administrator - PRISM Web Services Administrator

Password - Valid PRISM Web Services User, password must be

changed

Disable - User disabled

PasswordExpired - User Password expired

UserLocked - User locked

InvalidUser - User is invalid, userid does not exist in PRISM

database

InvalidPassword - User's password is invalid, userid exists in

database,

but the password is invalid

NotAvailable - PRISM User Status is not available

PRISM web services consumer should use this web method to validate if the PRISM userid and password are valid. If the PRISM user is locked or password is expired, the consumer must change the password.

H2.6 PRISMUserChangepassword

This web method is used by web services consumer to change the PRISM user's password.

Argument	Contents
userid	User id for authentication
newPassword	Password to be set to
oldPassword	Password for authentication

This web method will use the userid and oldPassword to authenticate the user.

Disable - User disabled

InvalidUser - User is invalid, userid does not exist in PRISM

database

InvalidPassword - User's password is invalid, userid exists in

database, but the password is invalid

NotAvailable - PRISM User Status is not available

PasswordInvalid - Invalid New Password
PasswordReuse - New Password is reused

PasswordUpdated - Password updated without error

PasswordUpdateError - Update password failed with error

H2.7 PRISMUserUpdate

This web method is used to update a PRISM user profile.

Argument	Contents
userid	User id for authentication
password	Password for authentication
firstName	First name
lastName	Last name
Street1	Address
Street2	Address
City	City
State	State
Zipcode	Zip Code
Phone	Phone
Email	Email address

This web method enables a PRISM user to update their profile.

H3 PRISM Web Services WSDL

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:http="http://schemas.xmlsoap.org/wsdl/http/"</pre>
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" xmlns:s="http://www.w3.org/2001/XMLSchema"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:tns="http://prismws.fmcsa.dot.gov/PRISMWebServices"
xmlns:tm="http://microsoft.com/wsdl/mime/textMatching/" xmlns:mime="http://schemas.xmlsoap.org/wsdl/mime/"
targetNamespace="http://prismws.fmcsa.dot.gov/PRISMWebServices"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
 <wsdl:types>
  <s:schema elementFormDefault="qualified"</p>
targetNamespace="http://prismws.fmcsa.dot.gov/PRISMWebServices">
   <s:element name="PRISMVehicleT0041PbyUSDOT">
    <s:complexType>
     <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="USDOT" type="s:string" />
      <s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
      <s:element minOccurs="0" maxOccurs="1" name="password" type="s:string" />
     </s:sequence>
    </s:complexType>
   </s:element>
   <s:element name="PRISMVehicleT0041PbyUSDOTResponse">
    <s:complexType>
     <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="PRISMVehicleT0041PbyUSDOTResult">
       <s:complexType mixed="true">
         <s:sequence>
          <s:any />
```

```
</s:sequence>
    </s:complexType>
   </s:element>
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMVehicleT0041PbyVIN">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="VIN" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="password" type="s:string" />
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMVehicleT0041PbyVINResponse">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="PRISMVehicleT0041PbyVINResult">
    <s:complexType mixed="true">
     <s:sequence>
      <s:any />
     </s:sequence>
    </s:complexType>
   </s:element>
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMVehicleT0041PbyLicense">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="Plate" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="State" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="password" type="s:string" />
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMVehicleT0041PbyLicenseResponse">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="PRISMVehicleT0041PbyLicenseResult">
    <s:complexType mixed="true">
     <s:sequence>
      <s:any />
     </s:sequence>
    </s:complexType>
   </s:element>
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMCarrierT0042P">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="USDOT" type="s:string" />
   <s:element minOccurs="1" maxOccurs="1" name="includeVehicle" type="s:boolean" />
```

```
<s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="password" type="s:string" />
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMCarrierT0042PResponse">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="PRISMCarrierT0042PResult">
    <s:complexType mixed="true">
     <s:sequence>
      <s:any />
     </s:sequence>
    </s:complexType>
   </s:element>
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMUserUpdate">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="password" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="firstName" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="lastName" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="street1" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="street2" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="city" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="state" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="zipcode" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="phone" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="email" type="s:string" />
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMUserUpdateResponse">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="PRISMUserUpdateResult" type="s:string" />
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMUserLogin">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
   <s:element minOccurs="0" maxOccurs="1" name="password" type="s:string" />
  </s:sequence>
 </s:complexType>
</s:element>
<s:element name="PRISMUserLoginResponse">
 <s:complexType>
  <s:sequence>
   <s:element minOccurs="0" maxOccurs="1" name="PRISMUserLoginResult" type="s:string" />
  </s:sequence>
 </s:complexType>
```

```
</s:element>
  <s:element name="PRISMUserChangePassword">
   <s:complexType>
    <s:sequence>
     <s:element minOccurs="0" maxOccurs="1" name="userId" type="s:string" />
     <s:element minOccurs="0" maxOccurs="1" name="newPassword" type="s:string" />
     <s:element minOccurs="0" maxOccurs="1" name="oldPassword" type="s:string" />
    </s:sequence>
   </s:complexType>
  </s:element>
  <s:element name="PRISMUserChangePasswordResponse">
   <s:complexType>
    <s:sequence>
     <s:element minOccurs="0" maxOccurs="1" name="PRISMUserChangePasswordResult" type="s:string" />
    </s:sequence>
   </s:complexType>
 </s:element>
</s:schema>
</wsdl:types>
<wsdl:message name="PRISMVehicleT0041PbyUSDOTSoapIn">
<wsdl:part name="parameters" element="tns:PRISMVehicleT0041PbyUSDOT" />
</wsdl:message>
<wsdl:message name="PRISMVehicleT0041PbyUSDOTSoapOut">
<wsdl:part name="parameters" element="tns:PRISMVehicleT0041PbyUSDOTResponse" />
</wsdl:message>
<wsdl:message name="PRISMVehicleT0041PbyVINSoapIn">
<wsdl:part name="parameters" element="tns:PRISMVehicleT0041PbyVIN" />
</wsdl:message>
<wsdl:message name="PRISMVehicleT0041PbyVINSoapOut">
<wsdl:part name="parameters" element="tns:PRISMVehicleT0041PbyVINResponse" />
</wsdl:message>
<wsdl:message name="PRISMVehicleT0041PbyLicenseSoapIn">
<wsdl:part name="parameters" element="tns:PRISMVehicleT0041PbyLicense" />
</wsdl:message>
<wsdl:message name="PRISMVehicleT0041PbyLicenseSoapOut">
<wsdl:part name="parameters" element="tns:PRISMVehicleT0041PbyLicenseResponse" />
</wsdl:message>
<wsdl:message name="PRISMCarrierT0042PSoapIn">
<wsdl:part name="parameters" element="tns:PRISMCarrierT0042P" />
</wsdl:message>
<wsdl:message name="PRISMCarrierT0042PSoapOut">
<wsdl:part name="parameters" element="tns:PRISMCarrierT0042PResponse" />
</wsdl:message>
<wsdl:message name="PRISMUserUpdateSoapIn">
<wsdl:part name="parameters" element="tns:PRISMUserUpdate" />
</wsdl:message>
<wsdl:message name="PRISMUserUpdateSoapOut">
<wsdl:part name="parameters" element="tns:PRISMUserUpdateResponse" />
</wsdl:message>
<wsdl:message name="PRISMUserLoginSoapIn">
<wsdl:part name="parameters" element="tns:PRISMUserLogin" />
</wsdl:message>
<wsdl:message name="PRISMUserLoginSoapOut">
<wsdl:part name="parameters" element="tns:PRISMUserLoginResponse" />
</wsdl:message>
<wsdl:message name="PRISMUserChangePasswordSoapIn">
```

```
<wsdl:part name="parameters" element="tns:PRISMUserChangePassword" />
 </wsdl:message>
 <wsdl:message name="PRISMUserChangePasswordSoapOut">
  <wsdl:part name="parameters" element="tns:PRISMUserChangePasswordResponse" />
 </wsdl:message>
 <wsdl:portType name="PRISMWebServiceSoap">
  <wsdl:operation name="PRISMVehicleT0041PbyUSDOT">
   <wsdl:input message="tns:PRISMVehicleT0041PbyUSDOTSoapIn" />
   <wsdl:output message="tns:PRISMVehicleT0041PbyUSDOTSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="PRISMVehicleT0041PbyVIN">
   <wsdl:input message="tns:PRISMVehicleT0041PbyVINSoapIn" />
   <wsdl:output message="tns:PRISMVehicleT0041PbyVINSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="PRISMVehicleT0041PbyLicense">
   <wsdl:input message="tns:PRISMVehicleT0041PbyLicenseSoapIn" />
   <wsdl:output message="tns:PRISMVehicleT0041PbyLicenseSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="PRISMCarrierT0042P">
   <wsdl:input message="tns:PRISMCarrierT0042PSoapIn" />
   <wsdl:output message="tns:PRISMCarrierT0042PSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="PRISMUserUpdate">
   <wsdl:input message="tns:PRISMUserUpdateSoapIn" />
   <wsdl:output message="tns:PRISMUserUpdateSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="PRISMUserLogin">
   <wsdl:input message="tns:PRISMUserLoginSoapIn" />
   <wsdl:output message="tns:PRISMUserLoginSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="PRISMUserChangePassword">
   <wsdl:input message="tns:PRISMUserChangePasswordSoapIn" />
   <wsdl:output message="tns:PRISMUserChangePasswordSoapOut" />
  </wsdl:operation>
 </wsdl:portType>
 <wsdl:binding name="PRISMWebServiceSoap" type="tns:PRISMWebServiceSoap">
  <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
  <wsdl:operation name="PRISMVehicleT0041PbyUSDOT">
   <soap:operation
soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMVehicleT0041PbyUSDOT"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMVehicleT0041PbyVIN">
   <soap:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMVehicleT0041PbyVIN"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
```

```
</wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMVehicleT0041PbyLicense">
   <soap:operation
soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMVehicleT0041PbyLicense"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMCarrierT0042P">
   <soap:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMCarrierT0042P"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMUserUpdate">
   <soap:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMUserUpdate"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMUserLogin">
   <soap:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMUserLogin"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMUserChangePassword">
   <soap:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMUserChangePassword"
style="document" />
   <wsdl:input>
    <soap:body use="literal" />
   </wsdl:input>
   <wsdl:output>
    <soap:body use="literal" />
   </wsdl:output>
  </wsdl:operation>
 </wsdl:binding>
 <wsdl:binding name="PRISMWebServiceSoap12" type="tns:PRISMWebServiceSoap">
```

```
<soap12:binding transport="http://schemas.xmlsoap.org/soap/http"</pre>
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"/>
  <wsdl:operation name="PRISMVehicleT0041PbyUSDOT">
   <soap12:operation
soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMVehicleT0041PbyUSDOT"
style="document" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMVehicleT0041PbyVIN">
   <soap12:operation
soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMVehicleT0041PbyVIN" style="document"
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"/>
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMVehicleT0041PbyLicense">
   <soap12:operation
soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMVehicleT0041PbyLicense"
style="document" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMCarrierT0042P">
   <soap12:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMCarrierT0042P"
style="document" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMUserUpdate">
   <soap12:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMUserUpdate"
style="document" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMUserLogin">
```

```
<soap12:operation soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMUserLogin"</pre>
style="document" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"/>
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="PRISMUserChangePassword">
   <soap12:operation
soapAction="http://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMUserChangePassword" style="document"
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"/>
   <wsdl:input>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:input>
   <wsdl:output>
    <soap12:body use="literal" xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" />
   </wsdl:output>
  </wsdl:operation>
 </wsdl:binding>
 <wsdl:service name="PRISMWebService">
  <wsdl:port name="PRISMWebServiceSoap" binding="tns:PRISMWebServiceSoap">
   <soap:address location="https://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMWebService.asmx" />
  </wsdl:port>
  <wsdl:port name="PRISMWebServiceSoap12" binding="tns:PRISMWebServiceSoap12">
   <soap12:address location="https://prismws.fmcsa.dot.gov/PRISMWebServices/PRISMWebService.asmx"
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"/>
  </wsdl:port>
 </wsdl:service>
</wsdl:definitions>
```